


DC-8 Airborne Science Experimenter Handbook

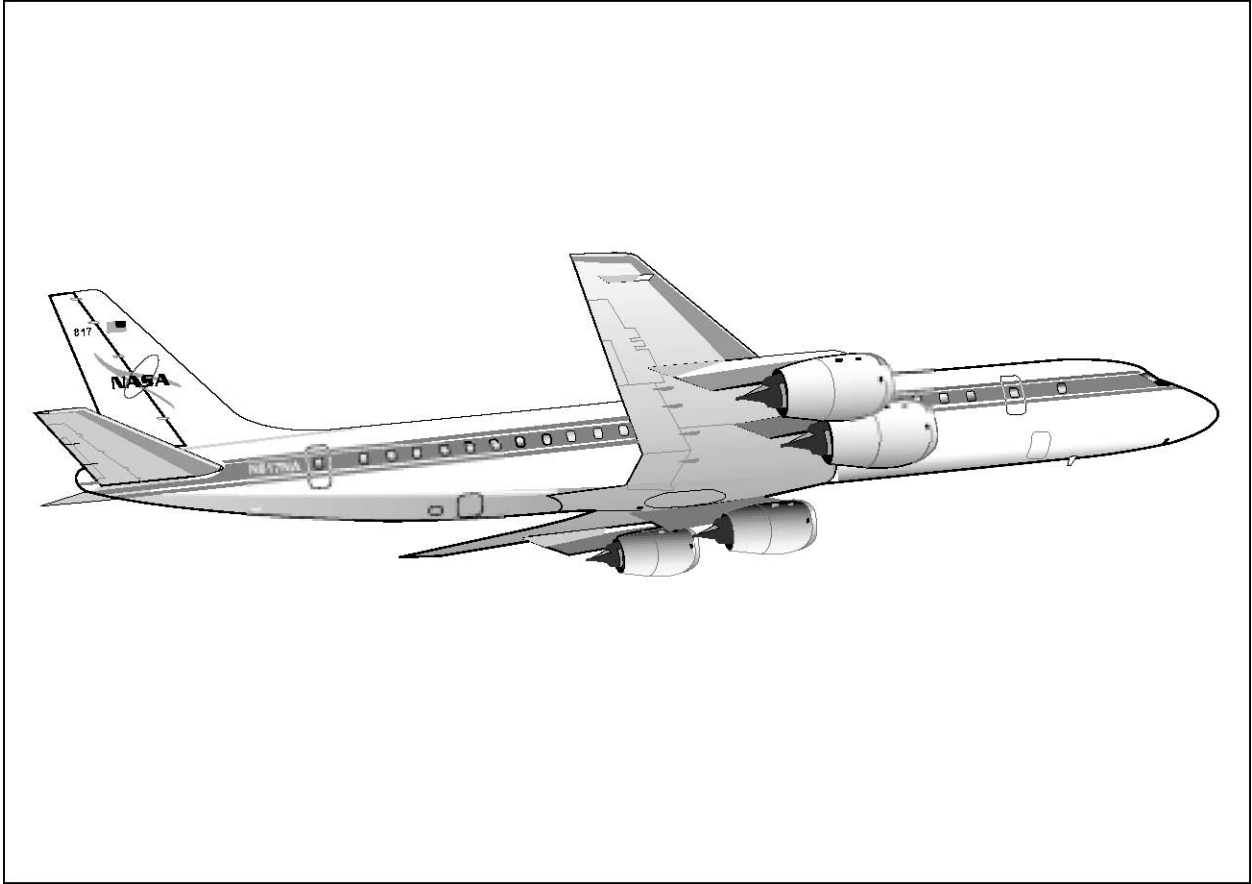

National Aeronautics and Space Administration
Dryden Flight Research Center
Aircraft Operations Facility
Palmdale, CA 93550

January 2011

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

This page intentionally left blank

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

TABLE OF CONTENTS

	Ch/Pg
INTRODUCTION/Nomenclature	1
CHAPTER 1	1-1
AIRCRAFT PERFORMANCE	1-1
Basic Aircraft Performance	1-1
Frequency and Duration of Flights	1-7
Cabin Environment	1-8
Aircraft Stability	1-8
Aircraft Attitude	1-8
Worldwide Capability	1-9
CHAPTER 2	2-1
COMMUNICATION AND NAVIGATION	2-1
Basic Equipment and Navigation	2-1
Navigation Accuracy	2-3
Navigation Planning	2-5
Radar Tracking Beacons	2-5
CHAPTER 3	3-1
INTERIOR DIMENSIONS AND SUPPORT FACILITIES	3-1
General Information	3-1
Cabin and Cargo Areas	3-1
Fuselage Access	3-10
Support Facilities	3-13
CHAPTER 4	4-1
FUSELAGE VIEWPORTS AND WINDOWS	4-1
General Information	4-1
General Description	4-1
Configuration Details	4-4
Special Inserts	4-4
Optical Windows	4-5
External Airflow Parameters	4-16
CHAPTER 5	5-1
EXPERIMENT CONSTRUCTION AND INSTALLATION	5-1
General Information	5-1
General Arrangement	5-1
Construction Guidelines	5-2
Aircraft Vibration	5-6

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

	Ch/Pg
Structural Attachments	5-9
Standard Equipment Racks	5-19
Mounting Techniques	5-22
Equipment Certification	5-33
Hazard Equipment and Materials Certification	5-34
CHAPTER 6	6-1
ELECTRICAL POWER	6-1
General Information	6-1
Power Sources and Frequency Converters	6-1
Experimenters Power Stations	6-1
Batteries	6-2
Uninterruptable Power Supplies (UPS)	6-8
Aircraft Ground System	6-9
Electromagnetic Interference	6-9
Electrical Safety	6-10
Heaters	6-13
Experiment Cabling	6-13
Equipment Certification	6-14
CHAPTER 7	7-1
DATA DISTRIBUTION SYSTEM (DDS)	7-1
General Information	7-1
REVEAL/NASDAT System	7-1
On-board Ethernet network	7-1
Network Services	7-2
The Airborne Science Data Environment (ASDE)	7-2
Timing Services	7-3
Video	7-3
Touch Screen Displays	7-4
Satellite Communication	7-4
xChat/IRC Communication	7-4
Aircraft Flight Tracking	7-5
Handling of Parameter Data	7-5
Recording of Data	7-5
CHAPTER 8	8-1
FACILITY INSTRUMENTATION	8-1
General Information	8-1
Standard Aircraft Systems	8-1
AIMMS-20	8-5
Applanix POS AV 610	8-8
Camera Systems	8-9
Dropsonde System	8-9

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

	Ch/Pg
CHAPTER 9	9-1
FLIGHT OPERATIONS	9-1
Flight Safety	9-1
Flight Management	9-6
 CHAPTER 10	 10-1
GROUND OPERATIONS	10-1
General Definition	10-1
Experiment Assembly and Checkout	10-1
Installation of Experiments	10-5
The Flight Period	10-8
Post Flight Activities	10-8
 APPENDIX A	 A-1
GUIDELINES FOR EXPERIMENTER RACK LOADING	A-1
Guidelines	A-1
Examples	A-4
 APPENDIX B	 B-1
HANDLING PROCEDURES	B-1
Scope	B-1
Purpose	B-1
Equipment Requirements	B-1
General Properties	B-1
Labeling	B-2
Pressure Relief	B-2
Hazards of Oxygen Deficiency	B-3
Hazards of Air-Freezing Cryogenes	B-3
Hazards of Carbon Dioxide Toxicity	B-4
Hazards of Oxygen Enrichment	B-4
Personal Protective Equipment	B-5
Immediate Treatment for Frostbite	B-6
Training Procedures and Safety Notes	B-6
 APPENDIX C	 C-1
OUTPUT PARAMETERS FROM THE DDS	C-1
Introduction	C-1
Data From Time Code Generator	C-1
Data From Honeywell Embedded GPS/INS MIL-STD-1553	C-2
Data From Radar Altimeter MIL-STD-1553	C-3
Data From Navigational Management System ARINC-429	C-4
Data From Air Data Computer ARINC-429	C-8
Data From Global Positioning System (GPS) ARINC-429	C-9
Data From Analog Sources and Computed Functions	C-10

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

APPENDIX D	D-1
IWG1 Packet Format	D-1

FIGURE LIST	Ch/Pg
Figure 1-1(a). General view and over-all dimensions of the DC-8.	1-2
Figure 1-1(b). General View and over-all dimensions of the DC-8.	1-3
Figure 3-1. Plan and side views of the aircraft, overview	3-2
Figure 3-1(a). Section A	3-3
Figure 3-1(b). Section B	3-4
Figure 3-1(c). Section C	3-5
Figure 3-1(d). Section D	3-6
Figure 3-2. Antenna locations and identification	3-7
Figure 3-2(a). Section A	3-8
Figure 3-2(b). Section B	3-9
Figure 3-3. Cross section of the fuselage	3-11
Figure 3-4. Cabin and cargo area access doors	3-12
Figure 3-5. Mission directors console	3-14
Figure 4-1. Viewport information.	4-2
Figure 4-2. Typical 62° viewports and nadir 5 and 9	4-6
Figure 4-3. Typical 8° viewport.	4-7
Figure 4-4. Typical zenith viewport.	4-8
Figure 4-5. Nadir no. 7 viewport (nadir no. 2 similar)	4-9
Figure 4-6(a). Optical viewport, frame and glass dimensions	4-10
Figure 4-6(b). Optical viewport, frame and glass dimensions	4-11
Figure 4-7. Standard unmodified passenger window	4-12
Figure 4-8. Radiometer on 8° insert panel	4-13
Figure 4-9. Optical characteristics of standard unmodified passenger windows	4-15
Figure 5-1(a). In-flight vibration spectra	5-7
Figure 5-1(b). In-flight vibration spectra	5-8
Figure 5-1(c). In-flight vibration spectra	5-9
Figure 5-2. Seat rails and clamps	5-10
Figure 5-3. Loads for a standard rack and connectors	5-12
Figure 5-4(a). Standard equipment racks — high rack	5-13
Figure 5-4(b). Standard equipment racks — high rack — dimensions	5-14
Figure 5-5(a). Standard equipment racks — medium rack	5-15
Figure 5-5(b). Standard equipment racks — medium rack — dimensions	5-16
Figure 5-6(a). Standard equipment racks — low rack	5-17
Figure 5-6(b). Standard equipment racks — low rack — dimensions	5-18
Figure 5-7. Installed equipment racks and viewports, cross section	5-20
Figure 5-8. Typical installation in equipment rack	5-21
Figure 5-9. Typical tray mounting configurations	5-23
Figure 5-10. Typical equipment mounting techniques — 62° Viewport	5-24
Figure 5-11. Typical equipment mounting techniques — low rack	5-25
Figure 5-12. Large experimenter equipment mounted on special framework	5-27
Figure 5-13. Large experimenter equipment mounted on special framework	5-28

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

	Ch/Pg
Figure 5-14(a). Typical wing tip pylon	5-29
Figure 5-14(b). Typical wing tip pylon	5-30
Figure 5-15. Wing tip connector panel in main cabin — station 670	5-31
Figure 6-1. Typical power and intercom station in cabin	6-3
Figure 6-2(a). Typical rack power panel	6-5
Figure 6-2(b). Rack power panel receptacles	6-6
Figure A-1(a). Low rack.....	A-2
Figure A-1(b). Medium rack.....	A-3
Figure A-1(c). High rack	A-3
Figure A-2. Standard face mounted equipment	A-4
Figure A-3 . Configuration examples and flow chart.	A-5

TABLE LIST

Table 1-1. Maximum aircraft range with normal fuel reserves	1-1
Table 1-2(a). Mission duration and initial altitude for 20,000 lb payload	1-4
Table 1-2(b). Mission duration and initial altitude for 30,000 lb payload	1-5
Table 1-3. True airspeed envelope	1-6
Table 1-4. DC-8 turn radius in NM, as a function of airspeed and bank angle.....	1-6
Table 2-1. Frequencies and interferences.....	2-2
Table 2-2. Radio systems specifications	2-3
Table 4-1. Location, aperture size, and load capacity of viewports.....	4-3
Table 4-2. Minimum thickness of window materials	4-14
Table 4-3. Inviscid flow over passenger ports, relative to fuselage floor plan	4-17
Table 4-5. Inviscid flow over nadir ports, relative to vertical centerline and fuselage floor planes	4-18
Table 4-4. Inviscid flow over 62j ports, relative to vertical centerline and fuselage floor planes	4-18
Table 5-1. Minimum crash load design criteria.....	5-3
Table 5-2. Minimum pressure vessel design criteria	5-4
Table 6-1. Commonly encountered wire/cable insulation materials	6-12
Table 8-1. Standard aircraft data systems available on CCTV and DDS data stream	8-2
Table A-1. Basic loading allowables for low, medium, and high racks.....	A-2
Table A-2. Allowable low and medium rack loading.....	A-6

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

This page intentionally left blank

**NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK**

INTRODUCTION

Since August 1987, NASA has been operating A Douglas DC-8-72 Aircraft (NASA 817) for research activities in earth, atmospheric, and space sciences. This aircraft, extensively modified as a flying laboratory, is based at Dryden Flight Research Center (DFRC), Edwards, California. It is operated for the benefit of researchers whose proposals have been previously approved by NASA Headquarters. Airborne laboratory flights may be operated out of DFRC or from deployment sites worldwide, according to the research requirements.

The DC-8 is a four-engine jet aircraft with a range in excess of 5,000 nmi (9,200 km), a ceiling of 41,000 ft (12,500 m), and an experiment payload of 30,000 lb (13,600 kg). Utilization is planned to be 350 to 500 flight hours per year. Special viewports, power systems, and instruments have been installed in the aircraft to support a wide range of research programs.

Airborne research missions for the DC-8 are planned, implemented, and managed by the Science Mission Directorate (Code PS) at DFRC. A designated mission manager is responsible for all phases of an assigned mission and is the official point of contact for experimenters as well as for ground support and flight operations groups. The mission manager leads a core team, specific to each mission, consisting of him/herself, an operations engineer, a project pilot, and the crew chief. This team makes all significant decisions regarding mission aircraft operations. The mission manager also functions as the onboard mission director during flight phases of the mission. The mission director coordinates and monitors science and operations activities on the aircraft during flights.

The purpose of this handbook is to acquaint prospective DC-8 researchers with the aircraft and its capabilities. The handbook also contains procedures for obtaining approval to fly experiments, outlines requirements for equipment design and installation, and identifies the personnel and facilities that are available at DFRC for supporting research activities in the DC-8 airborne laboratory. This handbook is managed and revised from time to time by the DFRC Science Mission Directorate. Therefore, before arranging for experiments it is advisable to review the web site listed below, then contact the DFRC Airborne Science Directorate or your assigned mission manager for a current issue.

For information about the overall DFRC Airborne Science Program, including aircraft schedules and Airborne Science flight request procedures, and for an electronic version of this and other experimenter handbooks, look on the World Wide Web at:

<http://www.nasa.gov/centers/dryden/aircraft/DC-8/index.html>.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

AC	alternating current
ADC	air data computer
ADF	automatic direction finder
AED	automated external defibrillator
APT	automatic picture transmission system
ASCII	text format
ATC	Air Traffic Control
BCP	best computed position
CCTV	closed circuit television
CDU	control display units
CONUS	contiguous United States
CPU	central processing unit
DAOF	Dryden Aircraft Operations Facility
DC	direct current
DCE	data communications equipment
DCP	Dryden Centerwide Procedure
DDS	Data Distribution System
DFRC	Dryden Flight Research Center
DME	distance measuring equipment
DTE	data terminal equipment
EIF	Experiment Integration Facility
EMI	electromagnetic interference
EPOS	emergency passenger oxygen system (or smoke hood)
FAA	Federal Aviation Administration
FMS	flight management system
GFI	ground fault interrupter
GMT	Greenwich Mean Time
GPS	Global Positioning System
GS	glideslope receiver
HF	high frequency
HP	horsepower
IDLH	immediately dangerous to life or health
ILS	instrument landing system
INS	inertial navigation system
IR	infrared
IRIG	Inter-Range Instrument Group
KTAS	knot, true airspeed
LOC	localizer receiver
MFD	multi-function display
MIL-STD	military standard
MS	military specifications
MSDS	Material Safety Data Sheet

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

NAS	National Aerospace Standard
NASA	National Aeronautics and Space Administration
NEMA	National Electrical Manufacturers Association
NM	nautical mile
NMS	navigational management system
NOAA	National Oceanic and Atmospheric Administration
NTSC	National Television Standards Committee
PARM ID	parameter identification code
PMS	Particle Measuring Systems
PVC	polyvinyl chloride
RF	radio frequency
RIB	Research Instrumentation Branch
SAT	static air temperature
SATCOM	satellite communications system
SLA	sealed lead acid
SVHS	super video home system
TACAN	tactical air navigation transmitter/receiver
TAS	true air speed
TAT	total air temperature
TCAS	traffic alert and collision avoidance system
TCG	time code generator
TLV	threshold limit value
UHF	ultra high frequency
UPS	uninterruptible power systems
UTC	Coordinated Universal Time
VDC	volts of direct current
VHF	very high frequency
VOR	VHF omnidirectional ranger
W	watts
WGS	World Geodetic System

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

This page intentionally left blank

**NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK**

CHAPTER 1

AIRBORNE PERFORMANCE

1. Basic Aircraft Performance

The NASA DC-8-72, serial no. 46082 (NASA 817), is similar in appearance and performance to other four-engine, standard-body jet transports, as shown in figure 1-1(a) and 1-1(b). The aircraft is powered by four CFM International, CFM56-2-C1, high bypass ratio turbofan engines developing a maximum thrust of 22,000 lb each.

Basic aircraft performance in standard atmospheric conditions is summarized in the following subsections. Adding external instrument pods or pylons that increase drag will reduce performance parameters correspondingly.

A. Range

Maximum aircraft range with normal fuel reserves, for several payload weights, is as follows:

Table 1-1. Maximum aircraft range with normal fuel reserves.


Payload ¹ , lb	Fuel wt, lb	Gross wt ² , lb	Range, nmi
20,000	160,000	334,000	5,700
30,000	150,000	334,000	5,400
40,000	140,000	334,000	5,000

¹Payload = Experimenters, crew, equipment, seats and baggage.

²Assumed empty weight = 150,000



Payload weights seldom exceed 30,000 lb (13,608 kg), so that a 5,400 nmi (10,000 km) range is usually available except as reduced by special requirements for altitude profiles, flight patterns over ground test sites, external experiments, or headwinds.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

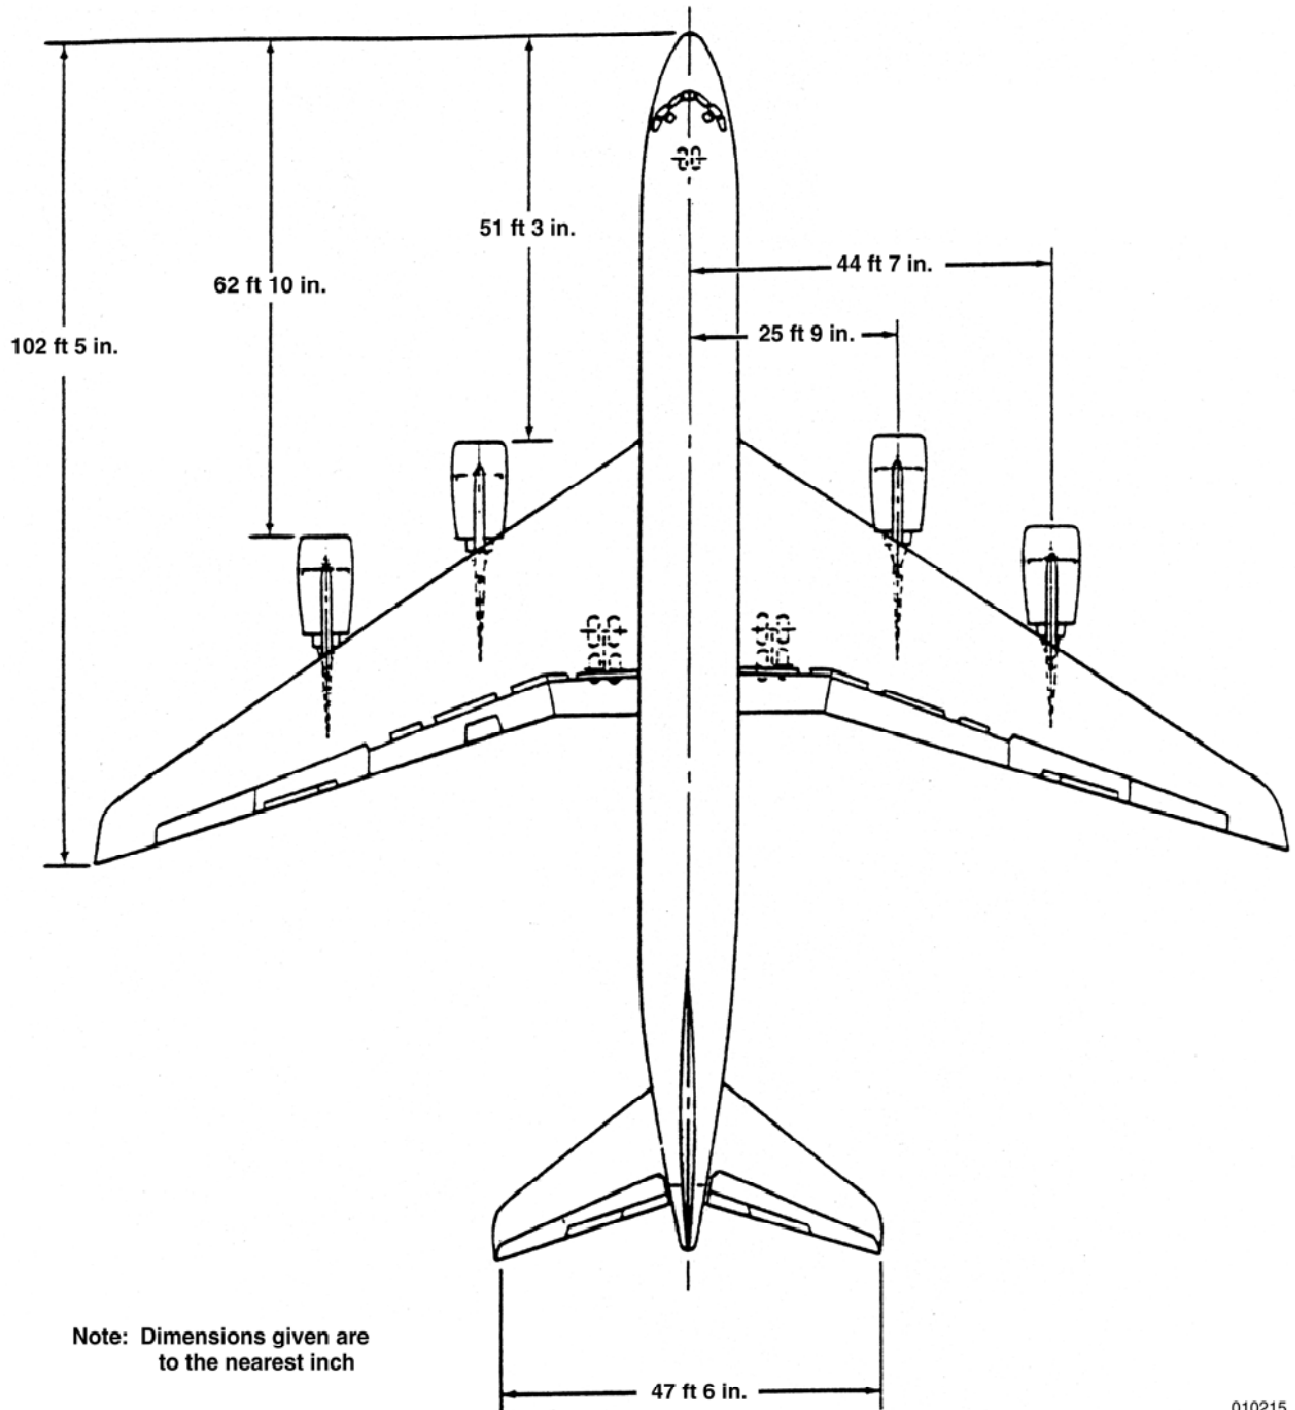

010215

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

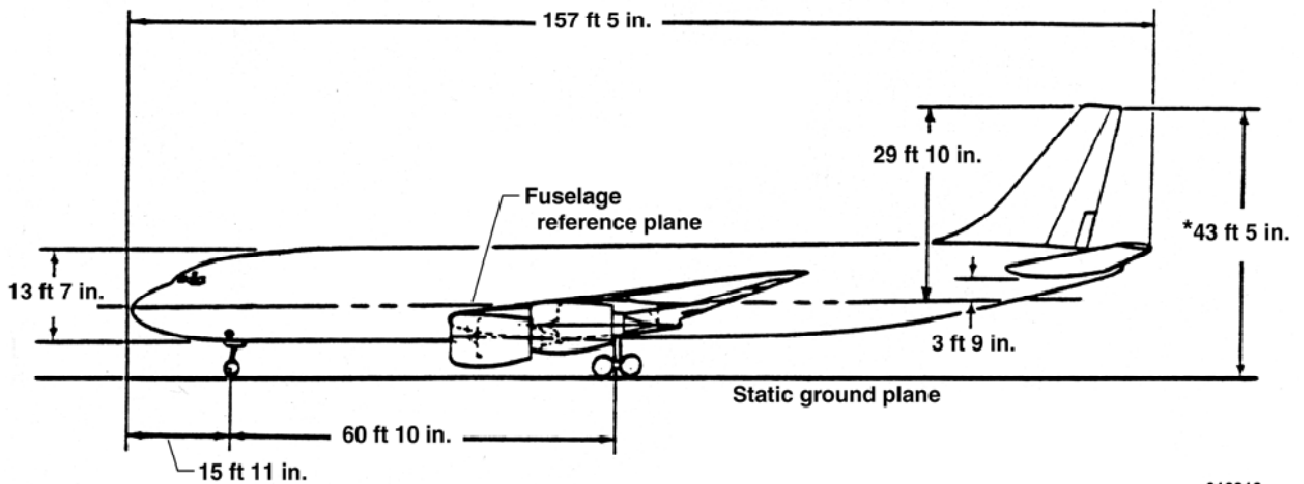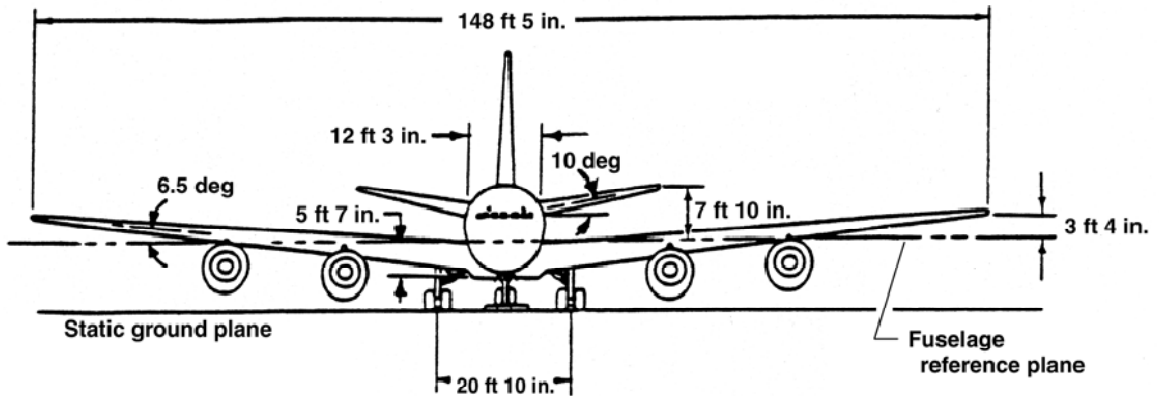

010216

Note: Dimensions given are to the nearest inch

* Based on: 13.9 in. rolling radius for the nose gear and 17.9 in. rolling radius for the main gear with the airplane at operator's weight empty

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

B. Runway Length

At standard sea level conditions, the DC-8-72 typically requires a jet transport-rated runway of 7,500 ft (2,286 m), when takeoff weight is 300,000 lb (136,079 kg). For a take-off weight of 325,000 lb (147,419 kg), the runway length must be at least 8,500 ft (2,591 m). With a maximum take-off weight of 350,000 lb (158,759 kg), the runway length must be 9,800 ft (2,987 m), minimum. The allowable aircraft take-off gross weight will be reduced by such limiting factors as runway length, weight-bearing capability, slope, height above sea level, as well as by air temperature, wind, and obstacles.

C. Time at Altitude

The time at a desired research altitude is dependent upon numerous factors. The table below gives times for various take-off weights and two sample payloads, as representative of aircraft performance. The one-hour allowance for time to climb and descend is an average, allowing variations in local air traffic control. The initial flight altitude will be reached in about 30 min. If a higher altitude is desired, a stepclimb can be achieved after aircraft weight has been reduced by fuel burn-off. Factors such as air temperature, aircraft configuration (probes, pylons, antennas etc.), and air traffic control will determine when the aircraft can climb to a higher altitude. Traditionally, an individual flight plan is developed for each case, to optimize total research requirements.

1) 20,000 lb (44,092 kg) Payload

Table 1-2(a). Mission duration and initial altitude for 20,000 lb payload.

Take-off Gross wt, lb	Fuel wt, kg	Initial Flight Altitude, ft	Climb & Descent	Time at Altitude
230,000	60	41,000	1 hr	3 hr 15 min
270,000	100	37,000	1 hr	7 hr 15 min
300,000	130	35,000	1 hr	9 hr 45 min
330,000	160*	35,000	1 hr	12 hr 0 min

*Maximum fuel

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

2) 30,000 lb (66,138 kg) Payload

Table 1-2(b). Mission duration and initial altitude for 30,000 lb payload.

Take-off Gross wt, lb	Fuel wt, kg	Initial Flight Altitude, ft	Climb & Descent	Time at Altitude
230,000	50	41,000	1 hr	2 hr 15 min
270,000	90	37,000	1 hr	6 hr 15 min
300,000	120	35,000	1 hr	8 hr 45 min
340,000	160*	33,000	1 hr	11 hr 0 min

*Maximum fuel

The maximum allowable flight duration is dependent on crew rest and aircraft weight limitations. Also, regulations require that sufficient fuel reserves be maintained at all times to assure adequate fuel for airport and air traffic delays plus reaching an alternate landing field. Fuel loads are subject to the discretion of the air commander. The need for this reserve and the distance between possible alternates in remote areas may combine to shorten the listed flight times. Exceptions to this reserve fuel requirement, in order to prolong experiment time, are not permitted.

D. Speed Envelope

At standard atmospheric temperature conditions, the true airspeed (KTAS) envelope for this aircraft is shown in table 1-3.

For preliminary planning, normal cruise speed at altitudes above 30,000 ft can be estimated at 450 KTAS.

E. Turn Radius

For certain types of experiments, it may be desirable to fly over several closely spaced checkpoints. However, the DC-8-72 is a relatively high-speed aircraft and its turning radius is quite large. Experimenters planning closely spaced checkpoints should consult with their mission manager regarding flight planning. The following table indicates radius of turn, with no wind, in nautical miles as a function of speed and bank angle. See table 1-4.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

Table 1-3. True airspeed envelope.

Altitude, ft	--- min	Knot, True Airspeed KTAS ¹ Long Range Cruise	--- max	Mach no. max
5,000	220	275 to 355	370	0.57
10,000	235	315 to 395	410	0.63
15,000	260	325 to 415	440	0.70
20,000	275	350 to 450	470	0.77
25,000	300	380 to 465	485	0.86
30,000	320	400 to 470	490	0.88
35,000	350	425 to 465	495	0.88
40,000	390	430 to 460	500	0.88
Dynamic Pressure (Qmax) = 572 lb/ft ²				

¹KTAS = (knots nautical miles per hour), true airspeed. One nautical mile = one arc-minute of latitude at the equator, or 6,076.12 ft (1,852 m).

Table 1-4. DC-8 turn radius in NM, as a function of airspeed and bank angle.

Bank Angle, deg	Airspeed, KTAS						
	300	325	350	375	400	425	450
5	15.0	17.6	20.5	23.5	26.7	30.2	33.8
10	7.5	8.8	10.2	11.7	13.3	15.0	16.8
15	4.9	5.8	6.7	7.7	8.7	9.9	11.0
20	3.6	4.2	4.9	5.6	6.4	7.3	8.1
25	2.8	3.3	3.8	4.4	5.0	5.7	6.3
30	2.3	2.7	3.1	3.6	4.1	4.6	5.1

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

2. Frequency and Duration of Flights

During the early stages of each mission, the mission manager develops mission specific operational guidelines affecting flight frequency and duration. These guidelines take into account the type of flights being proposed by the scientists, the proposed flight duration, the location, take-off times, and other mission specific conditions, and reflect the overall agreement of the aircraft flight crew, operations engineer, safety, mission management, and maintenance crew. The following general guidelines can be used for initial planning.

The duty day for DFRC personnel, including contractors, is limited to 14 hours maximum. The rest period between duty days must be a minimum of 12 hours. Given requirements for pre-flight and post-flight aircraft access, maximum flight duration is nominally 10 hours. Longer flights can be made but flight planning will be restricted and crew augmentation may be necessary.

A limit of 30-flight hours in a seven-day period and 100 hours per month is used for planning purposes. This has proven to be a practical limit for aircraft maintenance crews and, as experience has shown, for experimenters participating in the flights. However, given adequate crew rest and reasonable flight pacing, an absolute maximum of 40-flight hours in seven days can be allowed. Requests to exceed the 30-in-7 guideline will be evaluated on a case-by-case basis.

A typical operational schedule will consist of "fly days," "no-fly days," and "down days." Any day the aircraft flies, or the flight and maintenance crews arrive and complete preflight preparations and then the flight is cancelled, is considered a fly day. Generally, the number of consecutive fly days is limited to a maximum of six, to be followed by a no-fly day or a down day. Any day the aircraft is accessible to experimenters but does not fly is considered a no-fly day. Members of the DC-8 crew will be at the aircraft on these days. Fly days and no-fly days are duty days and subject to the limitations outlined above. A down day is a day off. The aircraft is not accessible to experimenters and aircraft crews will perform no mission duties. A down day must be planned at no greater than ten-day intervals. Scheduling will be flexible to accommodate real time conditions; however, down day planning must be done from the outset within the overall scheduling of the campaign.

3. Cabin Environment

The cabin, cargo areas, and electronics compartment are pressurized to an equivalent altitude of approximately 7,500 ft (2,286 m) when the airplane is at its 40,000 ft (12.2 km) cruise level. Humidity during flight nominally averages about ten percent; the temperature is held between 65 and 74 °F (18 and 24°C). Different sections of the interior can vary considerably in temperature, however, depending on the airflow patterns and the location of heat-producing equipment. Also depending

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

on operating location, low altitude operator may significantly increase cabin temperature and humidity.

4. Aircraft Stability

An SP-30AL analog autopilot system controls the heading and attitude of the aircraft. In smooth air, the autopilot limits deviations of pitch, yaw, and roll to within ± 1 deg.

Records of aircraft stability from the inertial navigation system (INS) can be made available to experimenters. In flight, the Data Distribution Systems (DDS) acquires the aircraft attitude and altitude, and then distributes this information to experimenters (see chapter 7).

5. Aircraft Attitude

A. In-flight

When cruising at a constant speed and altitude, the aircraft flies at a one to three deg nose-up attitude. A nominal value is 1.5 deg; however, the actual angle depends on a combination of gross weight (decreases as fuel is consumed), altitude, and true airspeed. A gross weight increase, altitude increase and an airspeed decrease results in an increased nose-up altitude.

B. Parked

When parked, the aircraft is at a 1.5 deg nose-down attitude. If necessary, during the installation and/or calibration of equipment, the aircraft can be leveled to zero deg by elevating the nose.

6. Worldwide Capability

NASA 817 is equipped and certified to meet airspace, communication, altimetry, and navigation performance specifications worldwide. All experiment payloads and aircraft configuration changes are reviewed to ensure that worldwide capability is not degraded.

A flight test to verify and re-certify aircraft performance will be accomplished when appropriate. If flight test determines the aircraft does not meet requirements throughout its normal operating envelope and the deficiencies cannot be corrected, limitations may be imposed. Such limitations may restrict the altitude, airspeed, or geographic regions within which the aircraft may operate.

**NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK**

CHAPTER 2

COMMUNICATION AND NAVIGATION

1. Basic Equipment and Operation

The NASA DC-8 is equipped with color weather radar and multiple communication and navigation systems. Communication equipment consists of: two high frequency (HF), very high frequency (VHF), and ultra high frequency (UHF) radios, one VHF-FM transceiver, and an ATT AirOne and Inmarsat Aero-H SATCOM telephone. Navigation aids include dual flight management systems (FMS), which include two 12-channel GPS receivers, two inertial navigation systems (INS), two VHF omnidirectional range (VOR) systems, two distance measuring equipment (DME) systems, a traffic alert and collision avoidance system (TCAS), 2 glideslope receivers, a tactical air navigation (TACAN) transmitter/receiver, and two automatic direction finders (ADF). Additional equipment, such as radar tracking beacons and GPS receivers, can be installed for experimenter support (see section 4).

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

A. Frequency and Interference

Frequency ranges of the navigation, radio, and radar units are listed below. Experimenters are cautioned to engineer their equipment to prevent spurious response at these frequencies, and to limit any output from their systems to 100 milliwatts (as in telemetry).

Table 2-1. Frequencies and interferences.

Equipment	Frequency	Receive	Transmit
Low Frequency ADF	190 to 1750 kHz	1	
HF Radio	2.0 to 30.0 MHz	1	1
Marker Beacon	75 MHz	1	
Localizer Receiver (LOC)	108 to 112 MHz	1	
VHF Omnidirectional Range (VOR)	108 to 118 MHz	1	
FM Radio	30 to 87.975 MHz	1	
VHF Radio	108 to 173.975 MHz	1	
Glideslope Receiver (GS)	329.3 to 335.0 MHz	1	
UHF Radio	225 to 400 MHz	1	
DME & Tactical Air Nav (TACAN)	1025 to 1150 MHz	1	
Air Traffic Control, transponder	1030 MHz 1090 MHz	1	1
Global Positioning System (GPS)	1575.42 (± 2.0) MHz	1	
DC-8 Radar Altimeter	4.2 to 4.37 GHz	1	
Experimenter Radar Altimeter	4.25 to 4.35 GHz	1	
Weather Radar (C-Band)	5400 (± 40) MHz	1	
Traffic Alert and Collision Avoidance System (TCAS)	1030 MHz 1090 MHz	1	1
Iridium Telephone	850 MHz 895 MHz	1	1
SATCOM Telephone	1530 to 1559 MHz 1626.5 to 1660.5 MHz	1	1
Storm Scope		1	

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

B. Radio System Specifications

Detailed specifications, for the radio equipment installed in the DC-8, are listed in the table below.

Table 2-2. Radio systems specifications.

Characteristic	HF Radio	VHF Radio	FM Radio	UHF Radio
Frequency Range	2.000 to 29.999 MHz	108.0 to 173.975 MHz	30.00 to 87.975 MHz	225.00 to 399.95 MHz
Number of Channels	28,000	2,160	2,320	7,000
Channel Spacing (Increments)	1.0 kHz	8.33 kHz	25 kHz	25 kHz
Power Output	AM: 125W* SSB: 400W PEP CW: 125W	AM: 25W*	AM: 25W*	AM: 30W*
Type of Emmission	USB: Compatible AM, (USB with carrier inserted) SSB: (with carrier suppressed, USB or LSB)	Amperage and frequency modulated; double sideband, full carrier		

*Carrier power

C. Location and Operation

The communications systems, both flight management systems, and the weather radar are set and controlled from the cockpit. The flight management system can be controlled from the navigator's console. The control display units (CDU) for the inertial navigation systems are also located at the navigator's console.

2. Navigation Accuracy

The following are general guidelines of the accuracy attainable with selected systems under average flight and weather conditions.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

A. Global Positioning System

The global positioning system provides the most accurate location and motion coordinates for the aircraft. Accuracy is as follows:

Horizontal Position	49 ft
Altitude	49 ft
Ground Speed	1.0 kn
Track Angle	0.5 deg
Vertical Velocity	0.1 kn
Horizontal Velocity	1.0 kn

B. Distance Measuring Equipment (DME)

Distance measuring equipment permits locating the aircraft within a two-nmi radius. DME measures slant range and is not accurate directly over the station.

C. Inertial Navigation System (INS)

The inertial navigation system permits locating the aircraft with an average position error of less than two nautical miles (3.7 km) per flight hour. The INS also provides displays of present position (latitude and longitude), wind speed and direction, ground speed and track, and time and distance to next waypoint. These displays are updated every 0.6 seconds.

D. Flight Management System (FMS)

The flight management system accepts primary position information from short and long-range navigation sensors. Inputs from the DME, VOR, TACAN, and GPS are utilized to determine the aircraft's position. In addition to the navigation inputs, the system also receives true airspeed and altitude information from the air data computer (ADC) and heading reference from the INS. The primary position data received from the sensor is filtered within the FMS to derive a "best computed position" (BCP). Using the BCP, the FMS navigates the aircraft along the programmed flight path.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

3. Navigation Planning

DFRC Flight Crew Branch navigators provide navigation planning and support to accommodate experimenters' requirements. A flight plan including positions, headings, airspeed, and altitude is developed for each segment of the flight. Additionally, a vector map of the route of flight, and when required, an altitude-profile, are provided.

4. Radar Tracking Beacons

Radar tracking of the aircraft by a ground station is sometimes needed for certain missions (such as operation near a sounding rocket range, or oceanographic measurements coordinated with a surface ship). Radar beacons to be placed on the aircraft must be supplied by the experimenter. Power supplies and controls for the transponder may be mounted on a standard equipment rack in the main cabin.

NOTE: Information and specifications defining radar beacons must be supplied in advance, to insure correct interface with aircraft power and fixtures.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

This page intentionally left blank.

**NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK**

CHAPTER 3

INTERIOR DIMENSIONS AND SUPPORT FACILITIES

1. General Information

The DC-8-72 is similar in size and basic furnishings to other four-engine, standard-body jet transport aircraft. Passenger seating, windows, lavatories, emergency oxygen supplies, and the general cabin environment conform to current commercial standards. Extensive modifications have been made to accommodate a wide variety of experiments; these will be described in this and subsequent chapters.

2. Cabin and Cargo Areas

Figures 3-1, 3-2, 3-3, and 3-4 give the general layout of the cabin, aircraft, and the cargo areas.

A. Figure 3-1

This figure illustrates a top and side view of the fuselage, and a plan view of the main cabin and cargo areas that identifies entrances, exits, housekeeping systems, the data system, and stations for the navigator and mission director. Optical viewports and electrical power outlets, for experimenters' use, are also identified at their approximate locations.

Positions within the aircraft are identified by station numbers (in inches) beginning with 0 at the nose and increasing to 1620 at the rear of the fuselage. The basic structural locators are the belt frames, 20 in. apart longitudinally, and running throughout the aircraft.

B. Figure 3-2

This figure identifies the antennas and their location. It also gives the frequency of each antenna.

NASA DC-8 AIRBORNE LABORATORY EXPERIMENTER HANDBOOK

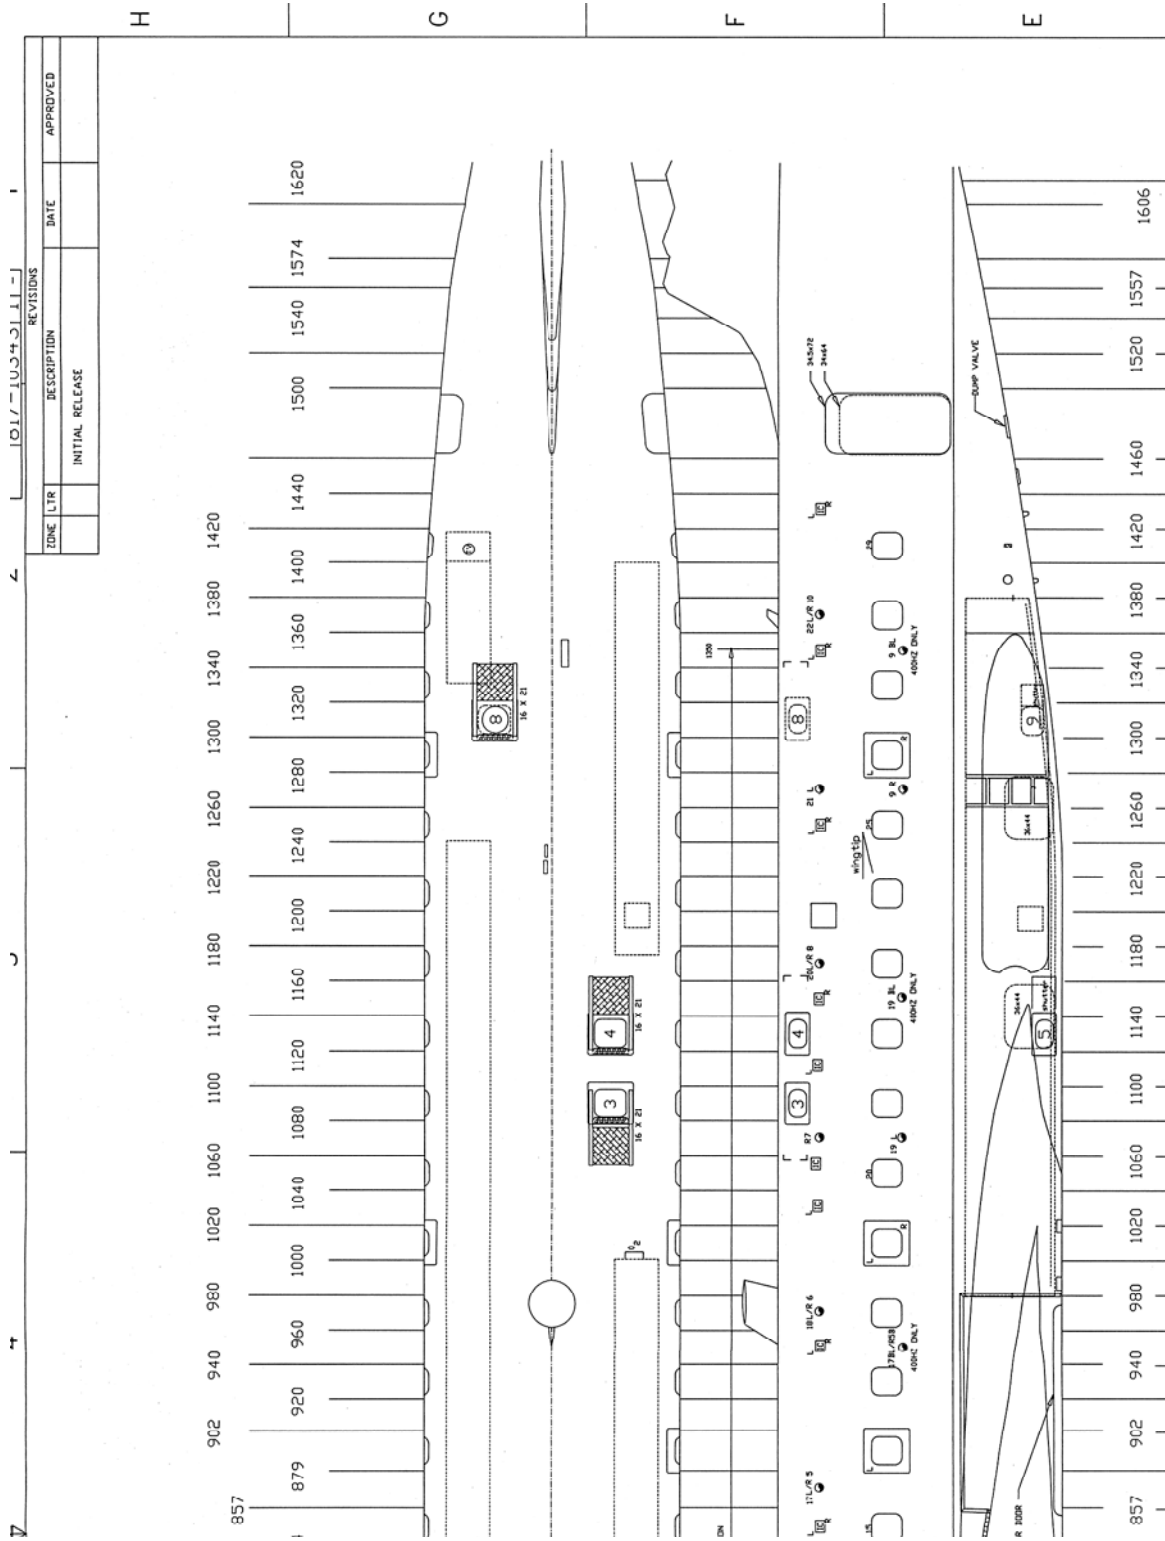


Figure 3-1(b). Section B.

NASA DC-8 AIRBORNE LABORATORY EXPERIMENTER HANDBOOK

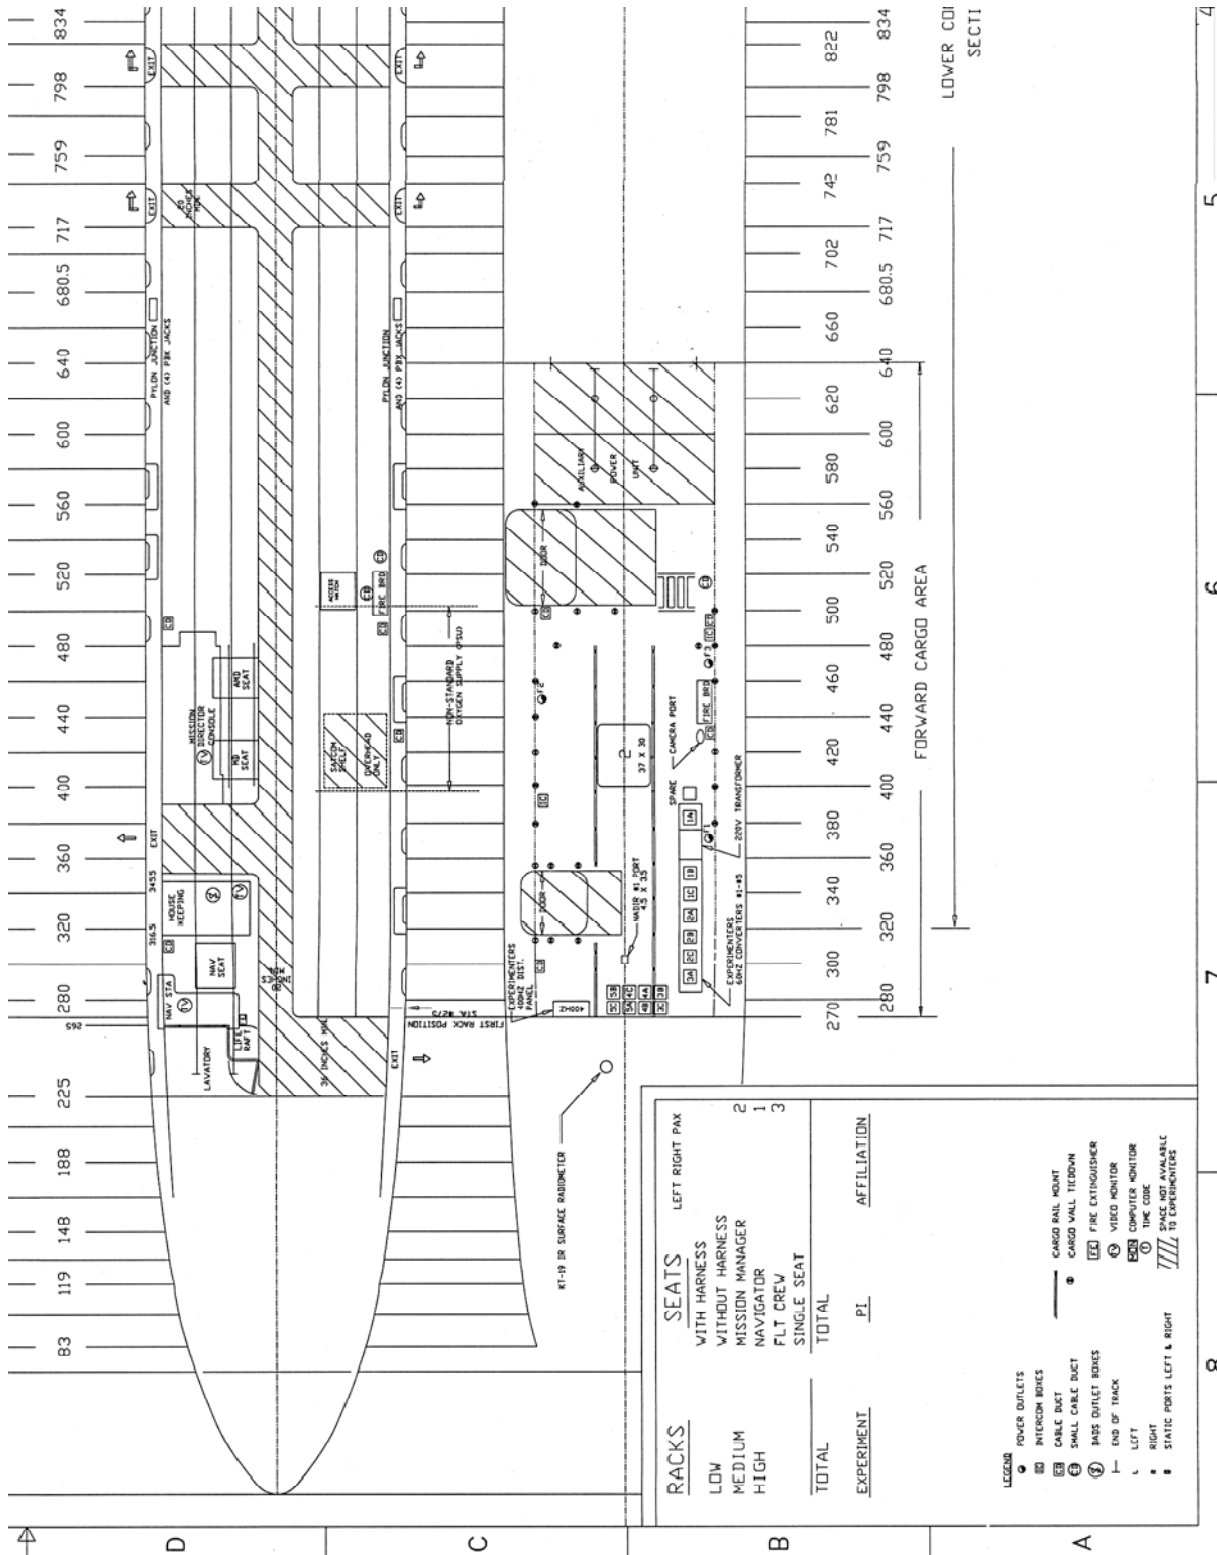


Figure 3-1(c). Section C.

NASA DC-8 AIRBORNE LABORATORY EXPERIMENTER HANDBOOK

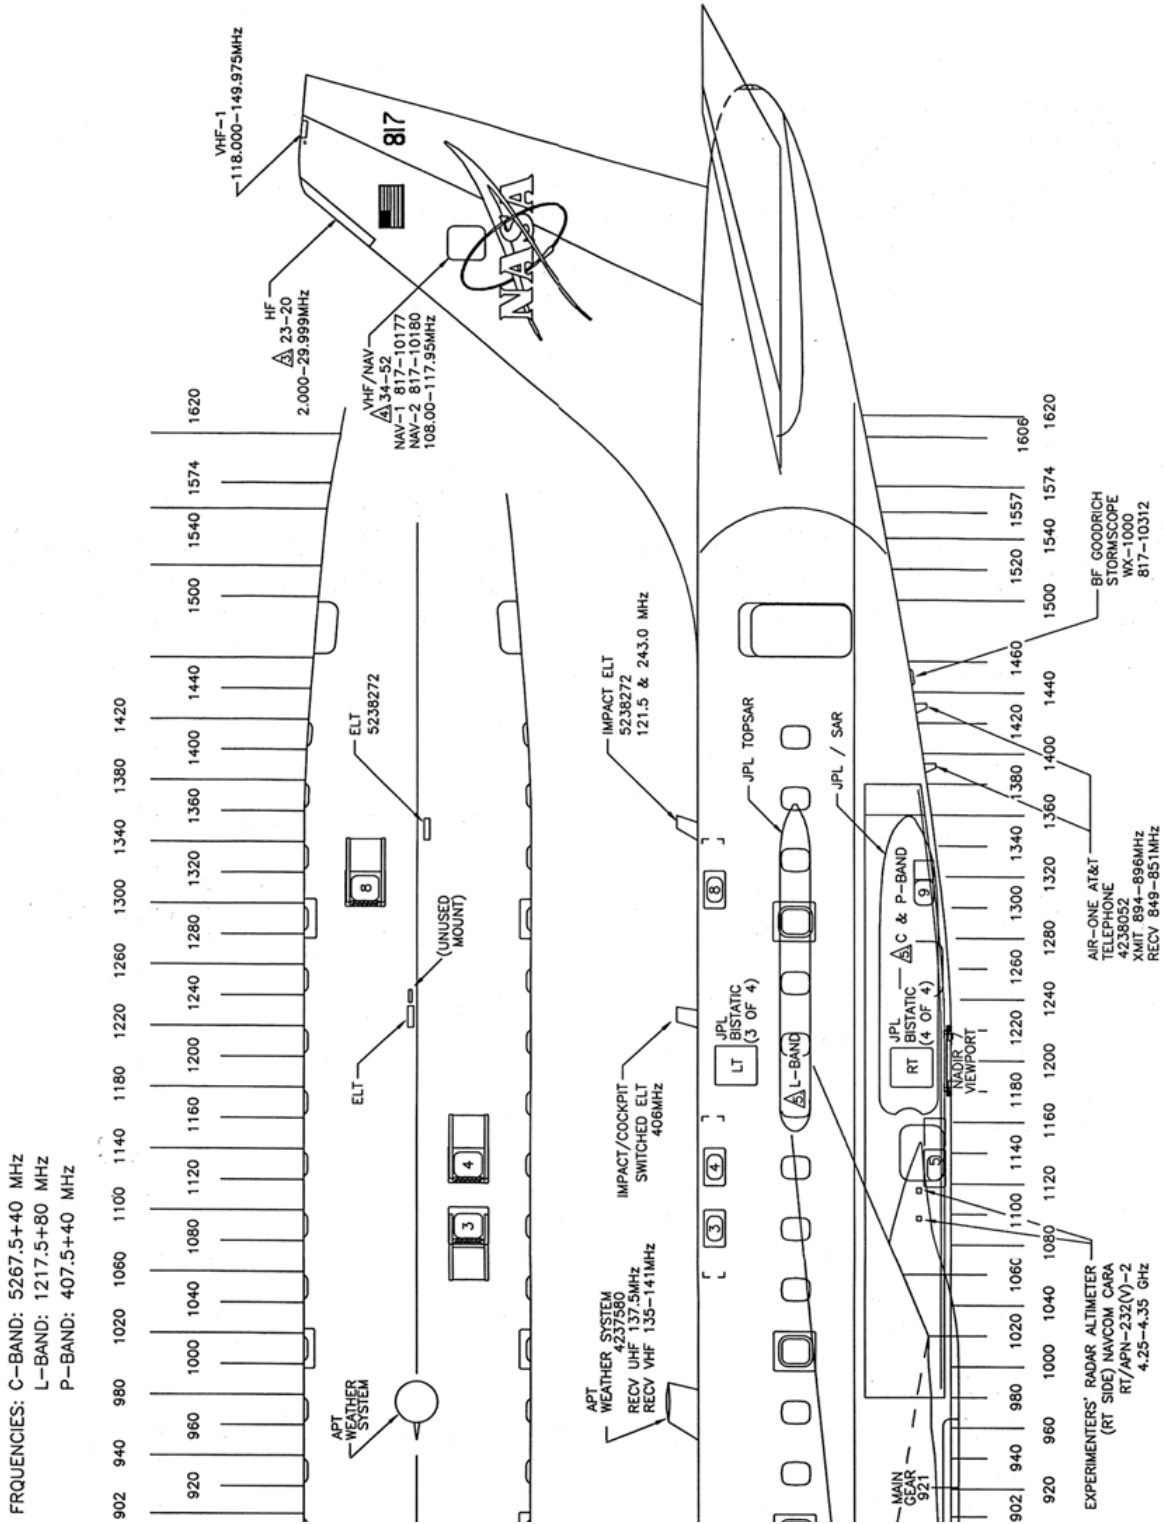


Figure 3-2(b). Section B.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

C. Figure 3-3

This figure illustrates a cross section of the fuselage, which is approximately symmetrical about the vertical centerline. The illustration summarizes the space available in the cabin and cargo areas. The main cabin is 127.5 in. wide at floor level, with approximately 82 in. of headroom. The cargo area has Brownline rails centered 33.6 in. apart at floor level, with approximately 52 in. of headroom.

Four Brownline seat-support tracks extending the length of the cabin provide the primary attachment points for equipment racks.

The floor, made of aluminum panels, can withstand a distributed download; however, fore, aft, and lateral forces must be sustained by the seat-support tracks.

D. Figure 3-4

This figure illustrates the external access doors in the main cabin and two cargo areas.


3. Fuselage Access

The main cabin has two passenger access doors, approximately 34 in. by 72 in., on the left hand side of the aircraft. There are two similar service doors, approximately 33 in. by 64 in., on the right hand side. Only the aircraft crew may operate these doors.

CAUTION: When any of these four doors are in the open position, a stairway or a safety net must be in place.

There are two cargo areas and each has two exterior access doors, three approximately 36 in. by 44 in. and one 54 in. by 63 in., on the right hand side of the aircraft (figure 3-4). In addition, there are two interior floor hatches that are approximately 18 in. by 20 in., granting in-flight access to both of the cargo areas (figure 3-1).


NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

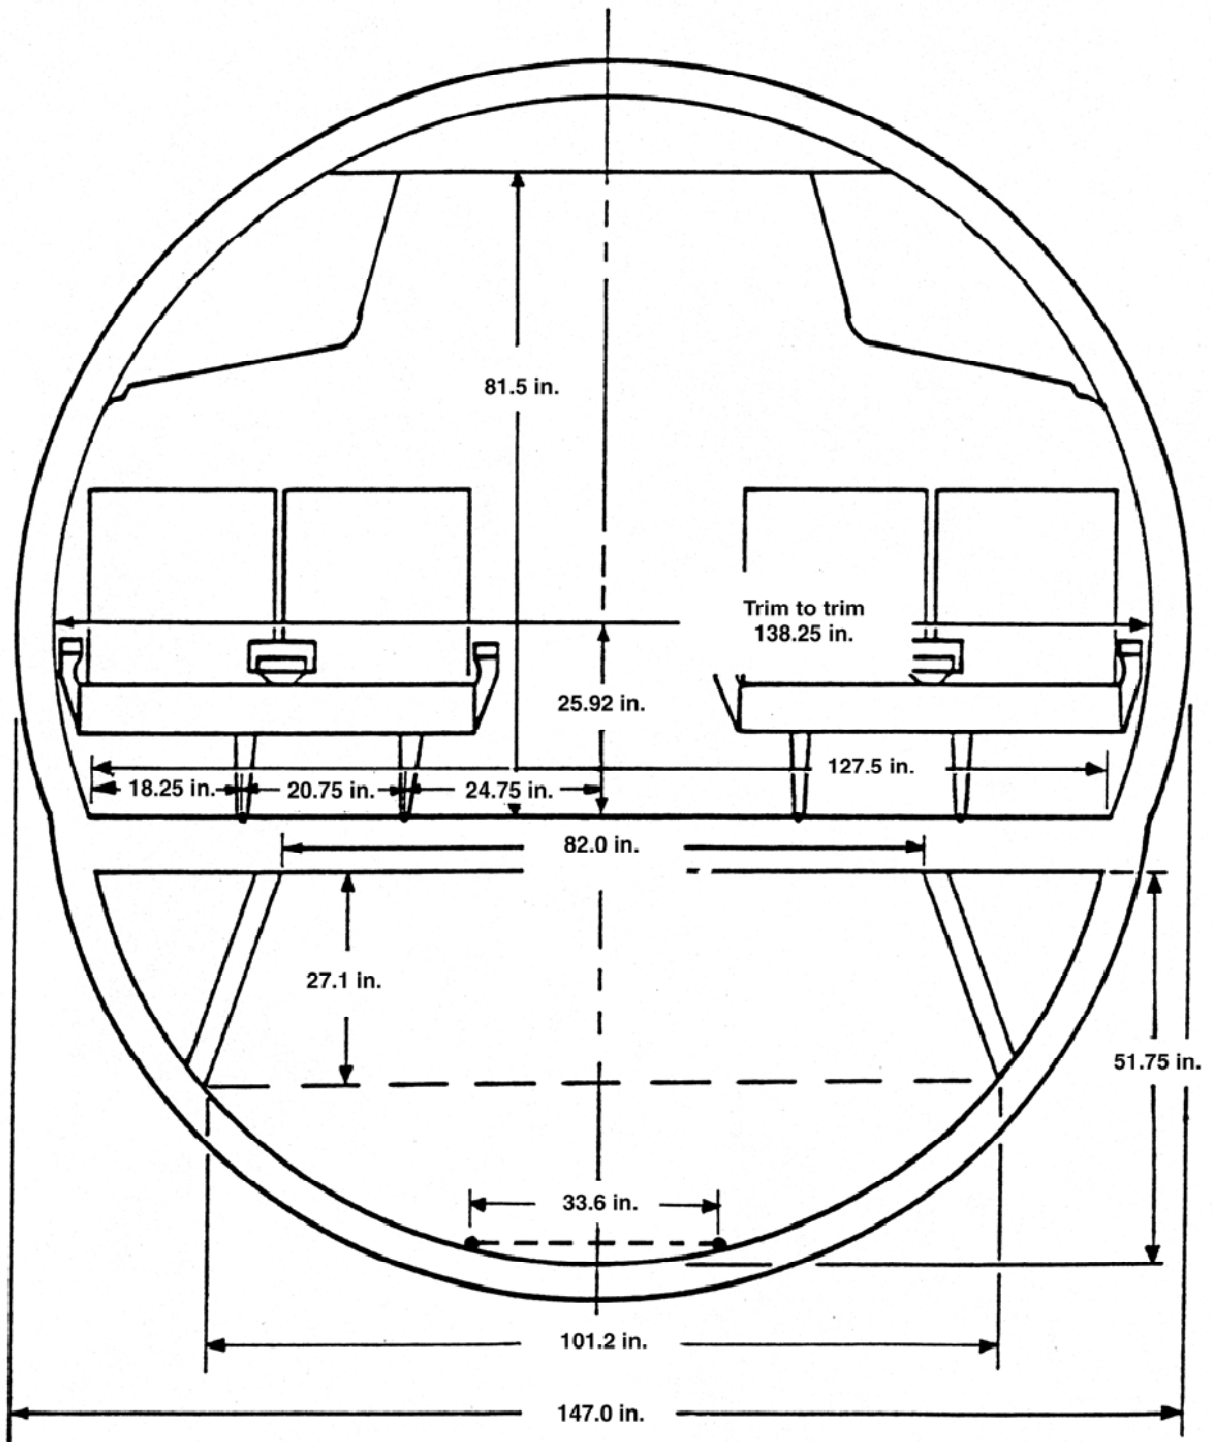


010219

Figure 3-3. Cross section of the fuselage.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

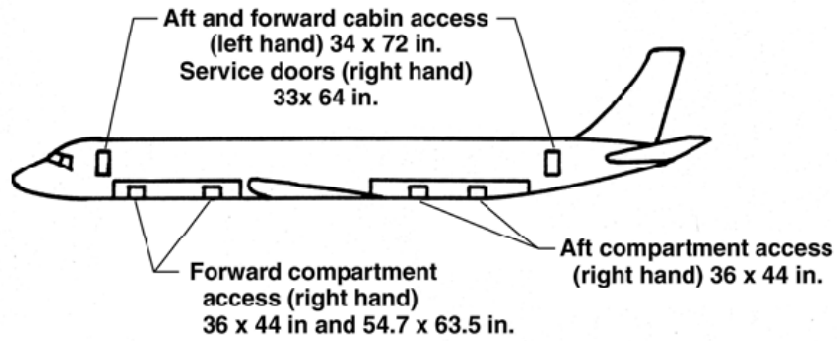

Compartment	Door	A Inches	B Inches
Forward	Fwd	20.0	24.7
	Aft	8.0	28.0
Aft	Fwd	20.0	24.7
	Aft	13.0	20.0

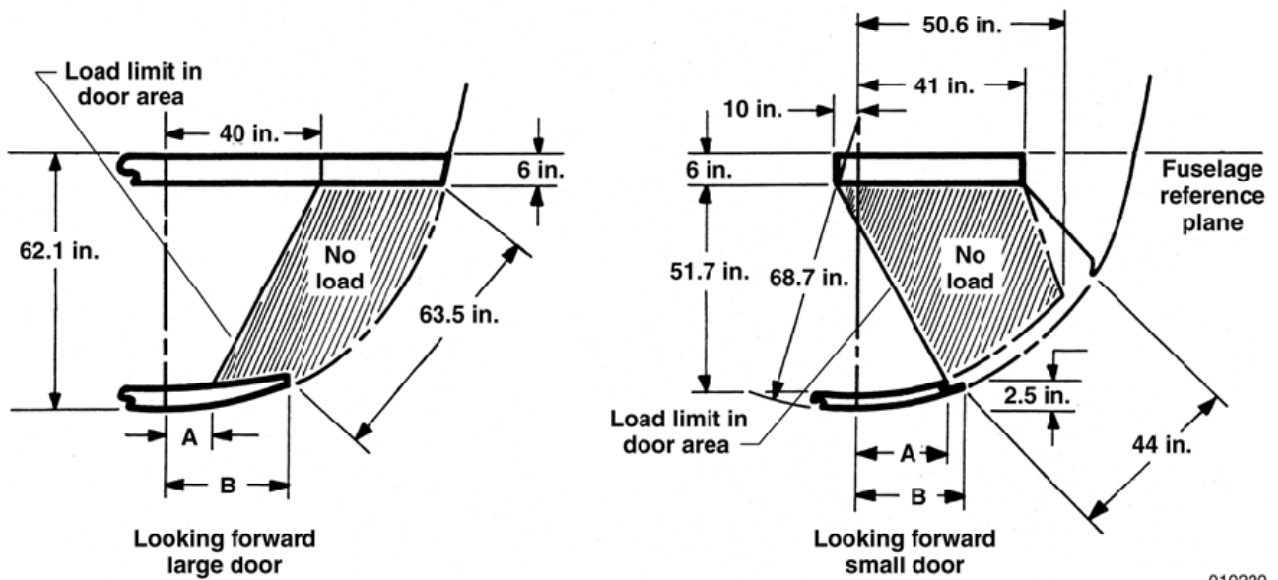

010220

Figure 3-4. Cabin and cargo area access doors.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

4. Support Facilities

Facilities lending support to the experimenters' operations are listed briefly below.

A. Mission Director Console

The mission director and his/her assistant are stationed at a command console in the forward part of the main cabin (figure 3-5). This console is the central control point for mission operations. From here the mission director can control the power to the experiments, nadir viewport shutters, and the cabin communications systems including the intercom system.

The console also has controls for several research support instruments, specifically, hygrometers that measure atmospheric dew point or frost point, and an IR surface temperature radiometer. Radio/telephone communication with the ground, ships, or with other aircraft can be conducted from this location. An eight-channel closed circuit PBX system switchboard with an interface to an Inmarsat Satellite Communication (SATCOM) telephone is also located at the console.

Remote display units at the mission director console include closed circuit television from the data system (DDS), video cameras, time code, NMS, radar and pressure altimeters, and cargo area temperatures.

B. Intercom System

The aircraft intercom system extends throughout the cabin and cargo areas, with outlets adjacent to wall power stations. The system has two channels of communication between the mission director and the experimenters. There are discrete channels to the cockpit and the navigator available to the mission director.

One of the channels is normally selected for general communication between the mission director and the experimenters. Upon request, experimenters needing a separate communications channel may use the second channel. Either or both channels will be recorded for an audio log using the aircraft's video recorders.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

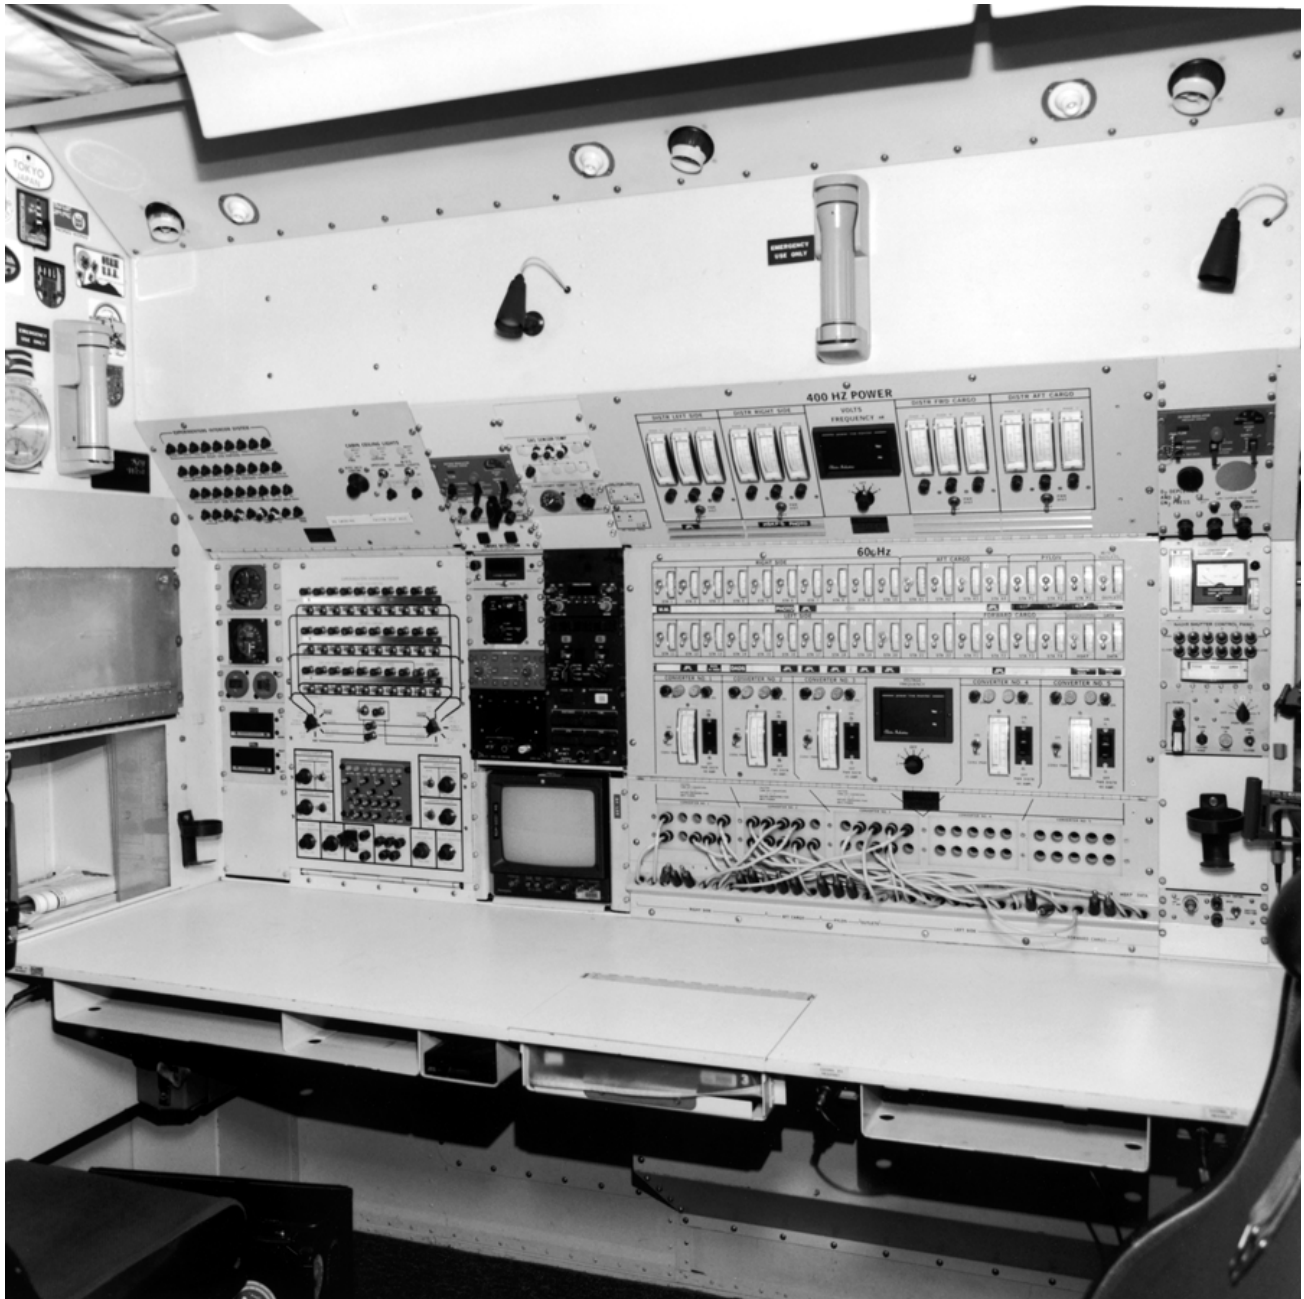


Figure 3-5. Mission director's console.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

C. Liquid Nitrogen

Three 35-liter dewars can be located in the main cabin, and arrangements can be made for local storage of smaller amounts of liquid nitrogen at the experimenter's station.

CAUTION: Personnel must wear personal protective gear during in-flight and ground handling of liquid nitrogen.

D. Dry Nitrogen Supply

Cylinders of dry nitrogen can be placed adjacent to the experiment or in the cargo areas. Advance notice to the mission manager is required for these types of facilities.

NOTE: Aluminum cylinders are preferred for all types of gases.

E. Liquid Helium

A container system is available to transport liquid helium to field bases for experimenter use. One 60-liter or two 30-liter dewars can be accommodated. Advance notice to the mission manager is required for use of this facility. Shipment of liquid helium to a remote site by commercial or military aircraft is very difficult, and requires special arrangements. Most commercial cargo flights will not carry liquid helium. The most careful consideration should be given to consumption rates, and arrangements made well in advance to ensure adequate re-supply deliveries to remote sites.

NOTE: In-flight handling of liquid helium is not permitted aboard the DC-8.

F. Passenger Seats

Conventional airline type seats are installed aboard the aircraft, each accommodating two people and equipped with safety belts and shoulder harnesses. These seats are placed facing forward at intervals between equipment racks throughout the cabin. The location of the seats is fully adjustable, in one-inch increments, throughout the length of the aircraft. The seats feature a non-removable center console/arm rest extending three inches forward of the edge of the seat cushion. The console has compartments containing life preservers and emergency passenger oxygen systems (EPOS), also known as smoke hoods. The console is 26 in. high. Keyboard drawers installed in experiment rack should be 27 in. above the floor to avoid obstruction. Experimenters may indicate their seating

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

preference, coordinating their seating with their equipment location. A limited number of individual swivel seats are also available for experimenters who require access to equipment from the side or aft of their seat while seated. All seats must face forward for take-offs and landings.

G. Wing Pylon Installation

A wing pylon can be installed near each wing tip to accommodate 100 lb (45 kg) of experimenter equipment. While each pylon is designed to hold two laser aerosol probes (such as PMS), other instruments of comparable size and weight could be used. Power, signal cables, and a dry nitrogen purge line are available at each pylon. Since pylon installations may require extensive structural and aerodynamic analysis to assure flight safety, it is mandatory that the mission manager be notified at least nine months prior to a proposed application.

H. SATCOM and AirOne Telephones

An Inmarsat Aero H Satellite Communications System (SATCOM) provides global in-flight voice and modem communications (excluding the arctic regions). Calls are placed or received by the mission director at the mission director console and then routed to one of eight handsets that can be located at experimenter stations in the cabin. Two SATCOM calls can be accommodated simultaneously. Data can be transmitted with prior arrangements.

The two-channel ATT AirOne telephone of the DC-8, provides air-to-ground communications within the forty-eight contiguous United States region only. This is a less expensive but more limited alternative to SATCOM. Experimenters must use a handset located at the mission director console to place calls using this telephone.

The cost of calls on both SATCOM and AirOne systems are charged to the appropriate mission sponsor as a mission peculiar cost.

A VHF radio for mission scientist communications is available with prior arrangements. VHF radio transceivers operate only in line of sight and are unsuitable for over-the-horizon communication.

**NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK**

CHAPTER 4

FUSELAGE VIEWPORTS AND WINDOWS

1. General Information


An assortment of special viewports, accommodating up to 16 in. (0.41 m) diameter clear aperture windows, have been installed in the fuselage at various elevations and longitudinal locations. In addition, several of the standard passenger windows have been modified for special viewport uses (see chapter 3, figure 3-1). These special viewports and windows can be used for optical viewing; therefore, they have been equipped with defogging systems and appropriate safety features that permit the use of various transparent materials. The ports will also accommodate aluminum plates that can be used to support external gas sample probes, small antennas, radiometers, and other lightweight units that require fuselage penetration.

Unmodified passenger windows are on occasion used for optical viewing when surface and transmission quality are acceptable. For example, film and video cameras can document surface or cloud information to support other instruments.

2. General Description

Viewports and windows in the cabin area are identified by their angle of elevation within the fuselage. There is one zenith (90°) viewport on the aircraft centerline, four 62° upward-looking viewports (three left and one right hand side), and ten passenger windows modified to be 8° viewports (six left and four right hand side). In addition, there are four nadir ports (downward looking). They are located in the fore and aft cargo compartments with one port in each cargo compartment on the aircraft centerline, and two smaller ports (both left and right hand side) in the aft cargo compartment positioned directly beneath 62° overhead viewports. There are hatches in the cabin floor aligned with these upper and lower ports so that an instrument may view up and down the vertical axis simultaneously. The zenith, 62° , and nadir viewports are equipped with external sliding shutters that can be opened and closed in flight. These shutters are to protect the external surfaces of the optical windows on the ground, and during takeoff and landing.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

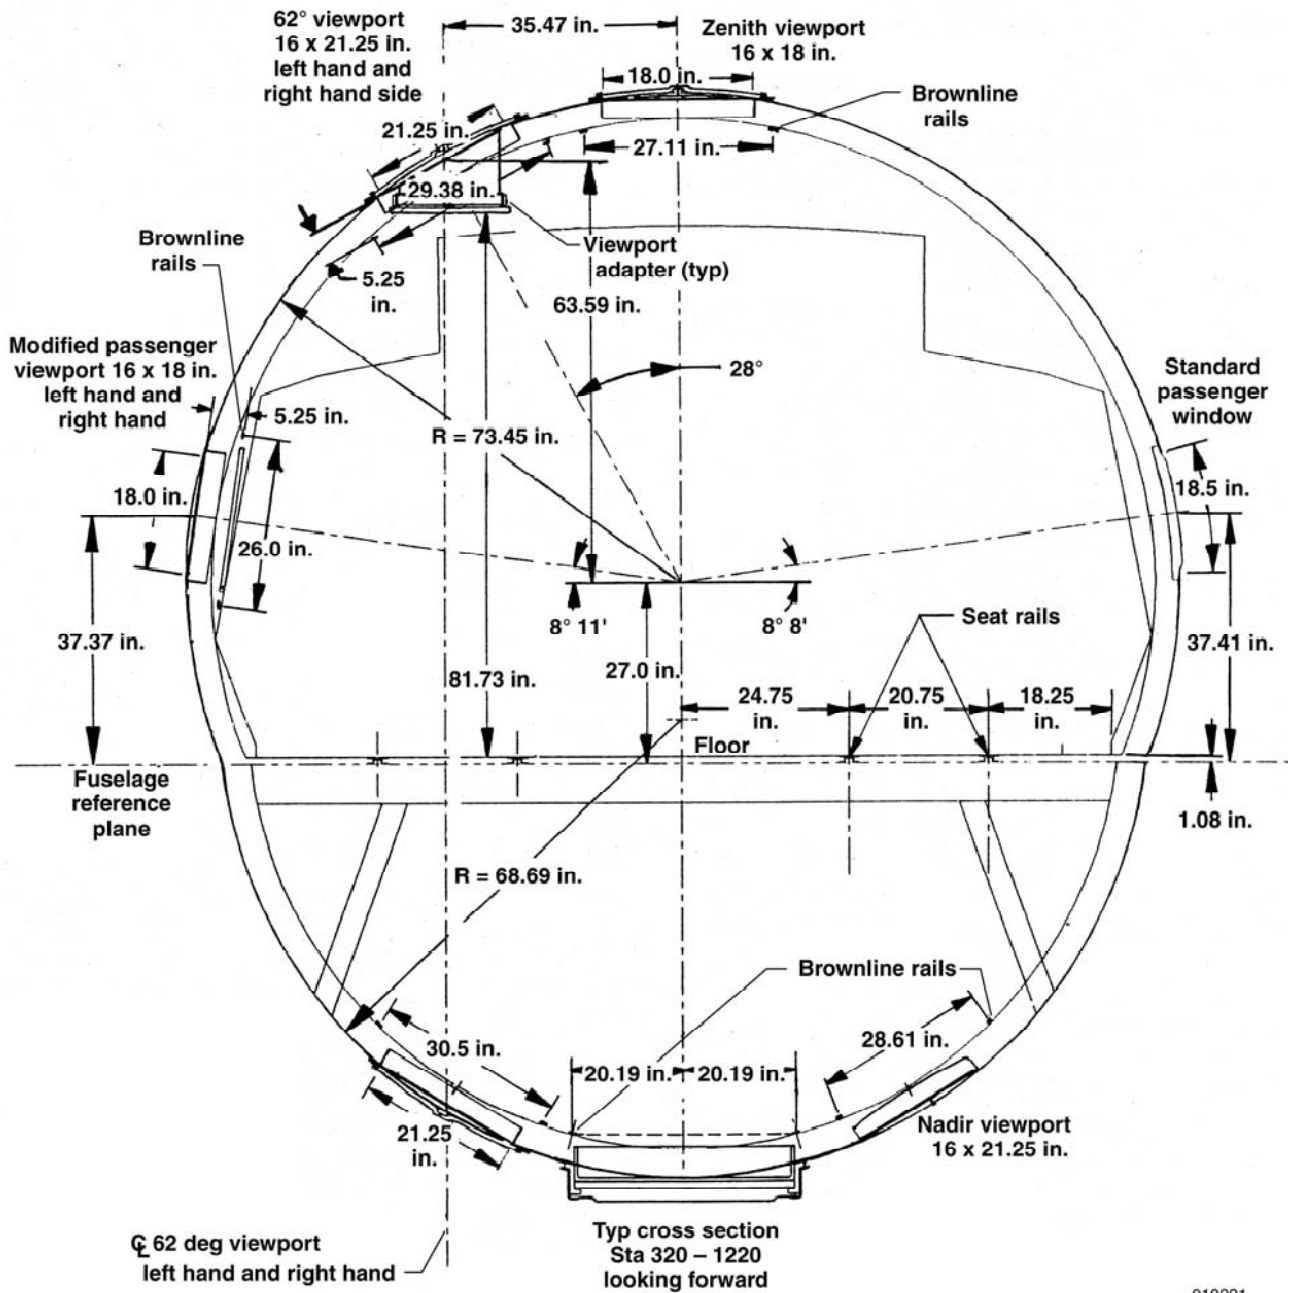

010221

Figure 4-1(a). Viewport information.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

Table 4-1. Location, aperture size, and load capacity of viewports.

Viewport	Approximate Location on Centerline	Size¹, in.	Number of Hardpoints²	See Figure:	Capacity³ lb @ in.
Zenith, Nadir, and 62 ° Ports:					
Zenith no. 1	Sta. 330 C/L	16 x 18.0	4	4-4	100 @ 10
Nadir no. 2	Sta. 420 C/L	37.25 x 30.0	6	4-5	250 @ 24
Nadir no. 7	Sta. 1200 C/L	37.25 x 30.0	6	4-5	250 @ 24
62 ° no. 1	Sta. 470 LH	16 x 21.25	4	4-2	100 @ 10
62 ° no. 3	Sta. 1090 LH	16 x 21.25	4	4-2	100 @ 10
62 ° no. 4	Sta. 1130 LH	16 x 21.25	4	4-2	100 @ 10
Nadir no. 5	Sta. 1130 LH	16 x 21.25	4	4-2	150 @ 15
62 ° no. 8	Sta. 1310 RH	16 x 21.25	4	4-2	100 @ 10
Nadir no. 9	Sta. 1310 RH	16 x 21.25	4	4-2	150 @ 15
Camera Ports:					
Nadir no. 1	Sta. 300 C/L	5 x 3	0	-	-
45 °	Sta. 330 LH	3 dia.	0	-	-
Modified 8 deg Passenger Window Ports:					
8 °	Sta. 330 LH	16 x 18	4	4-3	100 @ 10
8 °	Sta. 450 LH	16 x 18	4	4-3	100 @ 10
8 °	Sta. 530 RH	16 x 18	4	4-3	100 @ 10
8 °	Sta. 570 L&R	16 x 18	4	4-3	100 @ 10
8 °	Sta. 890 LH	16 x 18	4	4-3	100 @ 10
8 °	Sta. 1010 L&R	16 x 18	4	4-3	100 @ 10
8 °	Sta. 1290 L&R	16 x 18	4	4-3	100 @ 10

¹. Longitudinal (fore/aft) dimension appears first.

². Minimum number required for experiment.

³. Total, perpendicular to the plane of the hardpoints.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

3. Configuration Details

The location, aperture size, and load capacity of the viewports are given in figure 4-1 and table 4-1, while the detailed dimensions of frames and the immediate surroundings are given in figures 4-2, 4-3, 4-4, 4-5, and 4-6.

Figure 4-6(a) and (b) give the specifications of the viewports, size of the glass (and other selected materials), and the corresponding inner frame and the seal arrangements. Figure 4-7 gives the size and panel thickness of the standard passenger windows.

A variety of techniques are available for mounting optical windows in the fuselage viewports. Two representative samples are shown in figure 4-6(a) and 4-6(b). Figure 4-6(a) illustrates a 7.0-in. (17.8 cm) diameter window installed in an 8-deg (modified passenger) viewport, while figure 4-6(b) illustrates a 16-in. (40.6 cm) diameter window installed in a 62° viewport. In each example, the bare glass (or optical material) is surrounded by a cushion of silicon rubber gaskets, and then by a metal casing ring or plate, which protects the window during handling. This casing also allows the window to be mounted to an appropriate adapter, which in turn fits the viewport of the aircraft.

All optical viewports have internal sliding safety shields, to provide pressure safety and to protect the inner surfaces of the optical windows. Normally, the shields are closed when the viewport is not being used and during takeoffs and landings. Experiment installations should be designed to clear the safety shields. The shields may be refitted to accommodate an experiment, if justified by special requirements. Advance request of at least three months is required, to allow for approval, design, and fabrication.

4. Special Inserts

A special adapter is provided for 62° and nadir viewports, to position the optical window parallel to the cabin floor and permit viewing normal to the window surface (see figure 4-2). At any viewport, an approved metal plate sized to frame dimensions, may be used to mount an instrument or antenna (see figure 4-8). The load that these inserts can support without attachment to window hardpoints is limited. Each installation is considered individually and must be discussed with the DC-8 mission manager during the preliminary planning. Correspondingly, when hardpoints are used to support equipment that extends through the metal viewport insert (such as a blade antenna), the unique loading and sealing requirements must be treated as a special case.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

5. **Optical Windows**

Numerous experimenters on the DC-8 have utilized optical (quality) windows. There is a limited stock of these windows, in various materials, held in secured storage. DFRC maintains a program of pressure/thermal testing and refurbishment, to meet aircraft safety requirements. Each optical window (or spare), from whatever source that will fly on the DC-8, must be inspected, tested, and approved as airworthy at DFRC test facilities prior to installation. Optical data files are maintained for these windows; the data includes transmittance, reflectance, flatness, and condition of surface or coating.

If an appropriate window is not available from stock, the experimenter must provide one. Either DFRC or the experimenter may supply the frames and the port inserts to accommodate the window materials.

Adapter plates must be used for all circular optical materials in order to adapt them to the standard rectangular shape of the aircraft window.

Special window requirements should be requested as early as possible, to allow for design, fabrication, and testing. Lead time to acquire finished optical materials can be six months or more, depending on composition and size.

A. Window Materials


Stock full-aperture, 16 in. (40.6 cm) diameter, window materials include borosilicate crown glass (BK-7), and UV grade fused silica. There are also a variety of other optical materials, all less than full aperture in size, such as high-density polyethylene, IrTran, germanium, and Pyrex.

As a guide to the design of special-purpose windows, table 4-2 lists representative materials, sizes, and minimum allowable thickness. Note that circular shapes are strongly preferred due to lower stress levels. All edges of glass-type materials must be chamfered (figure 4-6) and scratches, digs, or un-smoothed edge chips may disqualify a window for use. It is mandatory that any window material be isolated from metal inserts or frames by silicone rubber gaskets (grade 40), with sufficient tolerance to prevent strain from thermal and mechanical effects. The optical characteristics of the standard unmodified passenger windows (figure 4-7) are given in figure 4-9.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

B. Environmental Testing Of Optical Windows


Each window assembly, complete with frame and gaskets, is tested at DFRC prior to installation aboard the aircraft. To allow adequate time for testing, window parts must be at DFRC a minimum of four weeks prior to the scheduled installation. Each window must be marked to identify the cabin side before tests begin.

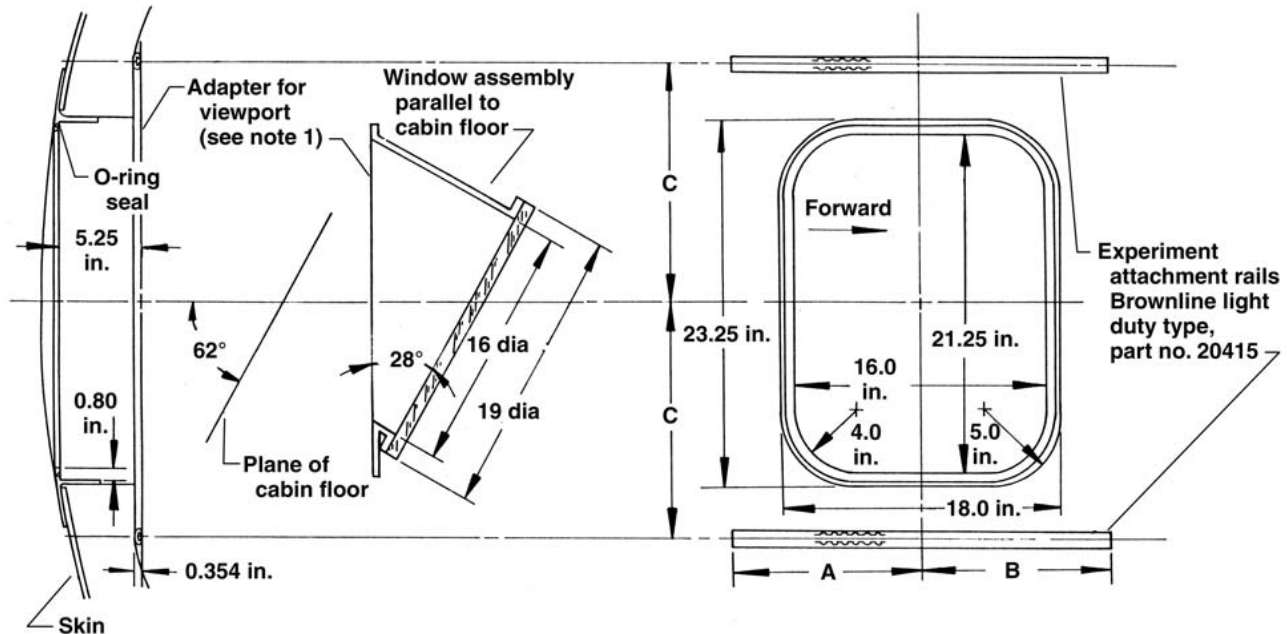

Notes:

1. Cylindrical adapter inserted into the viewport to install a 16-inch window parallel to the cabin floor.
2. Nadir number 9 is located in the conical tail section. Therefore, the window surface is inclined 5-degrees relative to the floor plane.


Viewport	A	B	C
62°, no. 1, 8	24	24	14 11/16
62°, no. 3,4	12	12	14 11/16
Nadir no. 5	37	51	15 1/4
Nadir no. 9	28	24	14 5/16



010222

Figure 4-2. Typical 62 ° viewports and nadir 5 and 9.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

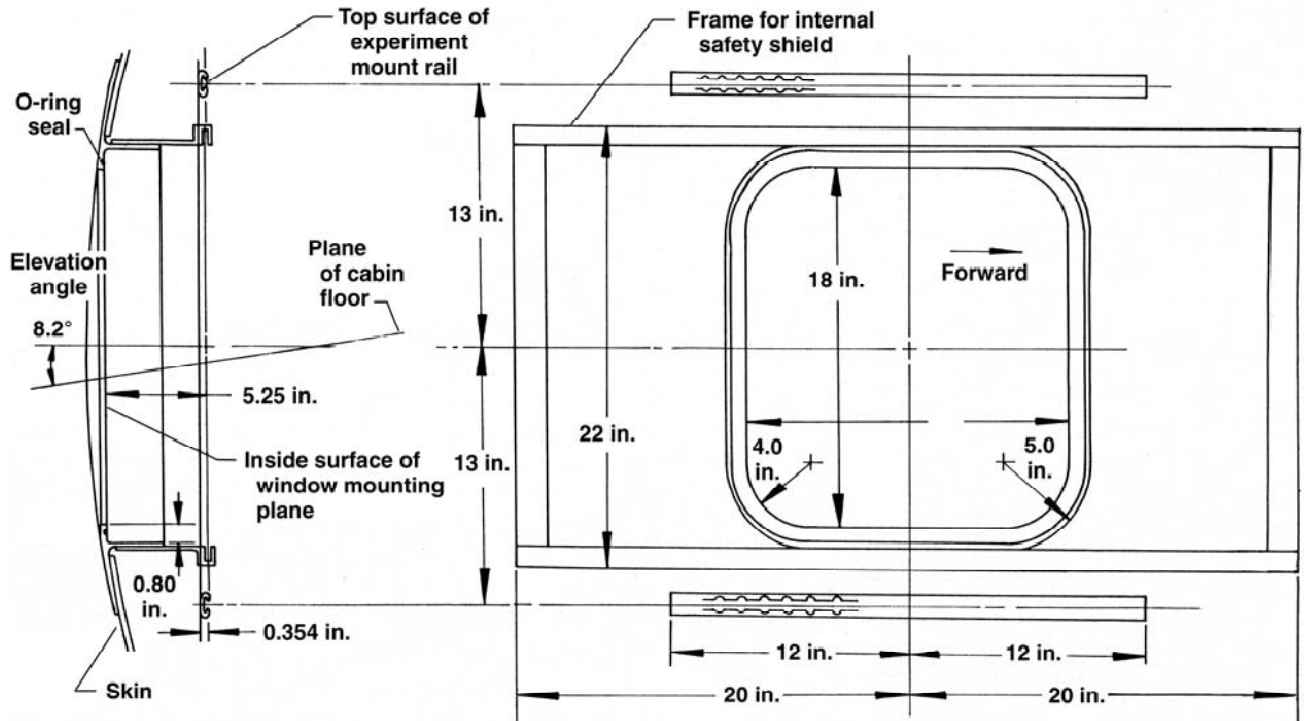

010223

Figure 4-3. Typical 8° viewport.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK


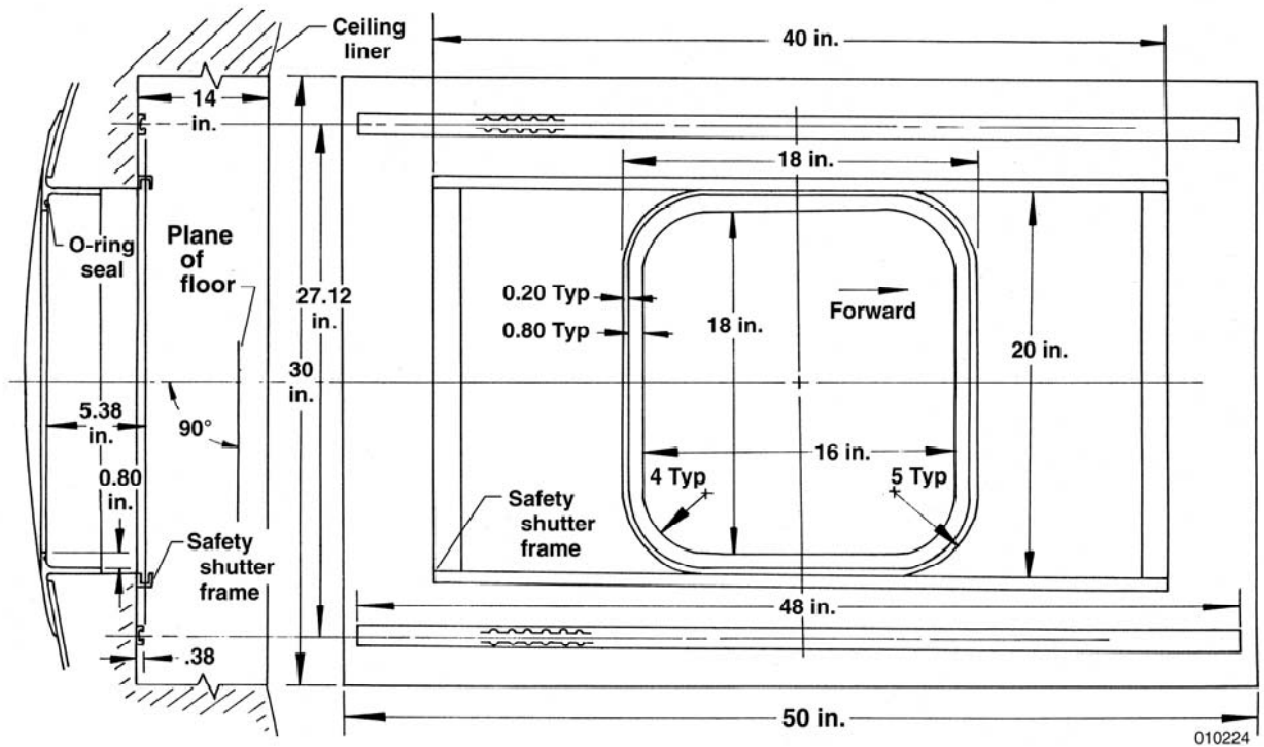


Figure 4-4. Typical zenith viewport.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

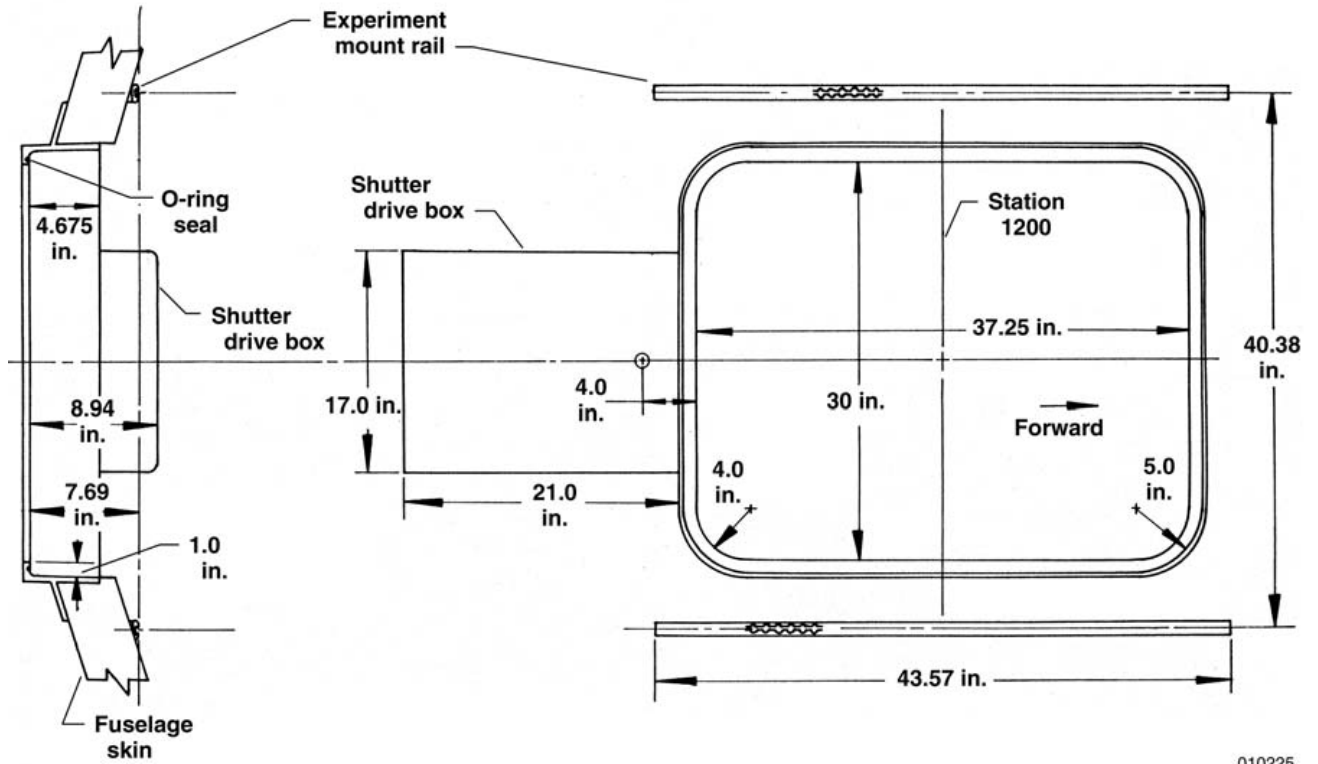

010225

Figure 4-5. Nadir no. 7 viewport (nadir no. 2 similar).

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK


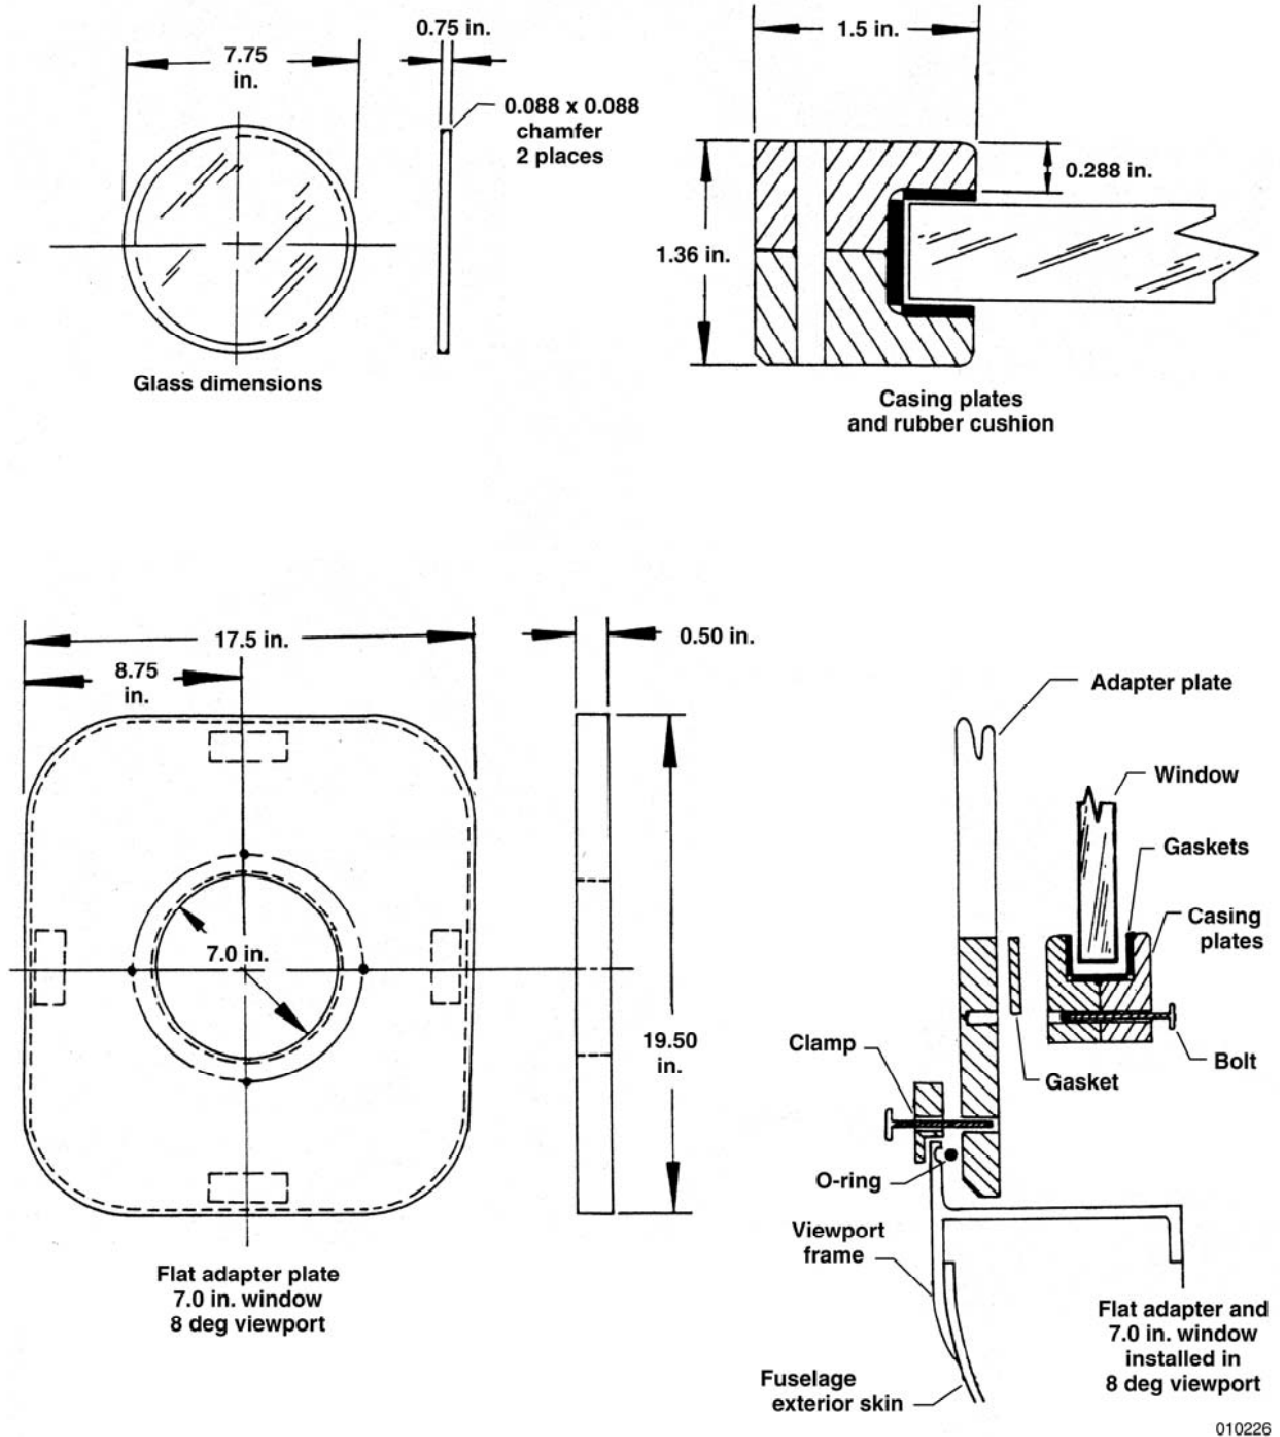


Figure 4-6(a). Optical viewport, frame and glass dimensions.


NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

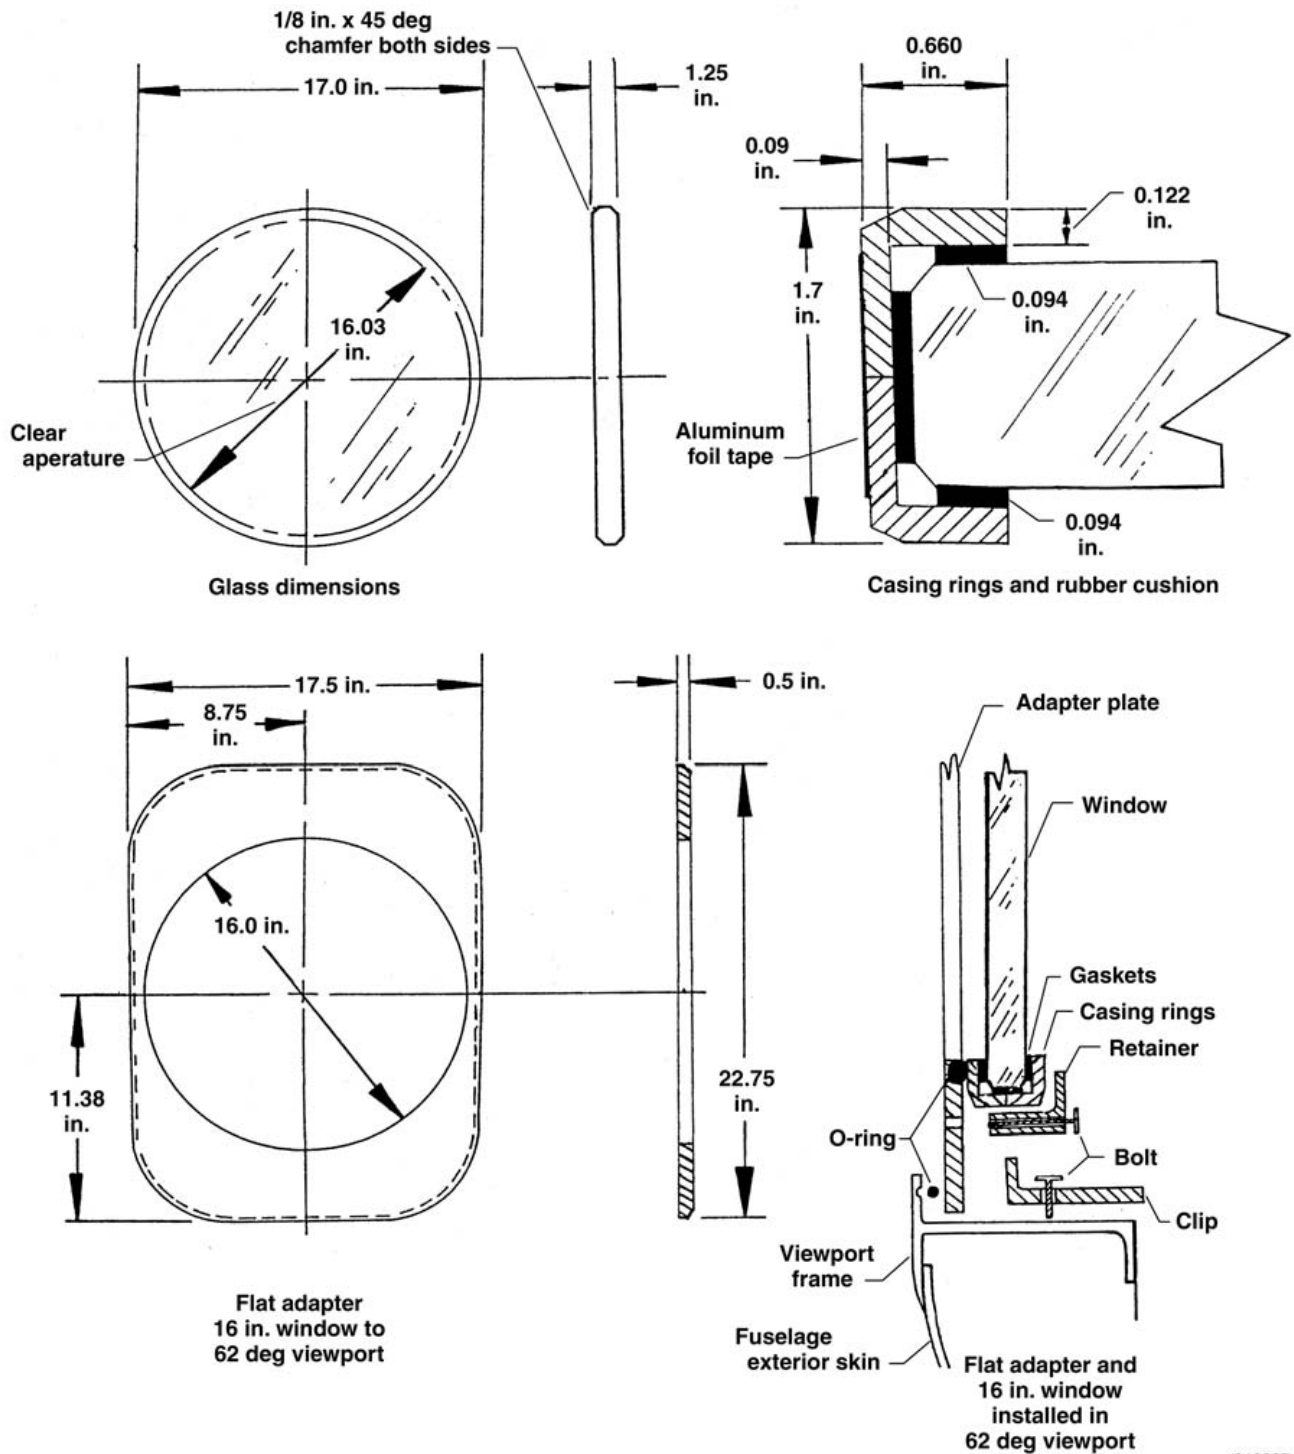

010227

Figure 4-6(b). Optical viewport, frame and glass dimensions.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

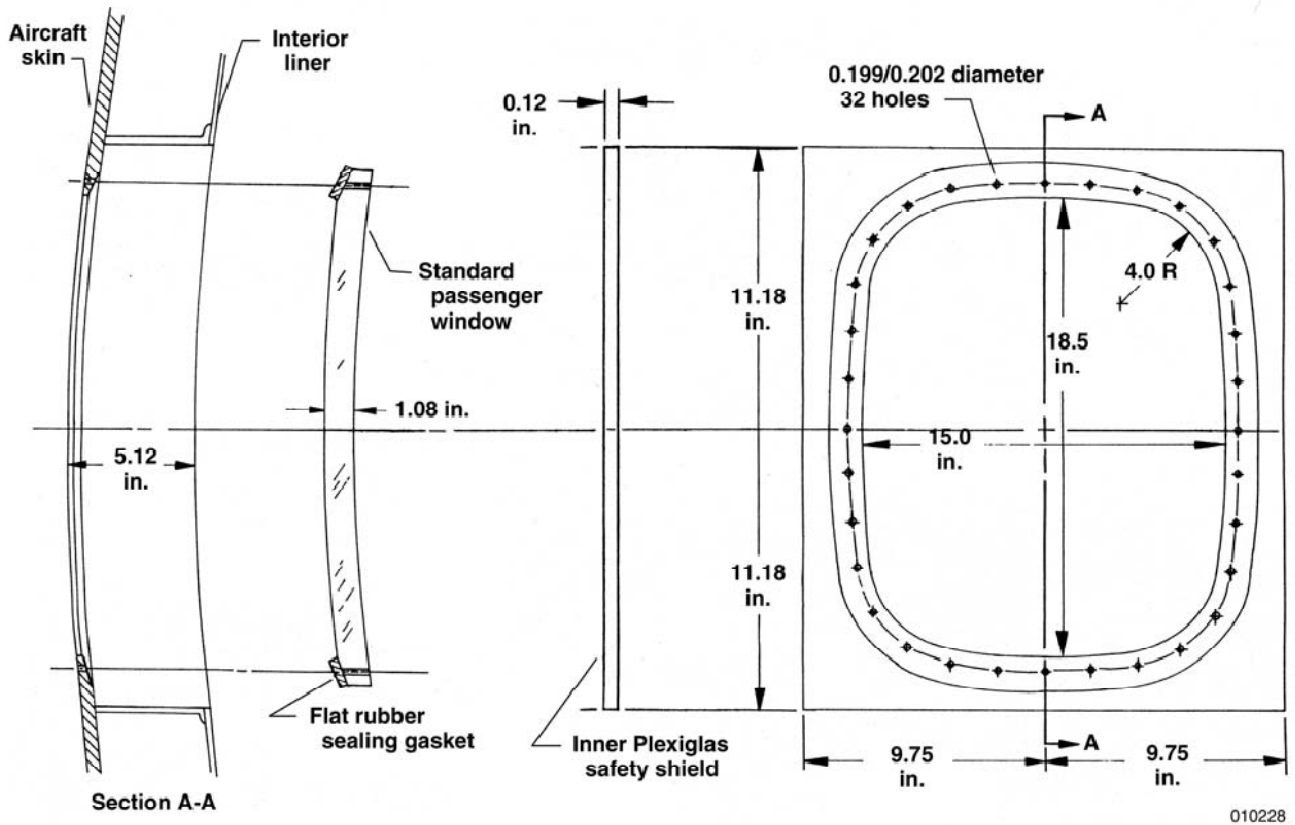

010228

Figure 4-7. Standard unmodified passenger window.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

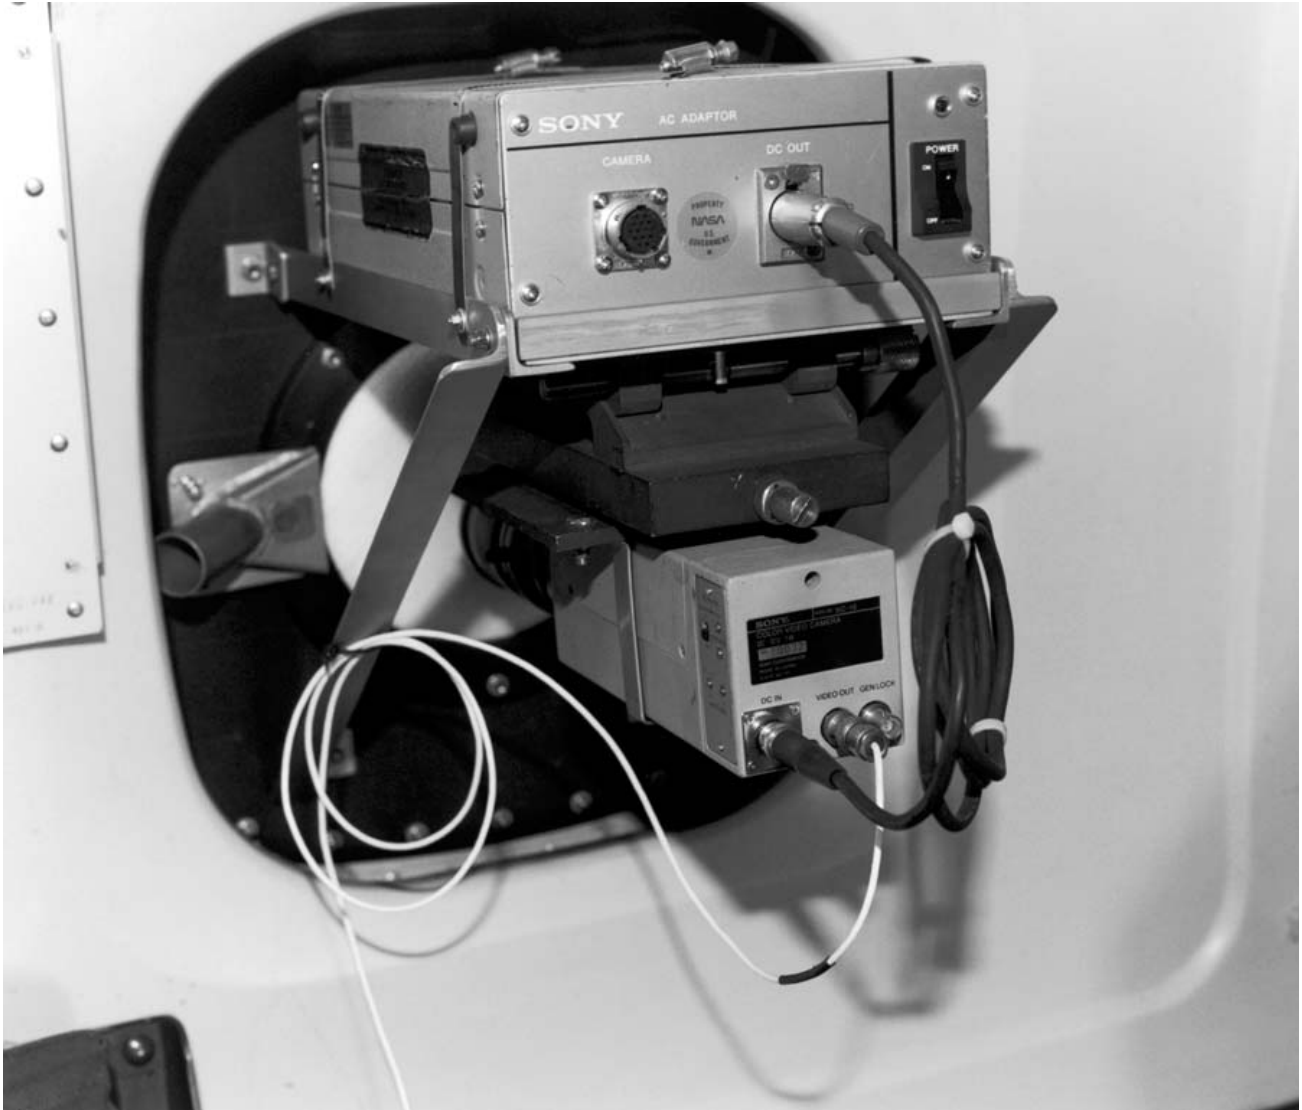


Figure 4-8. Radiometer on 8 ° insert panel.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

Table 4-2. Minimum thickness of window materials.



Material	Dimensions, in.		
	Outside Diameter	Clear Aperture Diameter	Minimum Thickness ¹
Soda Lime, Borosilicate Crown, Quartz, Fused Silica, Pyrex or Germanium	1.50	1.00	0.10
	2.50	2.00	0.20
	4.75	4.00	0.35
	6.75	6.00	0.50
	9.00	8.00	0.65
	11.00	10.00	0.80
	13.00	12.00	0.95
	15.00	14.00	1.10
Zinc Selenide ² , Arsenic Trisulfide Glass, Calcium Fluoride, Polyethylene, Polypropylene, etc.	17.00	16.00	1.25
	1.75	1.00	0.15
	2.75	2.00	0.25
	5.00	4.00	0.45
	7.00	6.00	0.65
	9.50	8.00	0.85
	11.50	10.00	1.05
UHMW Polyethylene ³	13.50	12.00	1.25
	15.50 (diagonal)	14.5 (diagonal)	1.60

¹. Minimum thickness allowed. Greater thickness is allowable up to the space available in the port system. Generally, the maximum thickness that can be accommodated is 1.25 in.

². Window thickness for materials in this group will be individually determined, based upon physical properties.

³. For non-circular windows, the minimum thickness is determined by the largest diagonal measurement.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

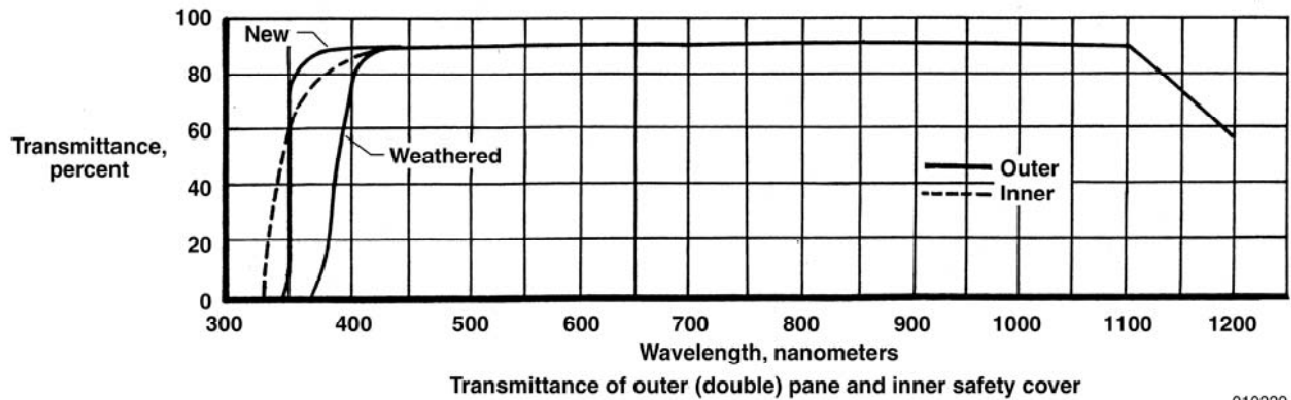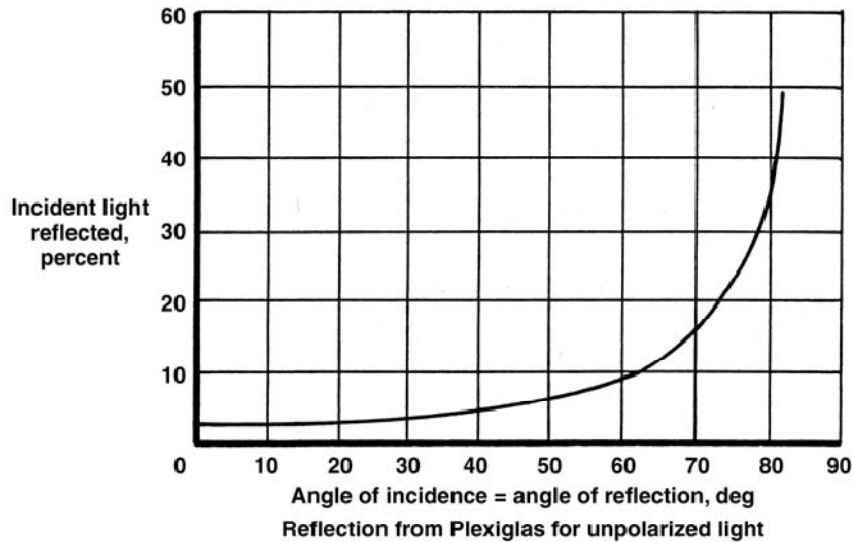

010229

Figure 4-9. Optical characteristics of standard unmodified passenger windows.

The assembly is first subjected to a leak test by applying a pressure differential to the window and its mounting frame. This assembly is then subjected to a greater pressure differential at room temperature to proof test the glass. Then it is subjected simultaneously to a pressure and temperature differential to environmentally test the entire assembly. Obtain a copy of the "Airborne Science Optical Window Program Plan" from your mission manager, for window testing details.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

After testing, the window assembly is held in secured storage until installation. If any disassembly or alteration is required, this test must be repeated. The nominal test procedure may be tailored to a specific window material when an appropriate fracture analysis is available.

C. Precautions After Installation

Assembly, adjustment, or repair operations to an experiment near a window must be performed with a window safety shield in place. Equipment should be designed so operations of this type take place with the shield closed. A scratch, gouge or chip in the window is likely to immediately disqualify it from further use. Therefore, the space between the optical window and safety shield should never be used for storage of loose items.

A defogging system is available for each modified viewport. Air supplied by the cabin gasper air system is directed across a designated window with a manually operated valve controlling the flow. The defogging system is normally adequate to prevent frosting or fogging at high altitudes. However, in regions of high humidity, if the aircraft has been cooled at a high altitude and descends quickly to an altitude where the optical surfaces have temperatures below the cabin dew point, condensation can occur on the window. If observations are then to be made, the window must be manually cleaned with an appropriate solution by an aircraft crewmember. If windows need cleaning, special arrangements for engineering assistance should be requested through the mission manager.

6. External Airflow Parameters

A. Angle of Airflow Over Viewports

For experiments that have elements mounted external to the fuselage, it is important to know the angle of the local airflow over a viewport. Air sampling probes attached to window blanks are generally aligned with this angle to ensure proper operation. Table 4-3 shows the approximate airflow angle relative to the fuselage floor plane for the passenger windows. Tables 4-4 and 4-5 show the same information for 62° and nadir viewports. Note that these angles are for Mach no. 0.8, which represents cruise conditions. The angle varies slightly with speed and aircraft trim, therefore if designing for other specific conditions, you should request engineering assistance through the mission manager.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

Table 4-3. Inviscid flow over passenger ports, relative to fuselage floor plan.

Window Number	Fuselage Station	Flow Angle, deg	Window Number	Fuselage Station	Flow Angle, deg
1	290	1.7	16	891	-7.8
2	330	2.1	17	930	-8.7
3	370	2.4	18	970	-9.2
4	410	2.7	19	1010	-8.7
5	450	3.0	20	1050	-6.9
6	490	3.5	21	1090	-5.4
7	530	4.3	22	1130	-4.2
8	570	6.4	23	1170	-3.4
9	610	10.6	24	1210	-3.1
10	650	9.3	25	1250	-3.1
11	691	4.5	26	1290	-3.3
12	729	1.0	27	1330	-3.4
13	770	-2.0	28	1370	-4.3
14	810	-4.2	29	1410	-5.3
15	846	-5.8			

Fuselage angle of attack: 1 deg (cruise conditions), Mach no. 0. 8

* See Figure 3-1

B. Boundary Layer Thickness

A thin, variable thickness layer of air, known as the boundary layer, exists at the skin of the aircraft. The properties of this air do not represent free stream, undisturbed conditions; therefore, experimenters should place their devices far enough away from the fuselage to be in free stream air. Free stream conditions can be obtained by placing the sampling device at a spacing defined as approximately 1.2 in. per 100 in. of distance measured from the aircraft nose. Station numbers represent the distance, in inches, from the nose of the aircraft. For example, a probe placed in the first passenger window at station no. 290 must be spaced away from the fuselage by: $290 \times 1.2 \text{ divided by } 100 = 3.48 \text{ in. (8.84 cm)}$.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

Table 4-4: Inviscid flow over 62° ports, relative to vertical centerline and fuselage floor planes.

62° Viewport Number	Fuselage Station	Flow Angle Y-Direction, deg	Mach = 0.8 Z-Direction, deg
1	470	-1.4	0.8
3	1090	2.2	-1.2
4	1130	1.8	-1.0
8	1310	1.2	-0.7

+Y = Outboard
+Z = Up
Mach = 0.8

Table 4-5: Inviscid flow over nadir ports, relative to vertical centerline and fuselage floor planes.

Nadir Viewport Number	Fuselage Station	Flow Angle Y-Direction, deg	Mach = 0.8 Z-Direction, deg
2	420	0.0	0.0
5	1130	-0.8	-0.1
7	1200	0.0	-0.1
9	1310	-5.5	2.6

+Y = Outboard
+Z = Up
Mach = 0.8

C. Fuselage Angle of Attack

At a Mach no. 0.8 and cruise altitude, the fuselage will have approximately a 1° angle of attack relative to the horizontal plane of the earth. Instruments that require an absolute line-of-sight should account for this angle in their design. Scanners and cameras are examples of instruments that often require an accurate nadir view.

**NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK**

CHAPTER 5

EXPERIMENT CONSTRUCTION AND INSTALLATION

1. General Information

The installation of experimenters' equipment onto the aircraft is one of the most difficult and time-consuming aspects of airborne research. Accustomed to the relative ease of commercial airline travel, experimenters may not fully comprehend the problems encountered in the secure mounting of airborne test equipment to comply with the mandated safety requirements.

For this reason, adherence to the specifications, deadlines, and technical requirements listed in chapters 4, 5 and 6 is expected.

NOTE: Due to manpower limitations, major engineering and/or construction defects cannot, ordinarily, be corrected during equipment installation. Therefore, in the past, some experimenters with unacceptable equipment have been required to withdraw at the last moment. Careful adherence to the standards described in this chapter, and the procedures and timing for equipment certification (see Equipment Certification and Hazardous Equipment and Materials Certification, sections 8 and 9 of this chapter), will ensure a relatively trouble free installation. These standards fully meet or exceed all FAA mandated safety requirements for DC-8 type aircraft.

2. General Arrangement

The mission manager customarily prepares the aircraft floor plan. The plan is based on experimenters' requirements, equipment, auxiliary systems and seating. In certain cases, however, a partial floor plan may be proposed by another organization, coordinating the efforts of several different experimenters. Individual requests for specific locations, as well as proposals with partial floor plans, will observe the following restrictions.

A. Exit Areas

Cabin exit areas and the forward and rear interior cargo access hatches will be kept clear at all times. A single overwing exit may be blocked, depending on cabin configuration.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

B. Aisles

An aisle at least 20 in. wide, along the entire length of the main cabin, will be maintained.

C. Seat Spacing

The nominal passenger seat spacing is 38 in. (96.5 cm). Between the forward edge of any passenger seat and the aft edge of an instrument rack, 15 in. (38.1 cm) nominal is allowed. There is a center-located armrest which extends 3 in. (8 cm) forward of the seat cushion and is 26 in. (66 cm) high. Drawers mounted in outboard bays of standard instrument racks should be installed 27 in. (69 cm) above the floor to avoid obstruction.

D. Unavailable Areas

The housekeeping rack, the navigator console, and the mission director console are positioned between station 265 and station 480 on the right side of the cabin. This area is not available for experimenter equipment.

E. Cargo Areas

Limited cargo compartment floor areas are available to experimenters. On flights based away from DFRC, cargo space must be reserved for aircraft spare parts, aircraft support equipment, and baggage. This may require shipping experimenter support equipment to forward locations well in advance of actual DC-8 deployment.

3. Construction Guidelines

The design of aircraft systems and equipment installations for use on the DC-8 shall follow standard aircraft industry design practice and Douglas Aircraft design criteria. In addition, current FAA certification standards are to be met to the maximum extent practical, consistent with the intended mission of the payload. For more complete coverage of the design requirements, contact DFRC for a current copy of "DC-8/N817 Design Requirements." Brief guidelines for the construction of experimenter equipment follow.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

A. Load Factors

1) Passenger Cabin and Cargo Areas

All structures, attachments and fasteners for racks, instruments, pallets, tie-down retainers, carry on items, etc. must be designed to withstand the load conditions listed below. These load factors, when applied one at a time, must not produce a stress in any structural element of the equipment beyond the accepted ultimate strength of that construction material.

Table 5-1. Minimum crash load design criteria.

Load Direction	Ultimate Load Factor, g	
	Passenger Cabin	Cargo Compartments
Forward	9.0	3.0
Down	4.5	4.5
Up	2.0	2.0
Lateral	3.0	1.5
Aft	1.5	1.5

The load factors listed are for the structural design of the equipment only. It is not required that alignment, calibration, or other instrument functions be maintained under these load conditions.

2) External Attachments

All external structures must be designed to withstand the maximum aerodynamic and gust loads encountered. A safety factor of 2.25 is applied to each of the maximum loads (except gust loads). Then the appropriate sums are compared with the accepted limits of the fabrication materials and surrounding structure. Close coordination with DFRC is advised.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

B. Design Pressures - Cabin Environment

In general, experiment structures (other than optical windows) designed to act as a critical component of the aircraft's pressure vessel shall be designed to ultimate pressure, 2P (see table 5-2) plus flight loads and aerodynamic pressure or suction effects.

It is the policy of DFRC Airborne Science Directorate to design such structures at DFRC to experimenter requirements. Exceptions to this procedure require consultation, review, and approval of the mission manager and operations engineer prior to fabrication.

Table 5-2. Minimum pressure vessel design criteria.

Design Parameter	Pressure Limit, psi
Maximum Cabin Differential Pressure	8.77
Maximum Emergency Relief Pressure (P)	9.27
Design Limit Pressure	$9.27 \times 1.33 = 12.33$
Design Ultimate Pressure (2P)	$9.27 \times 2 = 18.54$
External Fuselage Pressure (Ditching)	Variable, depending on station number. Up to 15 psi on initial impact in the tail section and 12 psi in the nose due to pitch-over.

C. Materials

Aircraft structural material should be used on the design of special load-carrying supports. Aluminum such as 2024, 6061, and 7075 is readily available for this purpose.

Experimenters designing their experimental equipment should avoid using flammable materials or materials that emit toxic fumes. For example, the external cabling of commercial electronic components must have self-extinguishing insulation, such as Teflon or Tefzel. Accessories such as cable ties, clamps, or identification sleeves must be of a similar material (see chapter 6).

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

Polyvinyl Chloride (PVC) is not approved for use in airborne applications. Experimenters should carefully review their drawings and parts lists to insure that PVC insulated external wire or cable, or PVC hose is not specified. Internal wiring of commercial off-the-shelf products, such as computers, is excepted. PVC products cannot be used on the aircraft due to the highly toxic fumes and dense black smoke emitted upon exposure to high temperature (see chapter 6).

The use of toxins, flammable gases, or corrosive liquids must be approved by the mission manager prior to planning for an experiment. See section 9 of this chapter for additional information about certification of hazardous materials.

D. Welding

Welding structural members of experimental equipment may be acceptable; however, bolting and/or riveting are preferred. Welded structures should be avoided for significant load bearing and/or externally mounted structure. Where necessary, use stainless steel or steel. When welding is required, a welder who is currently certified to AMS-STD-1595 specifications must perform it. The assembly should then be heat-treated, if full joint strength is required. The welds must be performed in accordance with the "Fusion Welding for Aerospace Applications" SAE-AMS-STD-2219 specification. Proof of conformance to both specifications must be submitted with the welded assembly. If this is not done, the assembly will be subjected to rigid NASA DFRC inspections and, if not passed, may not be permitted on the aircraft. Care must be taken to use only materials suitable for welding. Welding is not permitted on the aircraft.

E. Fasteners

Standard aircraft structural fasteners (MS, NAS, or the equivalent) must be used for all structural members and must be secured by some locking method (such as self-locking nuts, lock washers, cotter pins, or safety wire.) This requirement includes the installation of components into standard DC-8 equipment racks, and mounting on other support frames or aircraft hard points. These types of fasteners should also be used for other elements of the equipment whenever possible.

Data sheets, giving detailed nomenclature and the engineering specifications for this type of hardware and a list of suppliers is available on request.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

F. Hydraulic or Pneumatic Systems

Hydraulic and pneumatic lines and fittings should be aircraft quality, or equivalent, and should operate at the lowest pressure possible. Fluids should be non-flammable, non-corrosive, and non-toxic.

G. Alignment with Existing Hardpoints

Experimenters' equipment to be attached to aircraft hardpoints, existing shelves, viewport Brownline rails, or to the top of DC-8 standard racks, should be match-drilled at assembly. Local fitting dimensions may vary slightly from nominal values, and safety requirements may preclude the use of slotted or enlarged holes to obtain a fit.

H. Aircraft Fuselage Penetrations


Fuselage penetrations larger than one-half in. diameter from the pressurized areas of the aircraft to the aircraft exterior for probe inlet or exhaust tubes require shutoff valves. The valve should be located in the proximity of the bulkhead penetration.

4. Aircraft Vibration

In-flight vibrations are generally not a problem for experimenters as the DC- 8 exhibits a low level of vibration characteristic of large jet aircraft. Figure 5-1(a), 5-1(b), and 5-1(c) show the in-flight vibration spectra in five areas of the aircraft.

Vibration frequencies and amplitudes imparted to experimental equipment are subject to the widely varying contribution of different mounting structures. If instrument components are sensitive to any of the frequencies at the power densities shown, then it is recommended that isolation mounts for these components be considered in the over-all design of equipment. Captive-type isolators should be used.


NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

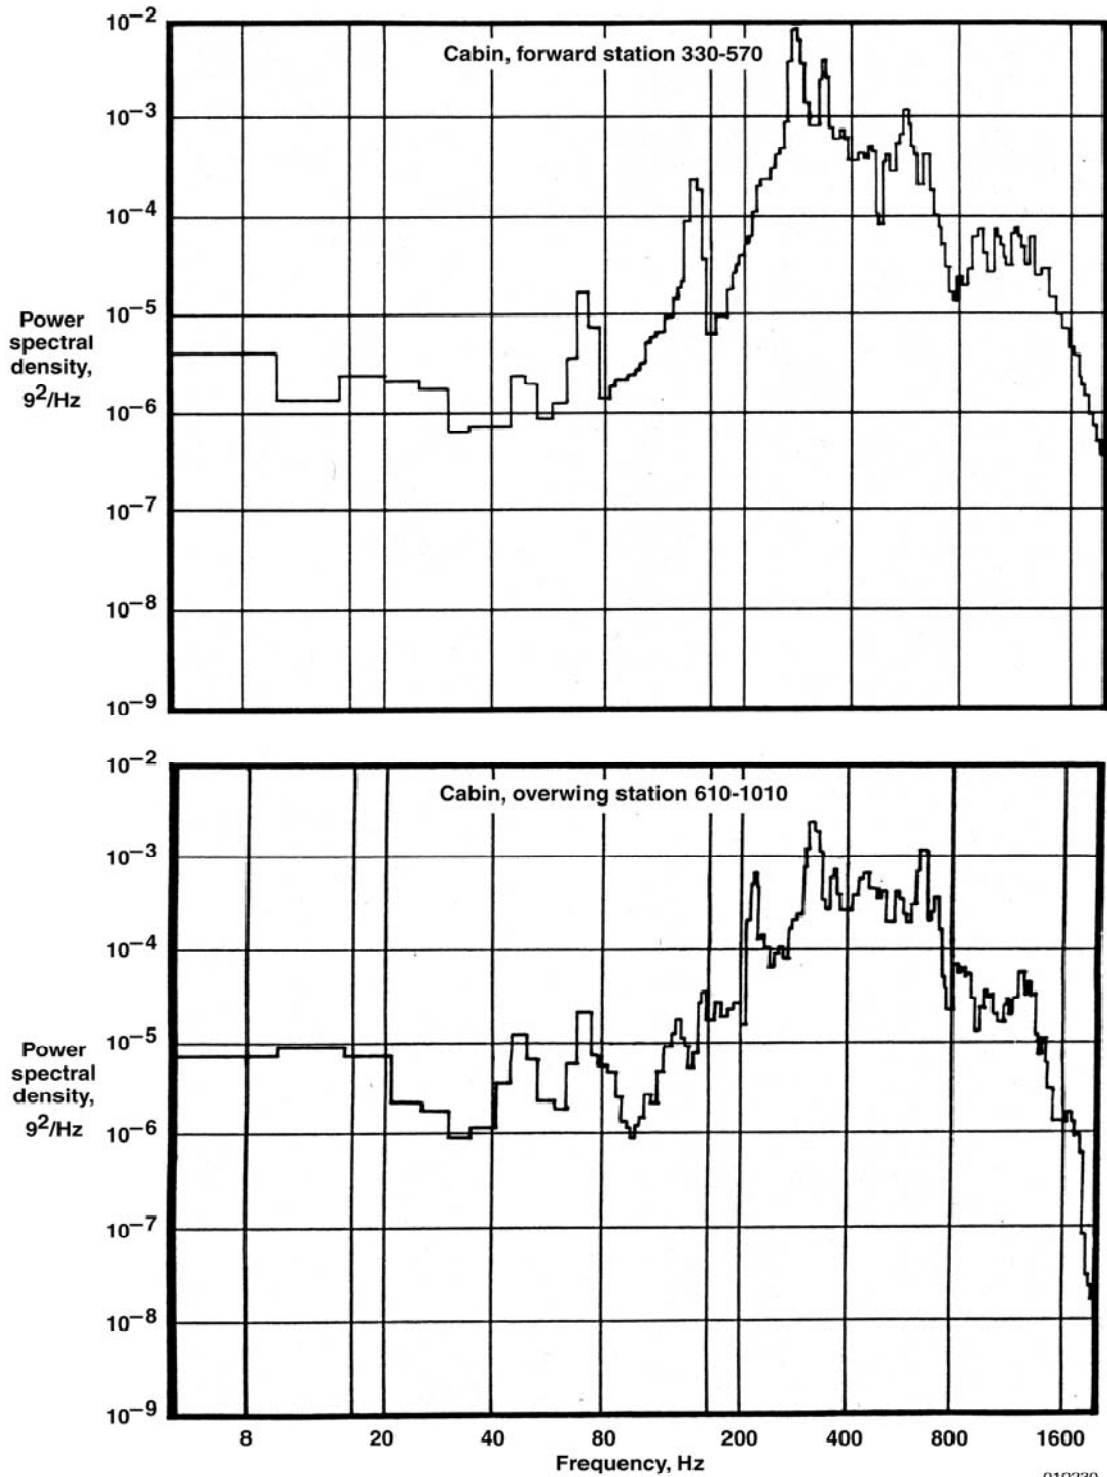

010230

Figure 5-1(a). In-flight vibration spectra.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

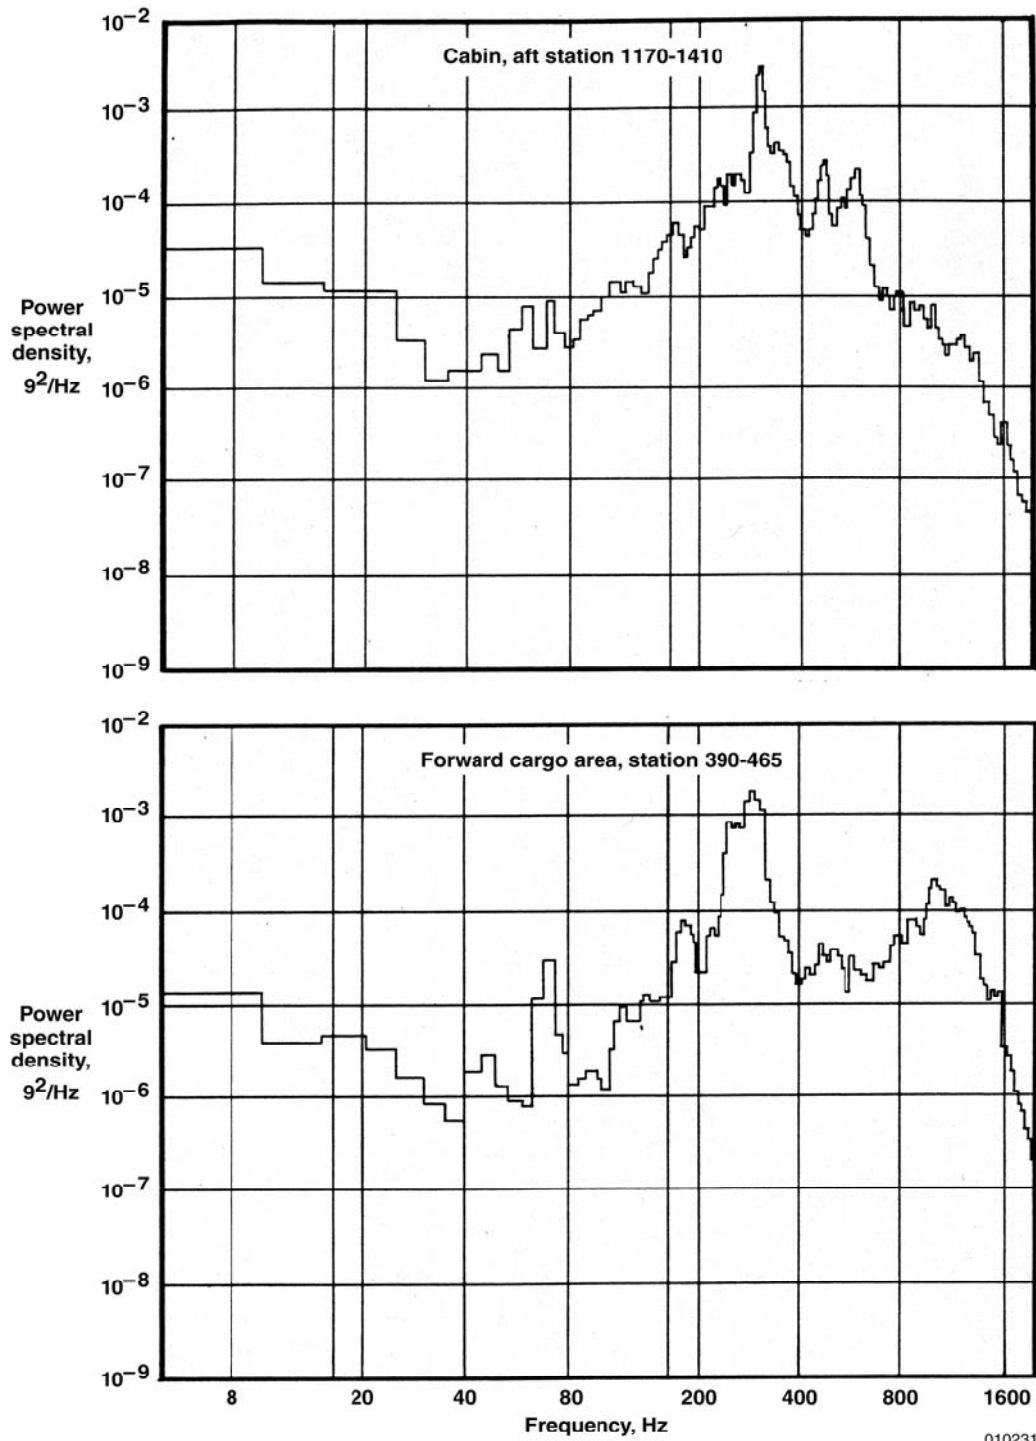

010231

Figure 5-1(b). In-flight vibration spectra.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

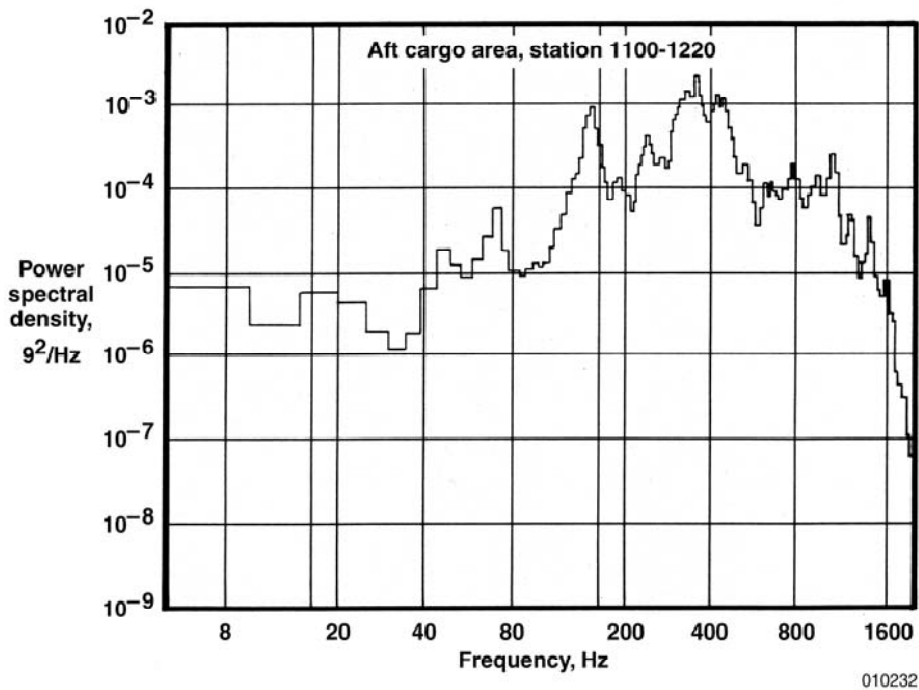


Figure 5-1(c). In-flight vibration spectra.


Experimenters should remember that, except for air turbulence, the most severe vibration usually occurs during taxi, take-off and landing. For example, on rough runways, printed circuit cards and connectors have become dislodged, and optical components have been jolted out of alignment. Mechanical support, by clamps, brackets or dampener should be provided as a precaution, for such problems may prove difficult to correct in flight. Representative values for these conditions are one-quarter to one-half at 10 Hz and below.

The DC-8 mission manager should be consulted for specific guidance on vibration-related concerns. Arrangements can be made for component tests at DFRC, if required. The test facility generates sinusoidal forces up to 8,000 lb, at frequencies from 5 to 2,000 Hz, and random forces up to 5,000 lb. Components up to 24 in. in size can be tested, one axis at a time, at accelerations up to 100 g.

5. Structural Attachments

Guidelines follow for the attachment of experimenters' equipment to the aircraft.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

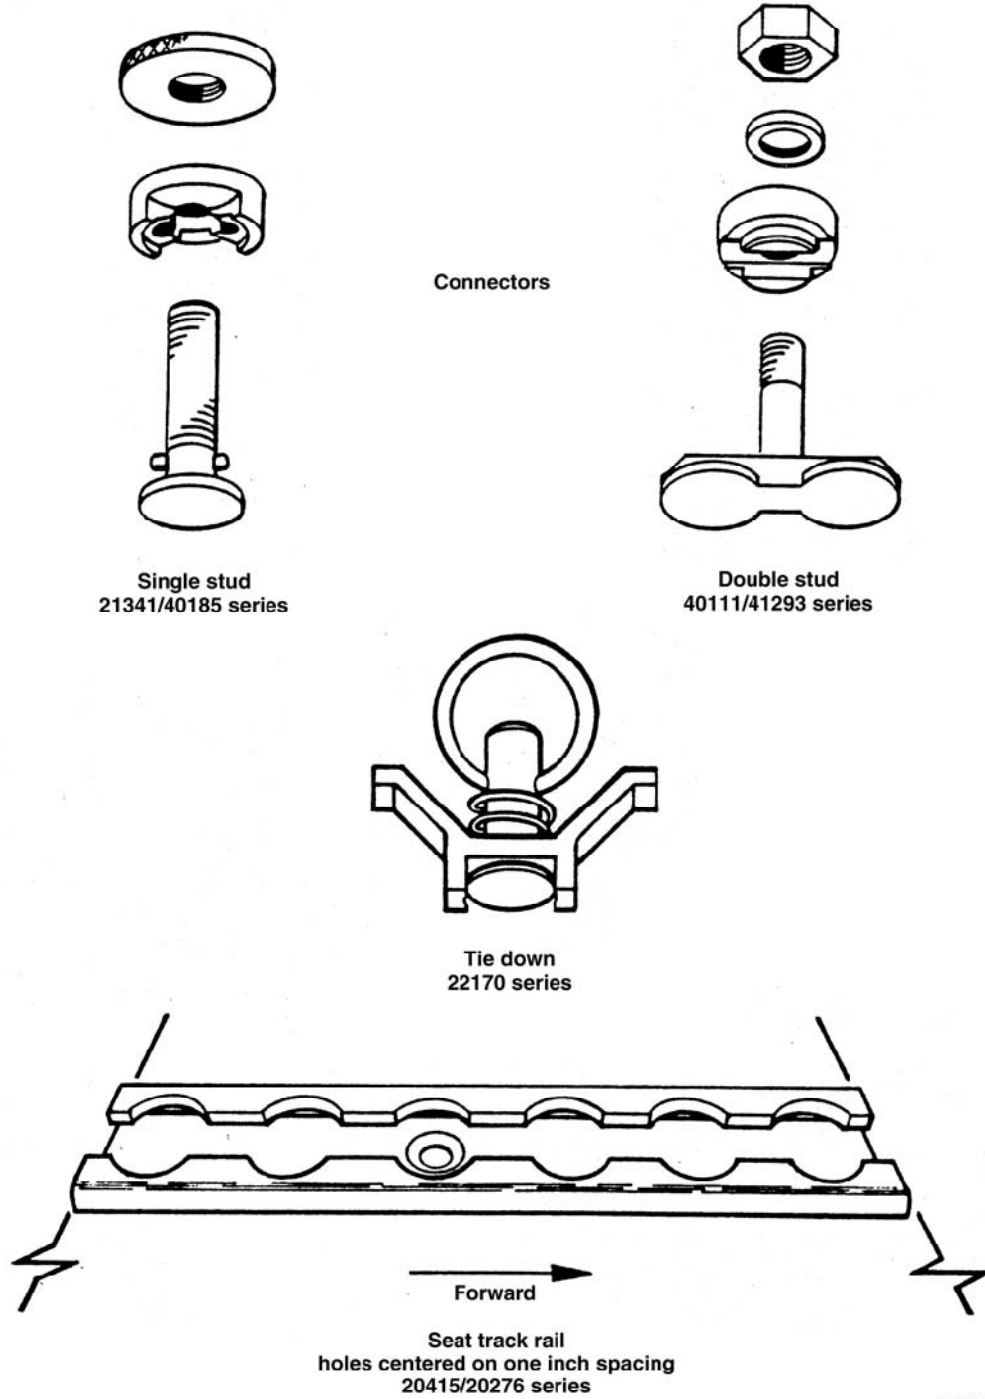

010233

Figure 5-2. Seat rails and clamps.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

A. Aircraft Cabin

Structural attachment in the cabin area will be primarily accomplished by connection to seat and viewport rails.

1) Seat Rails

A pair of rails on each side of the main cabin floor is used to attach the passenger seats, using special fittings (figure 5-2). These same fittings are also used to attach experiments to the seat rails and to the viewport Brownline rails. The maximum allowable loads that can be applied to each of the floor rail fittings are given in figure 5-3.

2) Viewport Rails

Brownline rails in fore-aft orientation at the top and bottom of each viewport can be used for experiment attachment. Only shear and/or tension loads are permitted at these rails. Therefore, single stud attachment of hardware to the rails, that will cause a moment reaction to the rail, will not be permitted.

B. Cargo Compartments

Experimenter equipment can be mounted (to the Brownline rails) in both the forward and aft cargo compartments. Due to the limited floor space available on flights based away from DFRC, cargo compartment installations should be discussed beforehand with the DC- 8 mission manager.

The cargo loading doors open inward, sliding along the curved hull of the aircraft. Equipment installations must not interfere with the movement of these doors (figure 3-4).


C. Other Equipment Mounting Locations

It is possible to mount experimenters' equipment on the exterior of the aircraft at certain specified locations. All such requests must be considered individually. Experimenters who consider installations of this type should visit DFRC at least twelve months in advance, to examine the aircraft and discuss plans in detail with personnel.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

Maximum applied load per connector (Including load factors)	
Tension	5,000 lb
Shear	5,000 lb
Bending	2,300 in. lb

Note: When connectors are subjected to combined loads. The above limits may be reduced. Contact DFRC for specific requirements and approvals.

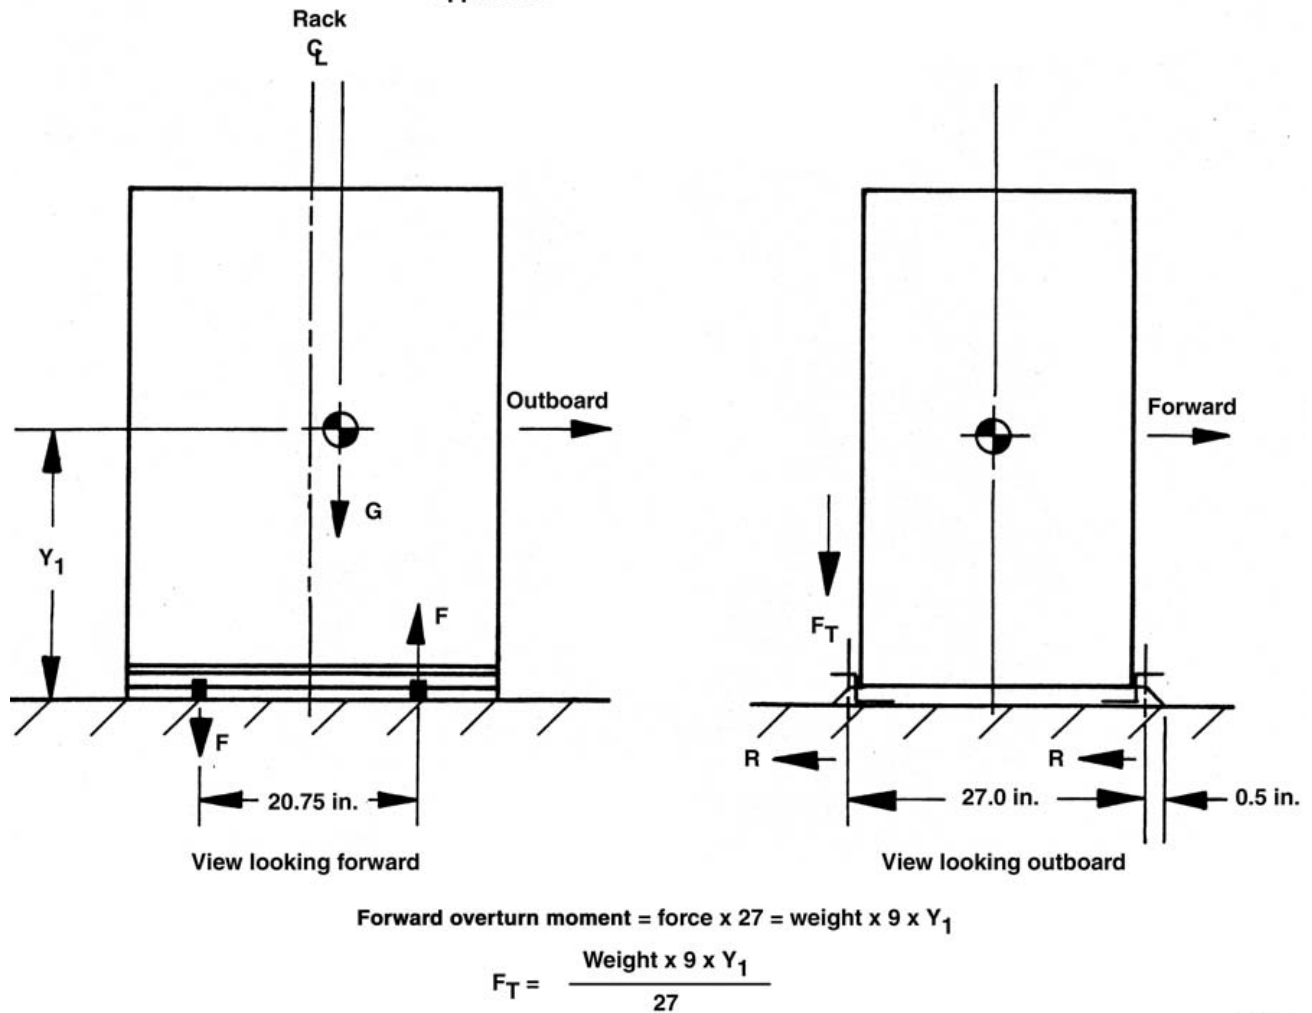

010234

Figure 5-3. Loads for a standard rack and connectors.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK


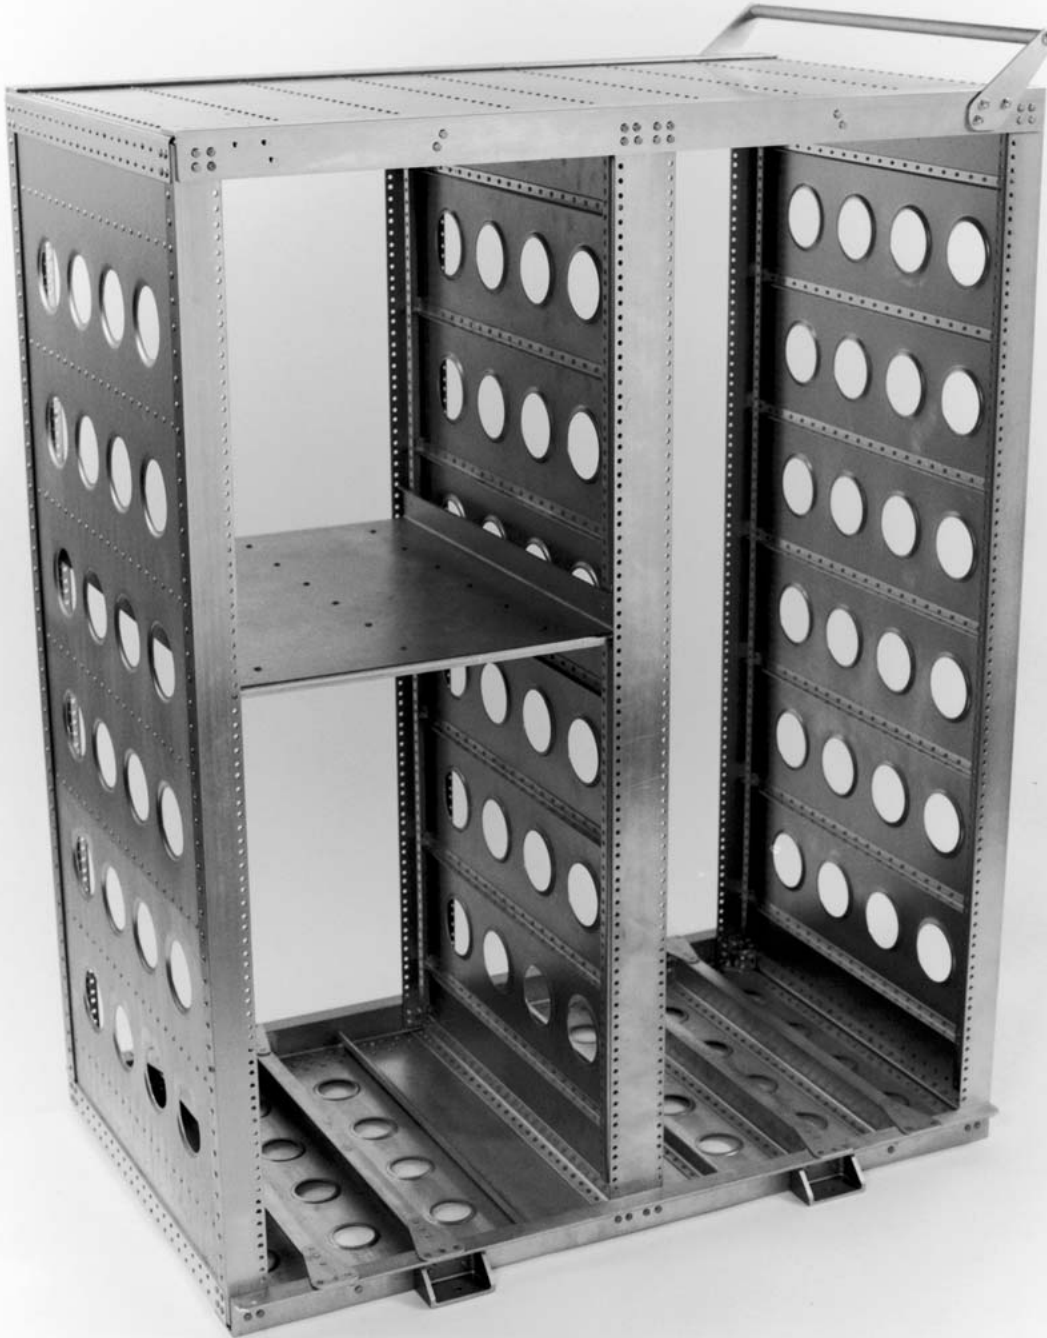


Figure 5-4(a). Standard equipment racks – high rack.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

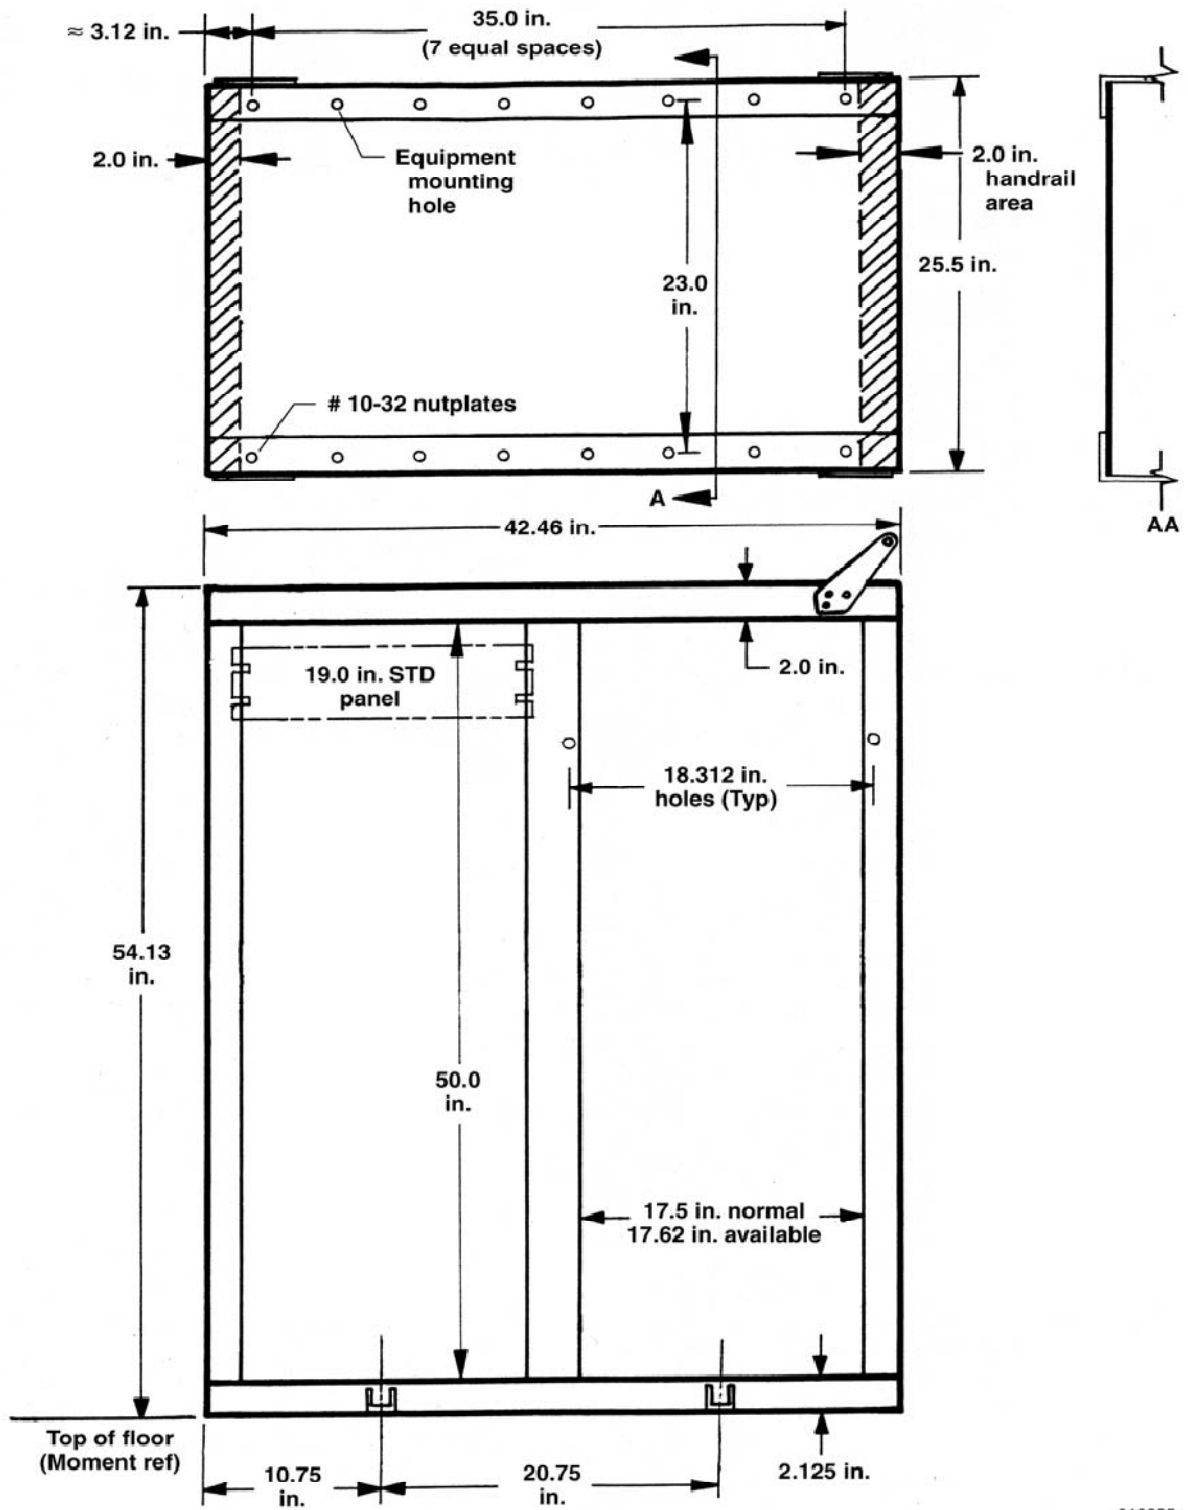

010235

Figure 5-4(b). Standard equipment racks – high rack – dimensions.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK


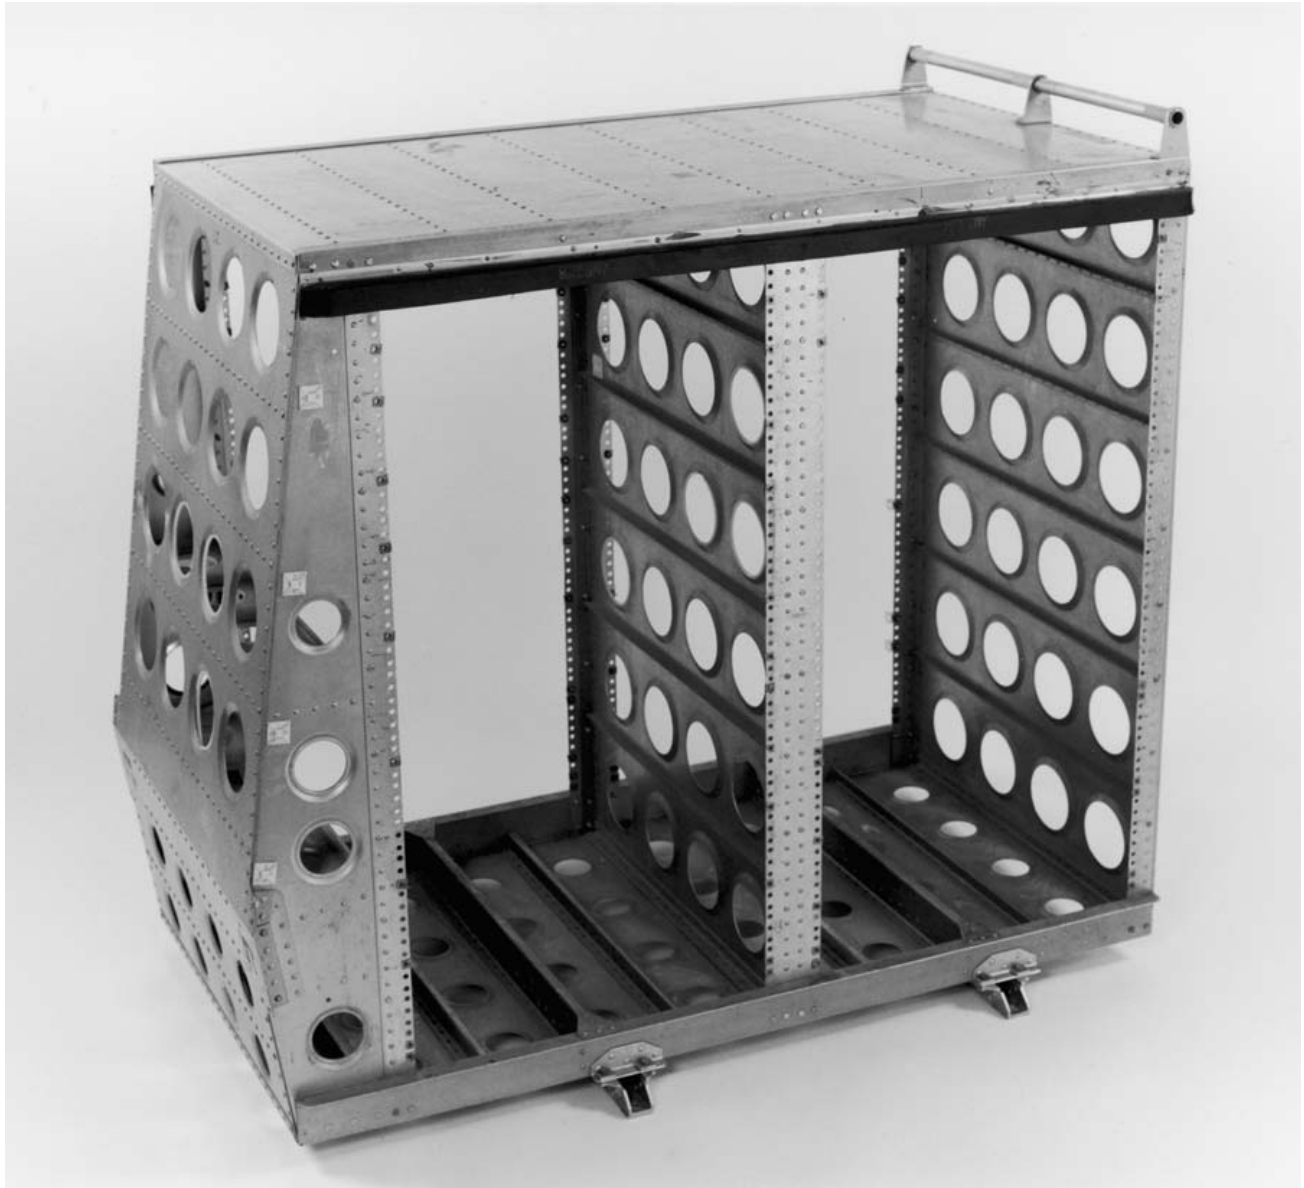


Figure 5-5(a). Standard equipment racks – medium rack.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

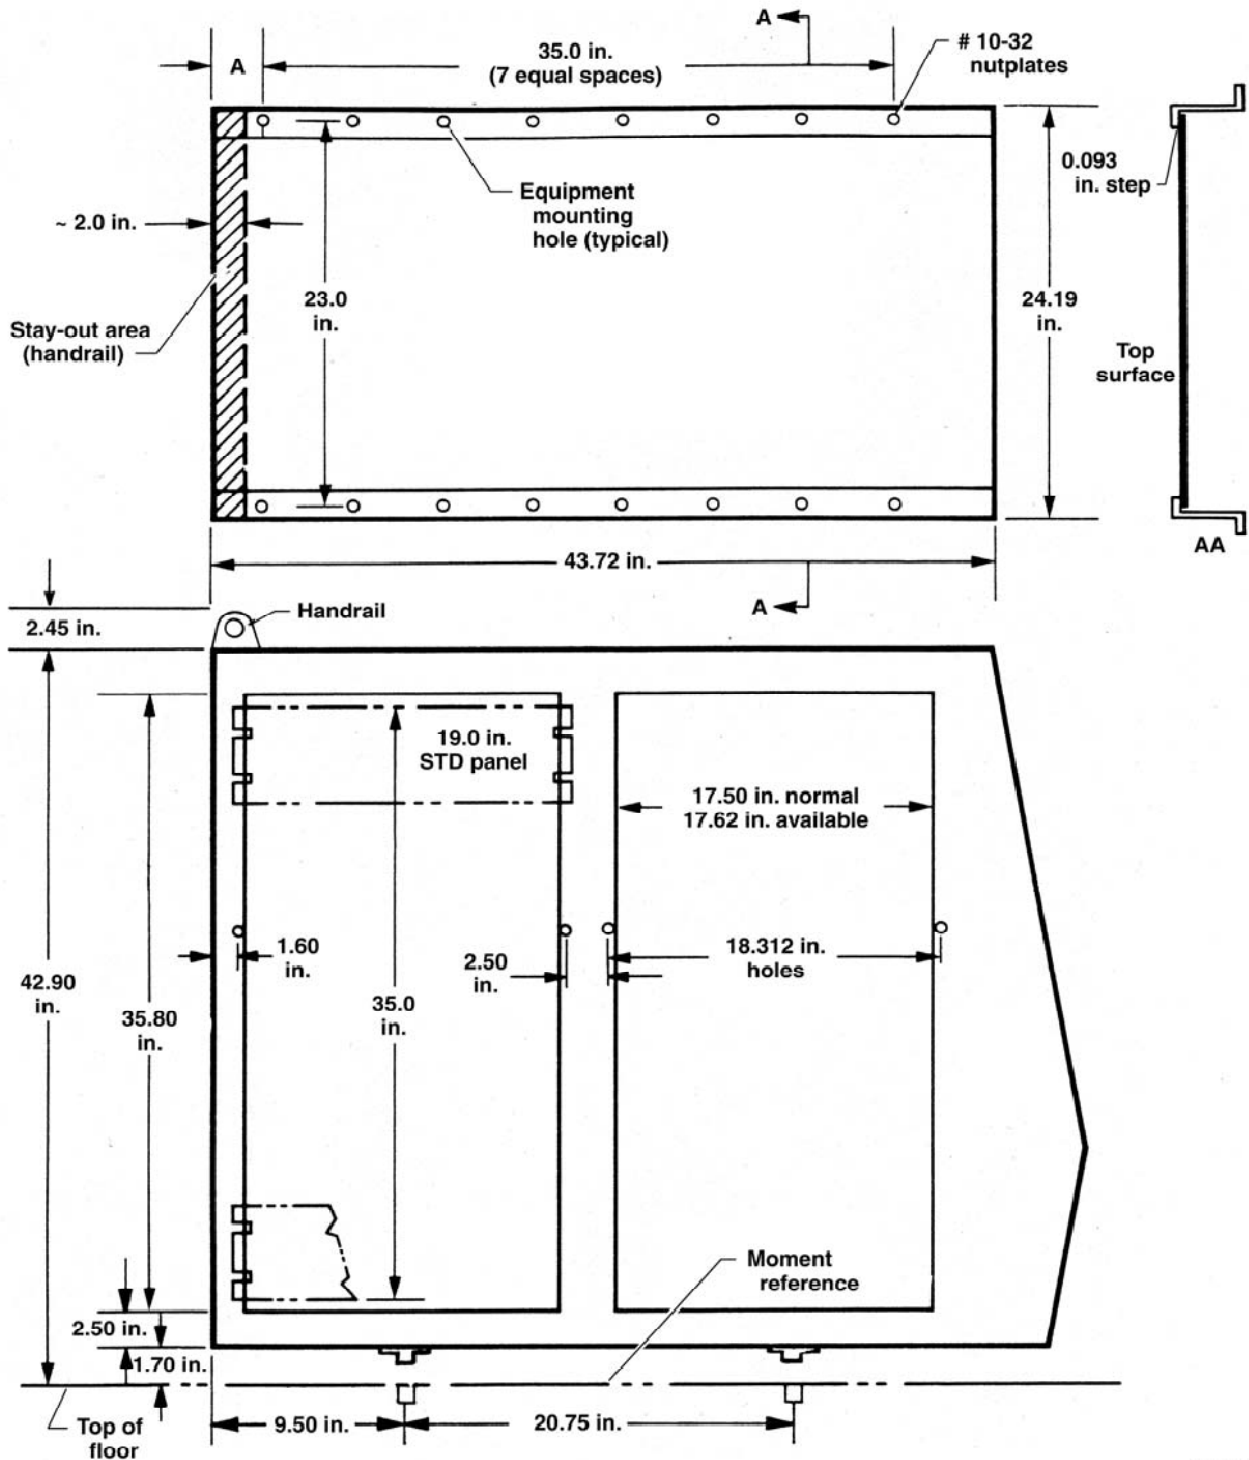

010236

Figure 5-5(b). Standard equipment racks – medium rack – dimensions.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK


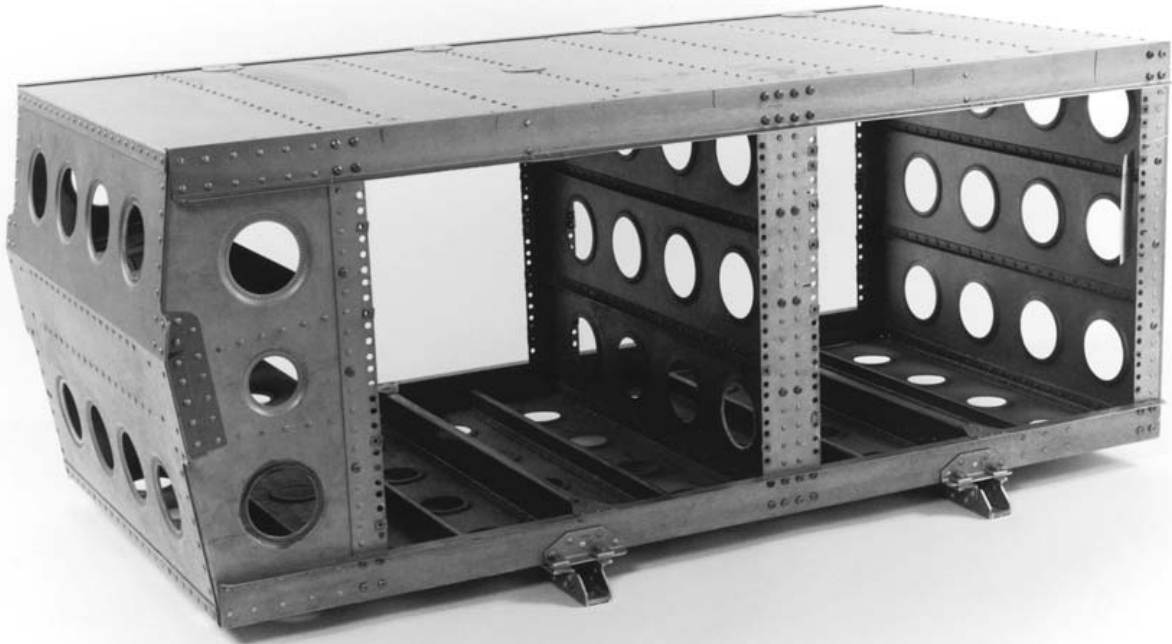


Figure 5-6(a). Standard equipment racks – low rack.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

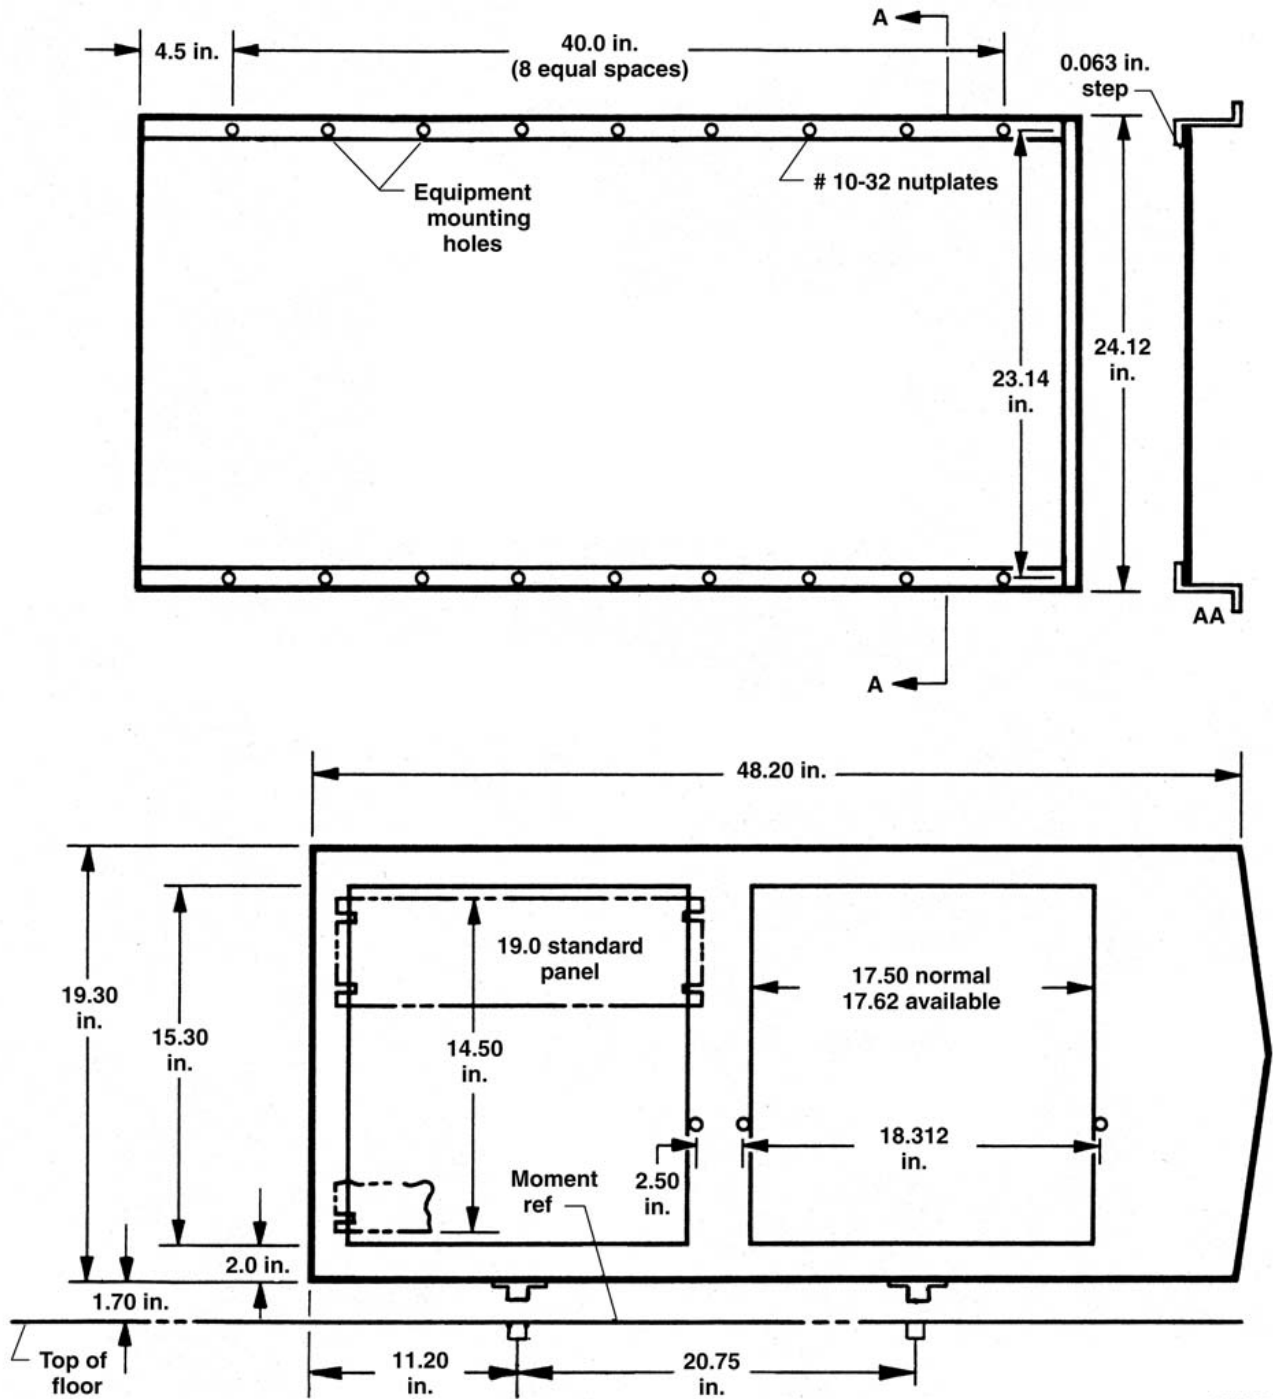

010237

Figure 5-6(b). Standard equipment racks – low rack – dimensions.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

6. Standard Equipment Racks

Equipment racks that fasten directly to the seat rails have been designed for use in the aircraft main cabin. The racks are designed to accept standard rack-mounted test equipment, 19 in. (48.3 cm) wide, and are available to all experimenters. The racks are available in three sizes: a high rack with two bays, each 50 in. (127 cm) high by 25 in. (63.5cm) deep, as shown in figure 5-4(a) and 5-4(b); a medium rack with two bays, each 35 in. (88.9 cm) high by 24 in. (61.0 cm) deep, as shown in figure 5-5(a) and 5-5(b); and a low rack with two bays, each 14 ½ in. (36.8 cm) high by 24 in. (61.0 cm) deep, as shown in figure 5-6(a) and 5-6(b). Equipment can be mounted on either side of the racks facing both forward or aft.


The maximum allowable equipment (or tare) weight for low and medium racks is 300 lb (136 kg) per rack bay; for high racks, it is 450 lb (204 kg) per rack bay¹. These weights include any equipment mounted on top of the racks. The total allowable overturning moment for all equipment, in or on low and medium racks is 6,000 in.-lb per rack bay; for high racks, it is 9,000 in.-lb per rack bay. Moment arms are measured vertically from the floor level to the center-of-mass of each component. These weight and moment values take into account the load factors and allowable loads and do not include the weight of the rack itself. Stress analysis of rack structure or rail attachments is not required, except for nonstandard installations.

The equipment racks are often used as support platforms for mounting equipment. The high and medium racks are used for experiments utilizing overhead view ports, and the low rack for those utilizing the passenger viewports or windows, as well as for other heavy equipment. Experimenters should consult with the mission manager when planning to use the top of any rack to mount equipment. These types of installation requests are considered individually and may, in certain cases, require stress analysis even though the weights and moments do not exceed the values listed. The positions of the high, medium, and low racks relative to the viewports are shown in figure 5-7 to assist the design of rack-top mounts.

NOTE: Modifications to the standard equipment racks, however minor, are not permitted under any circumstances.

¹ For rack loads approaching limiting values, the lateral center of gravity should be located at the vertical center post. Deviations from this requirement may reduce the allowable weight for all racks.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

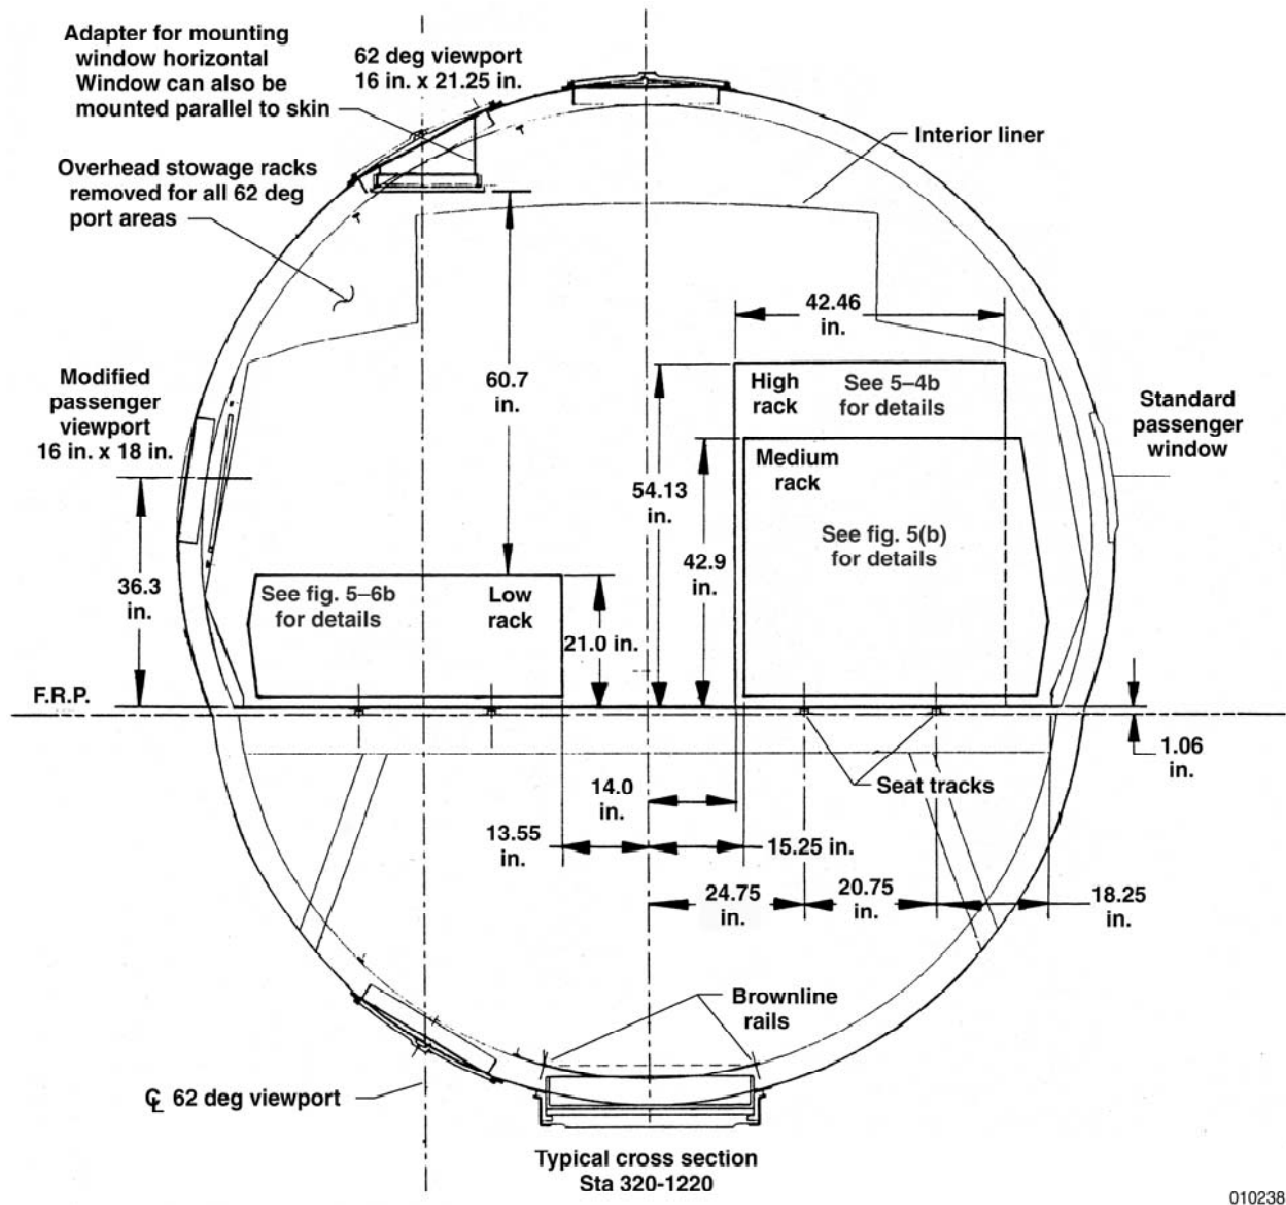

010238

Figure 5-7. Installed equipment racks and viewports, cross section.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

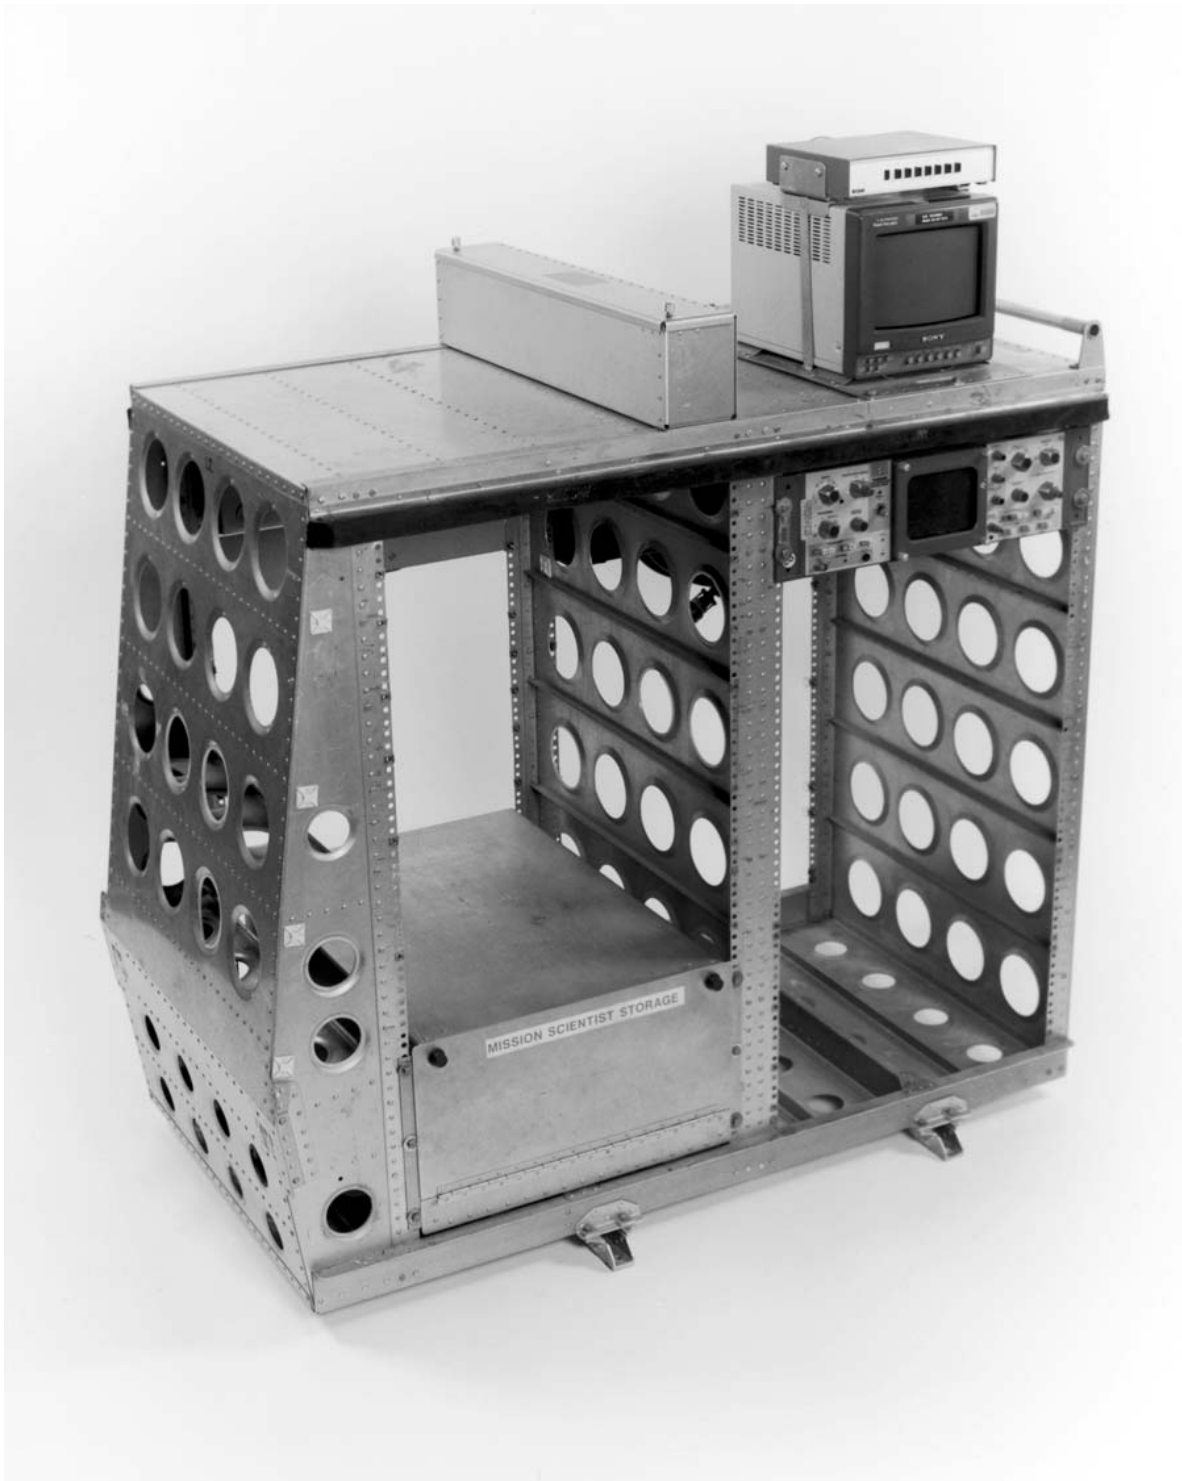


Figure 5-8. Typical installation in equipment rack.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

Experimenters are requested to make preliminary scale layouts of their equipment in the racks (calculating allowable loads and moments given earlier), and to prepare a list of sizes and weights (panel height, depth, and individual weight). Further, it is advisable to place the heavier items near the bottom whenever possible, to reduce the overturning moment. DFRC will use this information to check loading and moments, and to determine the internal support and bracing required to distribute the loads to the rack structure. For help performing these calculations, contact the mission manager to request engineering assistance.

7. Mounting Techniques

All articles, regardless of size, must be secured during takeoff and landing. When airborne, it is permissible to relocate items that are necessary for experiment operation or maintenance and that weigh less than ten lb (4.5 kg). Because of the potential for air turbulence, however, those items should be secured again after relocation. Personal possessions such as bags, briefcases, cameras, laptops, and binoculars are included in this requirement.

A. Cabin Area

The preferred method of mounting equipment is to use the standard racks. Equipment with standard 19 in. (48.3 cm) panels can often be mounted directly into the vertical support rails.

Refer to appendix A for guidelines to the mounting of individual items of equipment in the experimenter racks. A supply of rackmounted support trays is in stock at DFRC. Typical examples of their use are shown in figure 5-9.

When a rack is shipped to an experimenter for equipment installation, a supply of clip nuts, NAS fasteners, and trays can be included if arranged in advance. Since unique support requirements cannot be anticipated, experimenters are encouraged manager for engineering assistance.

Smaller components and components without mounting panels can be supported on solid trays of structural-grade aluminum (figure 5-9 and appendix A). These trays span the full depth of the rack and have flanged edges for stiffness and to expedite attachment to the vertical rails.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

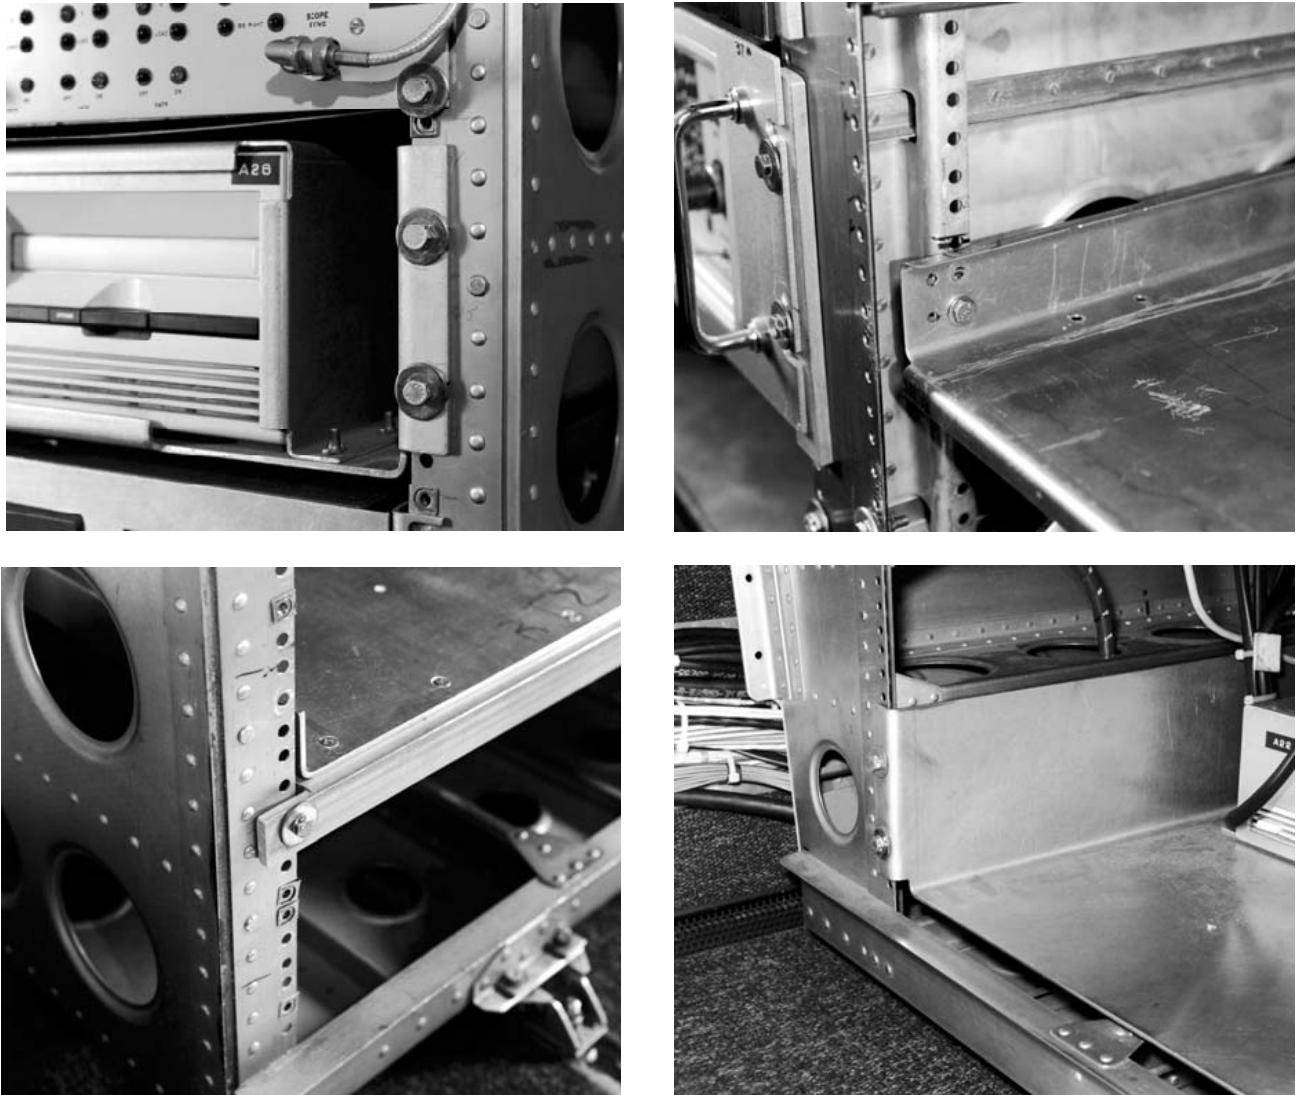


Figure 5-9. Typical tray mounting configurations.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

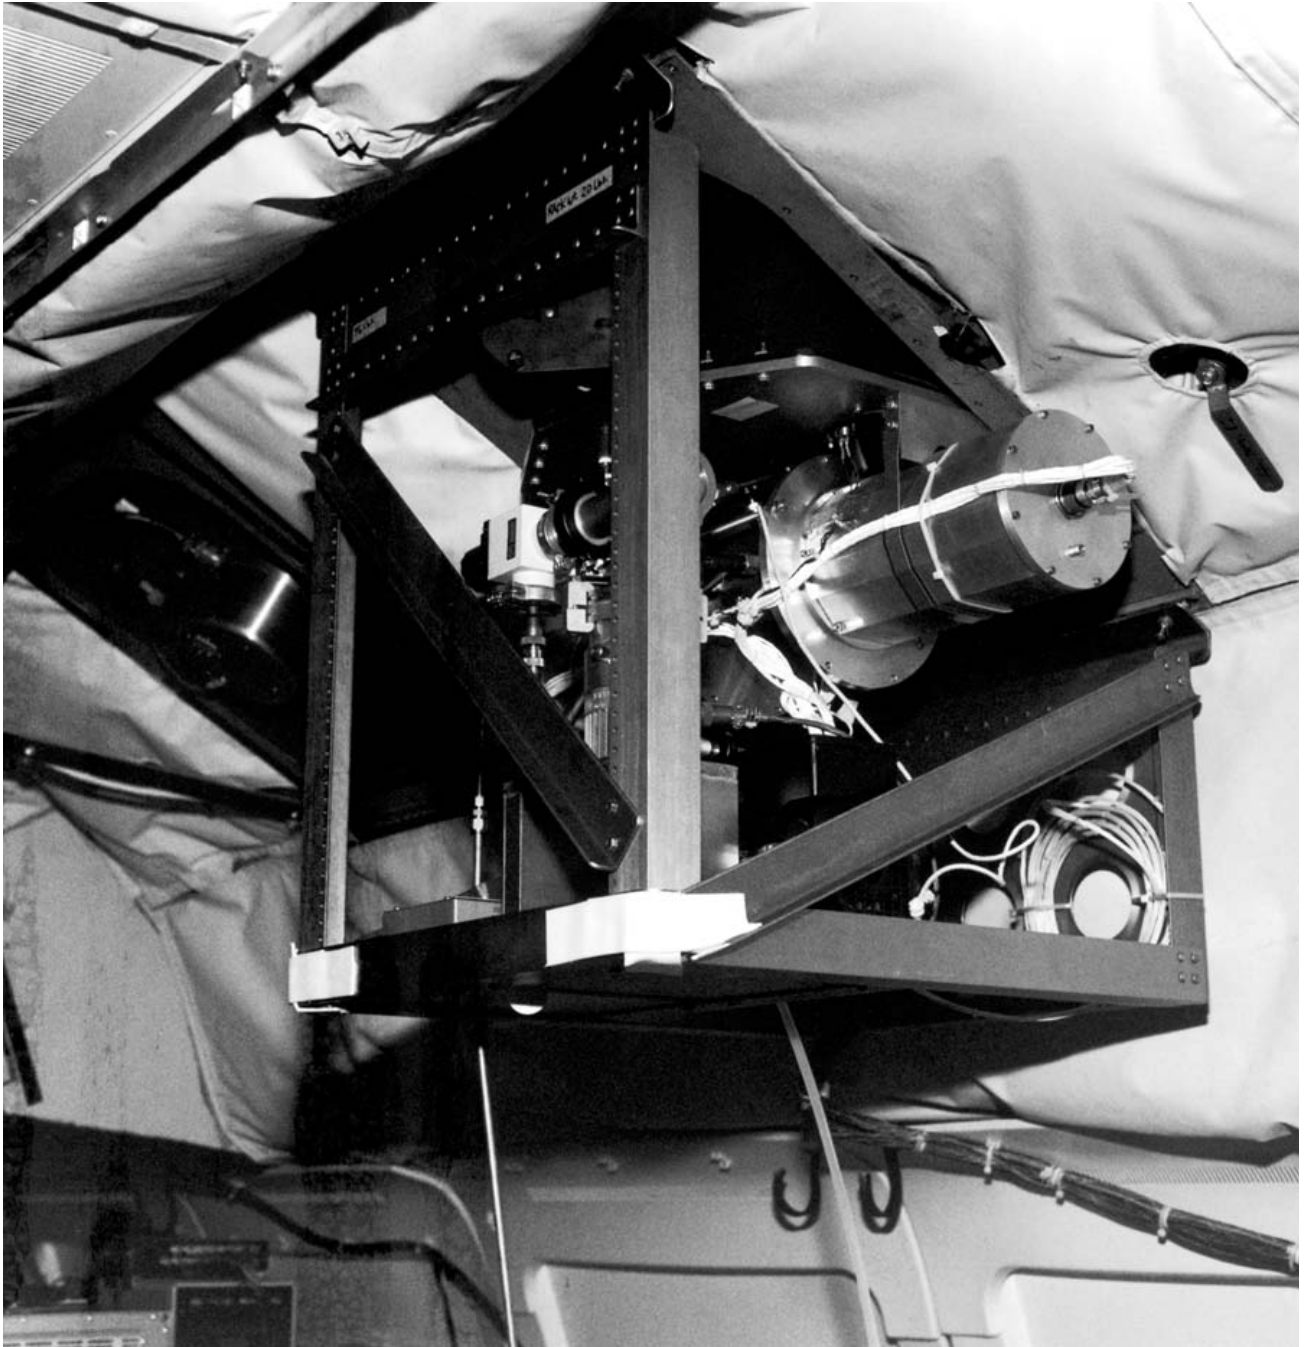


Figure 5-10. Typical equipment mounting techniques – 62° Viewport.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

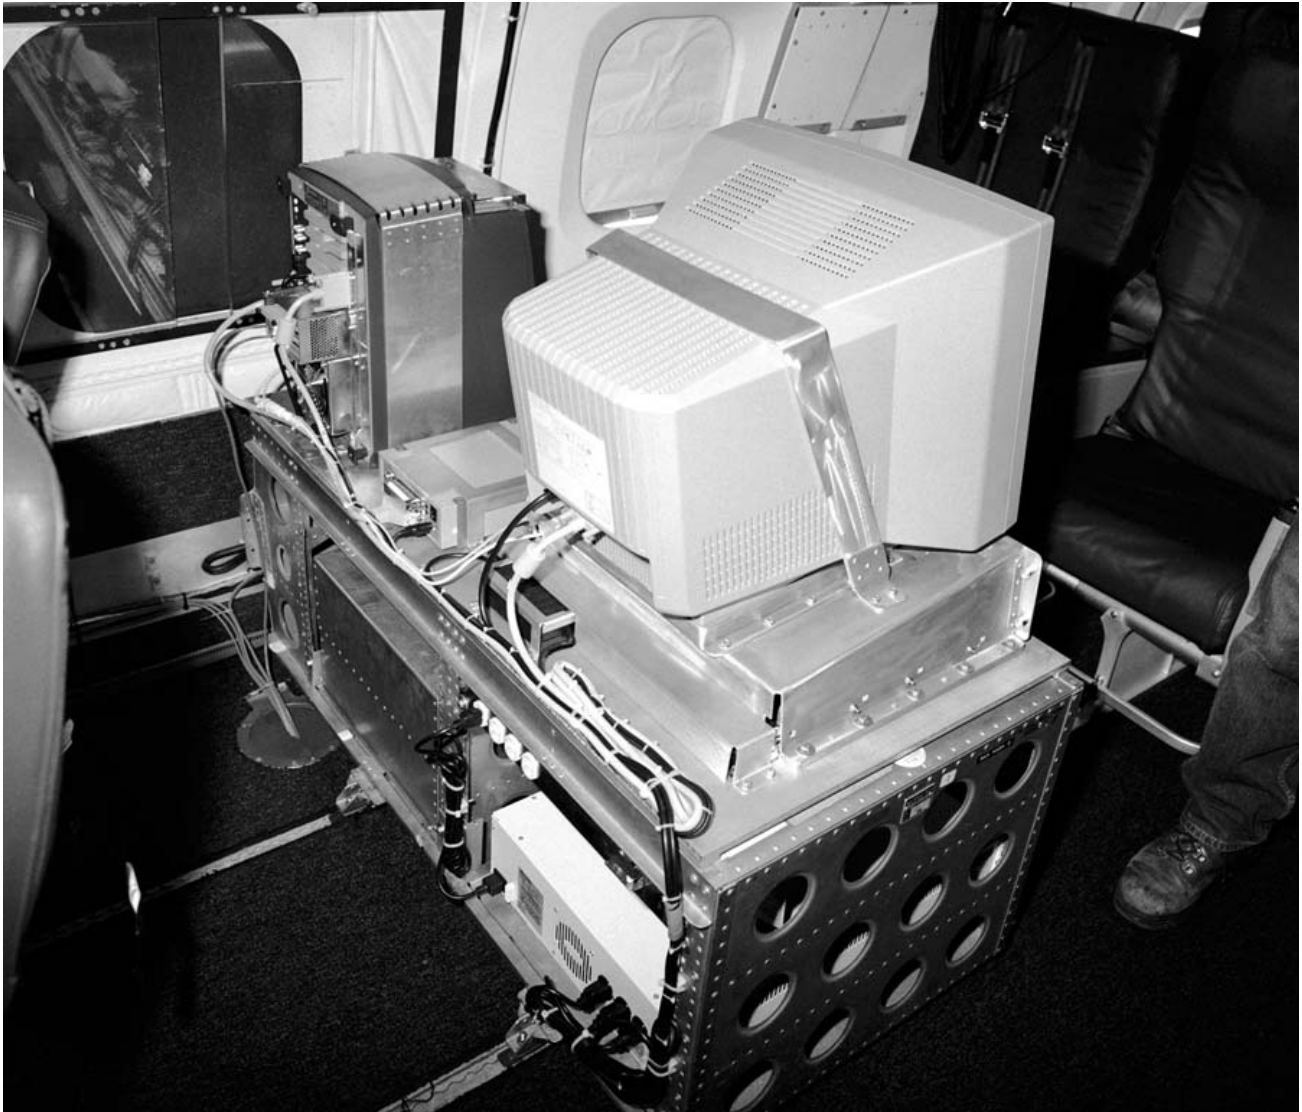


Figure 5-11. Typical equipment mounting techniques – low rack.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

NAS-type fasteners must be used throughout the rack assembly.
Contact DFRC for suggestions on mounting such equipment.

Certain types of equipment, due to size, shape, or orientation, cannot be mounted in the standard racks, and require special mounting arrangements. In all cases, including use of a standard equipment rack for supporting equipment, the experimenter should design, stress-analyze, and fabricate the entire structure. Where circumstances warrant, and within the limits of the available manpower, the mission manager can make arrangements for design and fabrication support, with the cost charged to the experimenter.

Generally, rack-top mounts use intermediate support plates, which attach to the equipment and span the top surface. These supports are then match-drilled to the existing fittings at the rack edges (figures 5-4 through 5-6).

All experimenters' equipment in the main cabin, except for small and light components attached to the viewport rails, must be supported by the seat tracks. Some examples of equipment mounting techniques are shown in figures 5-10 and 5-11.

For equipment that cannot be adapted to the standard rack support structure, two techniques are recommended:

- Equipment can be mounted on a framework that attaches directly to the seat rails. This method is especially applicable for equipment positioned for viewing or sampling through viewports (figure 5-12).
- An aluminum pallet can be attached to the seat rails and the equipment then mounted to the pallet. Equipment can also be bolted to the brackets restraining the pallet or attached to it by means of base-plates (figure 5-13).

NOTE: All non-standard mounting designs must be approved by NASA-DFRC engineering. Structural certifications and receiving inspections are required prior to installation and flight.

NOTE: Do not pre-drill equipment mounting holes prior to installation at DFRC. Nonstandard equipment will be match-drilled at installation to fit the seat rails.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK



Figure 5-12. Large experimenter equipment mounted on special framework.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

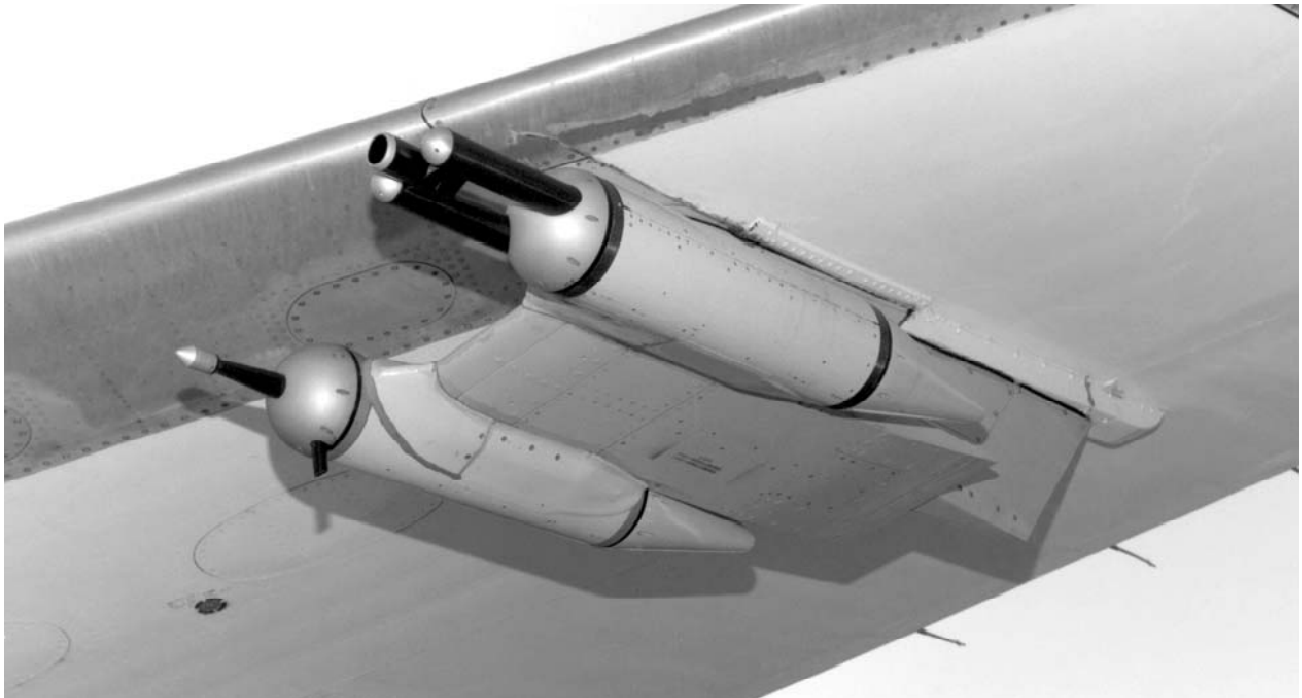


Figure 5-13. Large experimenter equipment mounted on special framework.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK




(1 of 2)



(2 of 2)

Figure 5-14(a). Typical wing tip pylon.


NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

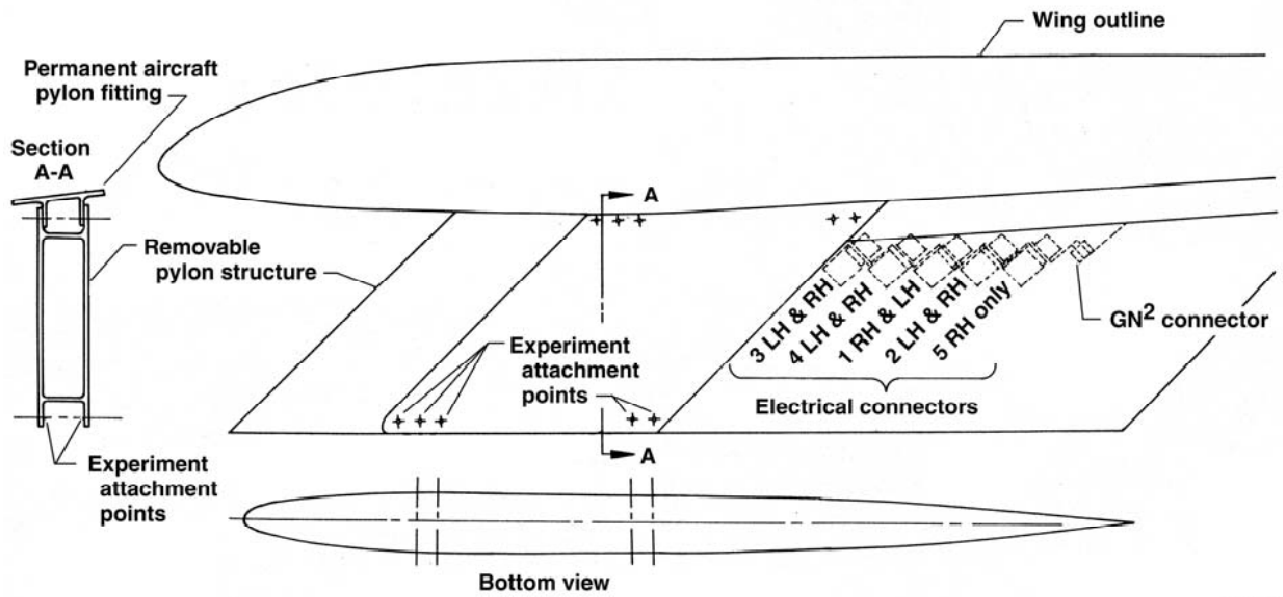

010240

Figure 5-14(b). Typical wing tip pylon.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

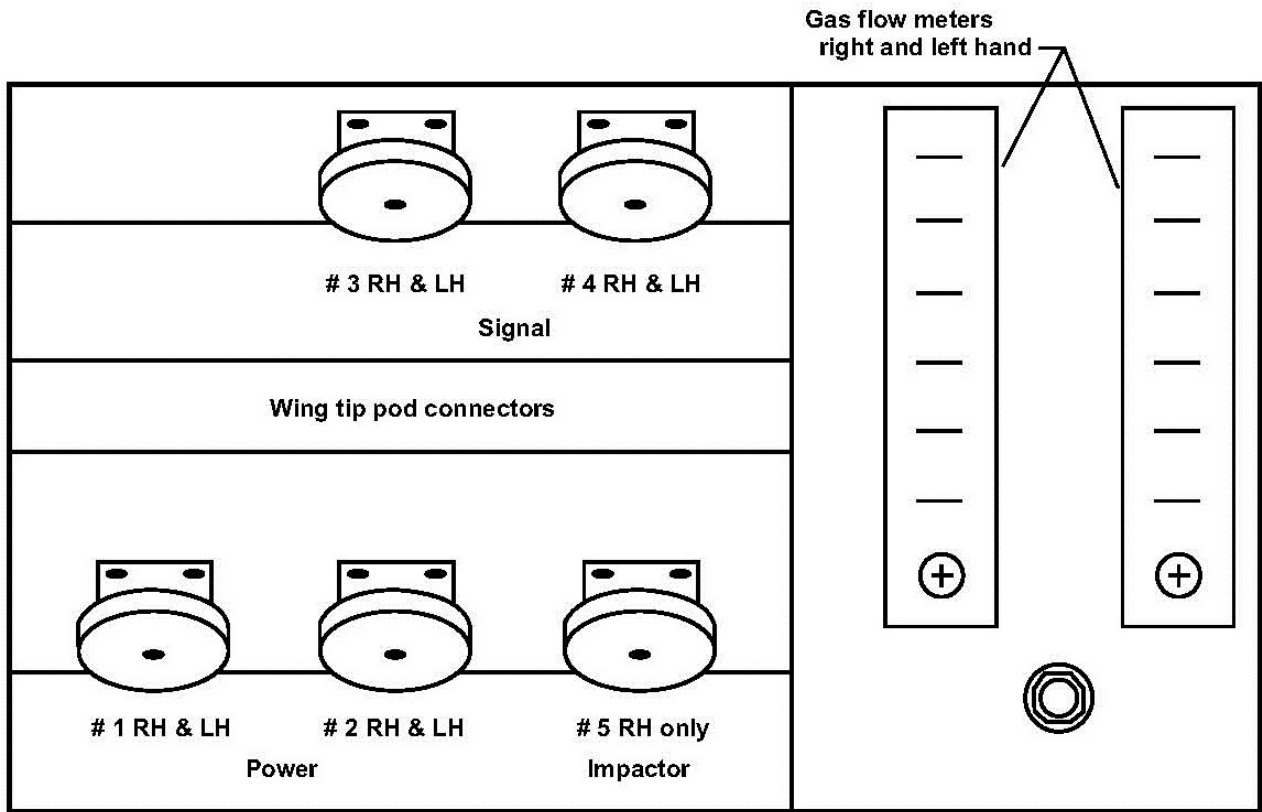

Wingtip pylon connector panel in main cabin – station 670

Cable Function	Number of Cables		Conductors Each cable	Wire Size	Max Current Amp	Resistance Ohm	Mating Connectors	
	Left Hand	Right Hand					Pylon end Part No.	Cabin end Part No.
Power	2	2	1 each twisted pair, shielded	12	20	0.19	MS24266R18-B8P or M83723/75R18-8PN	MS24266R18-B8S or M83723/75R18-8SN
			1 each twisted quad, shielded	14	15	0.30		
			1 each single, unshielded	14	15	0.30		
Signal	2	2	13 each twisted pair, shielded	22	5	1.60	MS3126F20-41P	MS3126F20-41S
Signal	0	1	10 each twisted triplet, shielded	22	5	1.60	MS3126F18-32P	MS3126F18-32S

Resistance is approximate for one-way.
Voltage at sensor will be voltage at cabin panel.
Minus the two times one-way drop.

Figure 5-15. Wing tip connector panel in main cabin – station 670.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

The DFRC Airborne Science Directorate has some special pallets and other supporting structures that were used in the past. These are available to experimenters who can adapt them to their use.

B. Cargo Compartments

Equipment mounted in the cargo compartments must be secured to the Brownline rails, cargo wall tie-downs, or available shelves.

C. Underwing Pylons

Certain types of equipment can be mounted under both left and right wingtips. Located there, are pylons designed for small sensors that must be far removed from fuselage air turbulence. The pylon's longitudinal centerline is parallel to the aircraft centerline and is set at zero angle-of-attack during normal flight.

Each pylon is designed to accommodate an equipment package with a maximum weight of 100 lb. See figure 5-14(a) and 5-14(b) for attachment details. Electrical power, signal, and nitrogen gas connections exist at each pylon and extend to a connector panel at station 670 on both left hand and right hand sides of the aircraft (see figure 5-15).

Experimenters desiring to utilize the wing-tip pylons should obtain approval from the DFRC Airborne Science Directorate well in advance to allow time for equipment mountings to be designed and fabricated. Flight tests may be required depending on actual equipment size, shape and weight.

All wing-mounted/pylon experimenter equipment must be grounded to the airframe. Resistance to ground checks will be performed. Equipment with greater than 1 Ohm resistance to ground will required additional grounding.

D. Exterior Locations

Equipment can be mounted on the exterior of the fuselage; however each request is considered individually. A long lead time must be allowed for the design of attachments and aerodynamic fairings that will support the gust loads and air loads encountered over the entire operating range of the aircraft.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

The design and fabrication of all external fairings is closely controlled by DFRC and, in most instances, that work is performed at DFRC. In-flight tests will be required to evaluate aircraft performance and the response of fairings to imposed air loads before the actual research flight series can begin. A safety factor of 2.25 must be used for exterior location designs, unless structural ultimate load testing has been accomplished.

8. Equipment Certification

It is the experimenters' responsibility to design and construct their research equipment in accordance with the general specifications herein. Problems should, of course, be discussed with DFRC personnel. Field measurements of the DC-8 by the experimenters are strongly recommended when new or modified installations involve tight tolerances to existing aircraft structure. If special requirements do arise, the mission manager can arrange for limited engineering design support at DFRC, provided he/she is notified well in advance.

Experimenters are required to submit detailed shop drawings of all equipment to be modified or fabricated, showing dimensions, materials, fastener types and patterns, and component weights, before initial approval for aircraft integration can be made. Stress calculations must accompany the drawings and include an analysis of the support and tie-down structure and fasteners. If the experimenter chooses not to use a standard DC-8 rack for equipment mounting, that structure must also be detailed in drawings and substantiated by analysis. The experimenter should also submit a functional block diagram of the experiment, and scaled and dimensioned layouts of equipment mounted in standard or experimenter supplied racks, with summaries of weights and moments (see sections 6 and 7). Photographs of existing equipment are very desirable.

All such data should be submitted prior to fabrication, and at least eight weeks prior to the scheduled installation of the equipment aboard the aircraft. The mission manager may specify a longer lead time in cases of complex installations.

This material will be evaluated at DFRC, and changes will be requested as necessary. Final approval should be obtained from DFRC, prior to shipping the equipment. The actual equipment construction, weight, center-of-mass, and resultant loading, are all verified at DFRC before final approval for installation is given. Experimenters should allow time for this verification when planning installation schedules.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

9. Hazardous Equipment And Materials Certification

WARNING: listed below are equipment and processes potentially hazardous to either personnel and/or equipment. Please read the following carefully.

The operation of any potentially hazardous equipment, or use of hazardous materials at DFRC, must be reviewed and approved by the appropriate DFRC safety personnel. This applies to the shipping, operational use, and disposal of all hazardous materials, including the operation of hazardous equipment in the Experiment Integration Facility, or on the aircraft, either in flight or on the ground. Sufficient lead-time must be allowed for the necessary reviews and obtaining the proper authorization. Depending upon the specifics of the experiment, this process can take as long as several months. To help identify potential hazards, which may require DFRC approval, the following equipment categorization is used.

A. Lasers

The use of lasers at DFRC and at DFRC controlled off-site operations is governed by Dryden Centerwide Procedure DCP-S-024, "Non-Ionizing Radiation Safety." This document must be reviewed and understood by those contemplating the installation of laser systems or the use of instruments containing lasers. Contact the mission manager for a current copy.

B. Radio Frequency and Microwave Emitters

The use of radio frequency (RF) and microwave emitters at DFRC and at DFRC controlled off-site operations is governed by Dryden Centerwide Procedure DCP-S-024, "Non-Ionizing Radiation Safety" and by Dryden Policy Directive DPD-2570.1, "Radio Frequency (RF) Spectrum Management." These documents must be reviewed and understood by those contemplating the installation of radio frequency or microwave emitters. Contact the mission manager for current copies.

Experimenters should engineer their equipment to prevent direct and spurious radiation from interfering with the aircraft avionics equipment, which may cover the frequency range of 10 kHz – 10 GHz or more (see chapter 2).

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

C. Cryogenics

Use of cryogenic liquids at DFRC is controlled by Dryden Centerwide Procedure DCP-S-039, "Cryogen Safety". Contact the mission manager for a current copy. Additional guidelines are contained in appendix B of this handbook. Cryogen usage is reviewed with respect to physiological, fire, explosion or other possible hazards associated with the use and/or transport aboard the aircraft. Type, volume, storage, and usage data is required by DFRC for all cryogenics. Some cryogenics are prohibited from use and/or transport due to exceptional hazards. These cryogenic liquids include:

- Oxygen
- Methane
- Ethylene
- Ethane
- Hydrogen

D. Compressed Gases

Use of compressed gases at DFRC is controlled by Dryden Centerwide Procedure DCP-S-030, "Pressure Vessels and Pressurized Systems". Contact the mission manager for a current copy. All compressed gases are reviewed, like cryogenics, with respect to physiological, fire, explosion or other possible hazards associated with their use and/or transport aboard the aircraft. If the particular gas is in the extremely hazardous category, or is used in sufficient quantity to be otherwise considered a high-risk item, special design and risk mitigation practices will be required.

E. Hazardous Materials

Hazardous material is defined as anything with a flashpoint below 140 °F or with a threshold limit value (TLV) below 500 ppm, below 500 mg/m³ for fumes, below 10 mg/m³ for dust, or with a single oral dose (if liquid) at 50 percent lethality below 500 mg/kg. Each installation is reviewed for potentially hazardous materials. A complete account must be made of all gases, and dry or liquid chemicals, toxic or otherwise. This includes all cleaning solvents, refrigerants and coolants, and instrument additives, such as butanol and laser dye.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

The use of toxic gases in the aircraft, during flight or ground operations, is of particular concern. Data on the instrument design, installation, and proposed use of the gases will be evaluated to determine the hazard level. Where it is determined that the use and/or transport of a gas presents an unacceptable risk, containment of that gas in a secondary containment vessel may be required.

Generally, secondary containment is required when full release and mixture of the gas into a 4 ft bubble (33.5 ft³) results in a concentration exceeding 50 percent of the amount known to be immediately dangerous to life and health (IDLH). Handling of hazardous materials at DFRC and at DFRC controlled off-site operations is governed by Dryden Centerwide Procedure DCP-S-038, "Hazard Communication and Material Safety Data Sheet (MSDS) Instruction Guide and Dictionary." Also see DCP-S-029, "Laboratory Safety." Contact the mission manager for current copies of both documents.

F. Batteries

While the proper use of small commercial grade batteries (such as AA, AAA, C, and D size Alkaline or Ni-Cd units) is normally acceptable for use on the DC-8, the use of large numbers of batteries or large capacity batteries, particularly lithium based, may present a significant hazard and therefore require DFRC review and approval. Special approval and operating procedures are required to allow unattended operation of any battery-powered equipment aboard the aircraft. See chapter 6 for additional detail and requirements regarding batteries and uninterruptible power systems (UPS).

G. Pressure Vessels/Systems

High pressure and vacuum systems (including research dewars) are reviewed to assess the hazards associated with failures. Use of these systems at DFRC is controlled by Dryden Centerwide Procedure DCP-S-030, "Pressure Vessels and Pressurized Systems." Contact the mission manager for a current copy.

H. Motors/Pumps

All electrical motors (except the very small fan units found in most commercial electronic equipment) and motor assemblies are reviewed for electrical safety and sparking potential (see chapter 6, section 8, for motor specifications).

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

I. Heaters

All heater assemblies are reviewed for electrical safety, proper circuit protection devices and the presence of high temperature exposed surfaces that might serve as ignition points for flammable gases, or hot surfaces that may cause burns to personnel. Exposed surfaces, which are above 130 °F, are generally considered safety problems and must have adequate shielding and caution signs (see chapter 6, section 9, for additional heater requirements).

J. Power Distribution Equipment

Power distribution equipment and large power conversion equipment require special DFRC approval. All non-DFRC ac power distribution boxes require inspection and approval for electrical safety. They should have hospital grade duplex outlets and an approved threewire (grounded) power cord.

K. Radioactive Materials

The use and/or transport of radioisotopes and/or radiation generating equipment involving the NASA DC-8 is controlled by Dryden Centerwide Procedure DCP-S-023, "Ionizing Radiation Safety." This document must be reviewed and understood by those contemplating the installation or transport of such systems containing radioactive materials. Contact the mission manager for a current copy.

L. Other Hazards

Each installation is reviewed for potentially hazardous ground or airborne operations. Use of PVC jacketed wire (except within commercial units) and cable or plumbing is not acceptable. Teflon based insulating materials should be used. The use of high power equipment, moving equipment, and/or optical windows will be reviewed. Also, the requirement to change gas cylinders in flight, purging and filling of highly flammable and/or toxic substances in an instrument, or other such items may be evaluated as high risk and require some level of risk mitigation.

For potential hazards external to the aircraft (such as laser beam, radio frequency, and microwave emissions), special approval may also be required from outside agencies, such as the military, FAA, state and local government agencies, and/or agencies in foreign

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

countries. This approval sequence can take several months and should begin well in advance of the proposed equipment installation date (a minimum four months lead-time is recommended)

**NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK**

CHAPTER 6

ELECTRICAL POWER

1. General Information

Aircraft electrical power is controlled and supplied to the experimenters by the mission director at his/her station (see figure 3-5). Outlet stations are spaced along both walls of the main cabin and in the cargo areas (see figure 3-1). The following two types of power are available:

- The 400 Hz ($\pm 1\%$), 115 volt ($\pm 1\%$), single-phase AC power, of which a nominal 40 kVA total is available.
- The 60 Hz ($\pm 0.1\%$), 115 volt ($\pm 1\%$), single-phase AC power, of which a nominal 40 kVA total is available.
- Limited 220 volt capability.

For 28 volt DC, power supplies operating from 400 Hz power are available on request. The regulation of these power supplies varies according to the type supplied. For safety considerations, acid type batteries with liquid electrolyte are not permitted on board. Other types of batteries can be used; however, they must be approved in advance by DFRC (see section 4). Recharging in flight is not permitted.

2. Power Sources and Frequency Converters

The basic power source within the aircraft, from the engine-powered generators, is 115/200 volt, three-phase, 400 Hz AC. The four engine generators are normally paralleled by a synchronizing bus, but in special cases they can be switched to operate independently. Both 115 volt, single-phase and 115/200 volt, three-phase 400 Hz power are available to experimenters. The ground return wire of the five-wire circuitry is tied to the aircraft structure (see section 6). It is recommended that 400 Hz be used to power experiments wherever equipment permits. Good regulation, excellent waveform, and low ripple are characteristic of this system.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

Fifteen 3.5 kVA solid-state converters in the forward cargo area, in five bundles of 3 converters each, provide 115 volt, 60 Hz power for experiments. The normal configuration limits the current from each bundle to a maximum of 60 A, or 6.90 kVA per each bundle. The ground return wire of three-wire circuitry is also tied to the aircraft structure. The system has good voltage regulation, excellent frequency stability, excellent transient regulation, and good waveform relative to commercial standards.

These solid-state converters have transient overload capacity up to 175 percent (10 sec) rated load for starting motors. This accommodates the use of devices with large inrush currents. However, vacuum pump motors, for example, should be limited to 1/2 hp (375 W) when possible.

Larger size motors require advance notice and special handling to avoid power outages. Experimenters must consult with the mission manager when motor loads are planned for 60 Hz power.

Normally, the central data system (ICATS) has priority power from one of the converter bundles; so less than full power is available to the experimenters.

NOTE: The 60 Hz system is not stable enough for precise timing requirements. Accurate time signals are available from the onboard timing system.

Equipment is not available to supply 50 Hz power on the aircraft. The experimenter needing this frequency in a critical application must provide the capacity. DFRC can provide a limited amount of 28-VDC power to drive a 50 Hz converter, if arrangements are made in advance.

3. Experimenters' Power Stations

Power outlet boxes (stations) are located along both walls of the main cabin (approximately 5 ft above the floor) and in both of the cargo areas (see figure 3-1). Each station is controlled locally by switch/circuit breakers (figure 6-1), with primary control from the mission director's distribution panels. A maximum of 20 amps of 60 Hz power and 20 amps per phase of 400 Hz power is available at any one station.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

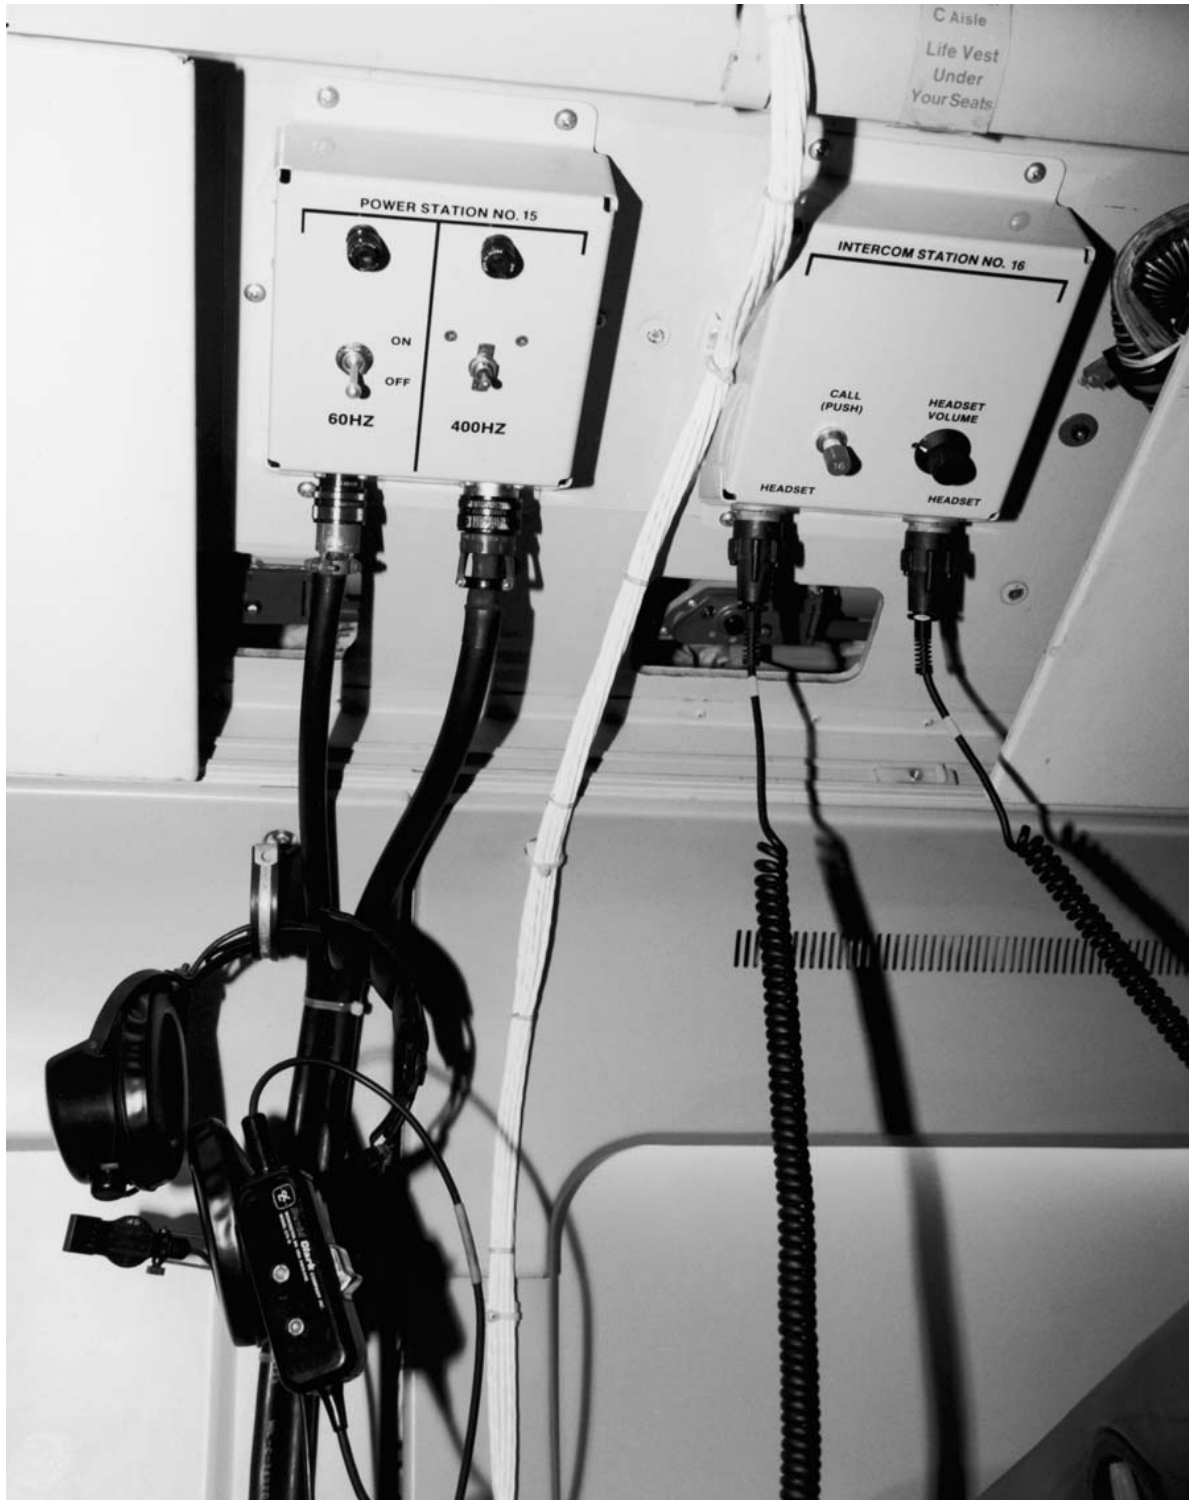


Figure 6-1. Typical power and intercom station in cabin.


NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

Power is connected from cabin wall stations to the experiment by DFRC-supplied cables that terminate in standard rack-mounted panels, 5 1/4 in. high, containing hospital-grade grounded receptacles. On the 60 Hz panels the receptacles are color-coded white and will accept a standard three-prong grounded plug (NEMA 5-15P or 5-20P). On the 400 Hz panels the receptacles are color-coded brown and will accept a three-prong grounded plug (NEMA 6-20P). Standard plugs for 60 and 400 Hz are not interchangeable, as shown in figure 6-2(a) and (b). Two-wire power leads and/or plugs are not allowed; adapters (from U.S. to European plugs) also cannot be used.


Rack panels are mounted with grounding prongs at the top. Additionally, there are special rack panels for 400 Hz, 200 volt, three-phase loads that require an eight-pin plug (MS24266R18B-8PN); DFRC can supply these on request. Rack panels are arranged as follows (see figure 6-2):

- A. For 60 Hz power, the white-colored receptacles can accommodate sixteen plugs, with a total load of 20 amps. The panel is provided with a single ground fault interrupter (GFI), which will trip off the entire panel for a ground leakage current of 5 mA.
- B. For 60 Hz power, a Pulizzi Engineering Inc. model TPC 12F-A2 power distribution panel is available as a supplement to the standard 60 Hz power panel or can be used standing alone. It can accommodate twelve plugs, with a total load of 20 amps and has EMI/RFI filtering and multi-stage spike and surge suppression.
- C. For 400 Hz power, the brown-colored, single-phase, 115 volt receptacles can accommodate sixteen plugs, with a total load of 20 amps per phase. All three phases are brought out to this panel with either four or six receptacles per phase. The mission director will control the phase use to keep the overall load as well balanced as possible.
- D. A special 400 Hz panel, also with brown-colored receptacles, can accommodate two plugs for each of the three phases, and four MS plugs for 200 volt, three-phase loads. The total panel load is 20 amps per phase. A composite power panel is used in the cargo areas. Six 60 Hz plugs can handle a total load of 20 amps; two have GFI protection. Four 400 Hz 115 volt plugs (all on one phase) are limited to a total of 20 amps. One 200 volt, three-phase MS plug can provide a maximum of 20 amps per phase, provided that the 115 volt single-phase receptacles are not in use. Experimenter supplied

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

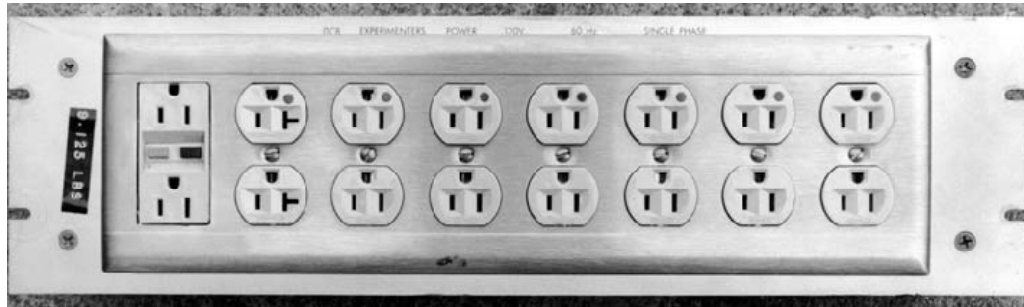

1 of 3 (60 Hz)

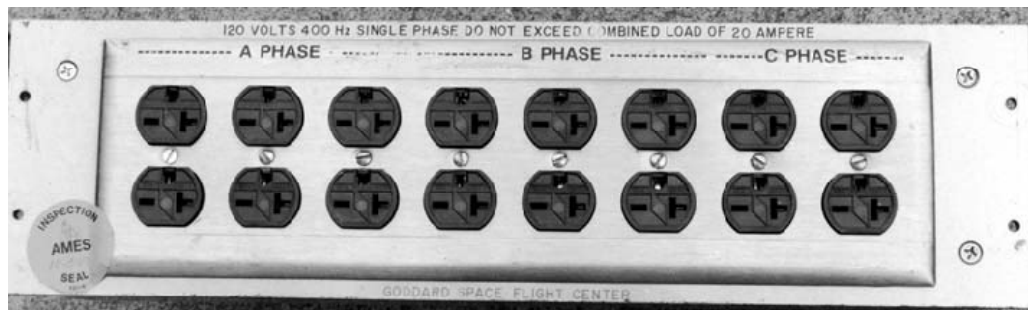

2 of 3 (400 Hz, single phase)




3 of 3 (400 Hz, 3-phase)

Figure 6-2(a). Typical rack power panel.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

power distribution equipment, such as outlet strips, which incorporate transient surge and noise suppressors, require special DFRC approval. Their use is limited to applications where they are plugged into the normal rack mounted DFRC power distribution boxes, or other approved aircraft duplex power outlets. Modifying or bypassing the grounding pin is not permitted.

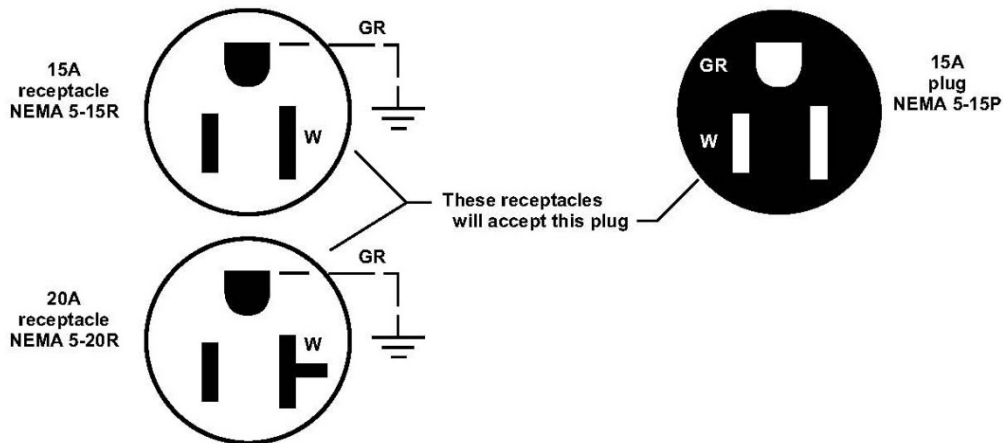

Note: All power cords for use with 400 Hz MUST be equipped with NEMA 6-20P plugs

Figure 6-2(b). Rack power panel receptacles.

4. Batteries

Small numbers of AA or D type alkaline or "button" Ni-Cd batteries can be used without special approval. All other battery usage on the aircraft requires approval of DFRC. Unless application absolutely requires otherwise, select benign battery chemistries with hermetically sealed cell designs from the following:

- Alkaline (Zn/MnO^2)
- Silver-Zinc
- Nickel Cadmium
- Sealed Lead Acid ("starved electrolyte" or "immobilized electrolyte" type)

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

The overall experiment design must consider battery assembly, shipment to the field, storage, packaging safety, shipping restrictions, shelf life limitations, and final disposal (some types require treatment as hazardous waste). Specific design guidelines are as follows:

- A. Use smallest size (minimum capacity) battery suitable for intended application, thus minimizing stored energy and electrolyte quantity.
- B. Battery installations must withstand normal aircraft structural loads, and safely contain battery failure modes. Typical failure modes include cell rupture or explosion and cell overheating.
- C. All batteries must be in secondary containment to prevent leakage of electrolyte onto the aircraft interior. Additionally, all liquid electrolyte batteries must be within sealed secondary containment and vented to the exterior of the aircraft to prevent toxic, corrosive, or oxidizing gases or fumes from entering the cabin. Sealed lead acid (SLA) batteries, for example, are exempt from sealed containment and venting; however, they must be mounted on a drip tray or in a housing sufficiently constructed to prevent leakage from escaping.
- D. Use a fuse or circuit breaker as close to the battery pack as possible.
- E. Minimize hazards due to cell failure through use of isolation and/or bypass diodes, thermal cutout switches, electrolyte resistant wire insulation, etc.
- F. Label battery housings with applicable safety warnings (such as corrosive/caustic liquid, flammable gas, high voltage or current capability).
- G. Unattended battery charging on the aircraft is not allowed. Battery must be isolated when not in use.

Battery approval is dependent upon the total aircraft mission configuration and assessed risk level for all potentially hazardous items on board. Approval will be for a particular mission series. Complete vendor battery specification and material safety data sheets must be submitted along with application information for DFRC review and approval action. Special approval will be required to allow unattended or overnight operation of battery-powered equipment in the aircraft.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

5. Uninterruptible Power Systems (UPS)

The structural integrity and circuitry guidelines in chapter 4 apply to UPS batteries. All units will be subjected to safety inspection and battery assembly procedures. The following specific requirements will be inspected:

- A. A front panel mounted switch or circuit breaker must provide complete battery isolation from UPS circuitry. It must be easily accessible and clearly marked "Battery Isolation."
- B. A Material Safety Data Sheet (MSDS) must be supplied for the battery.
- C. The battery must be a sealed lead acid (SLA) type, or other DFRC approved type, with immobilized electrolyte.
- D. All batteries must be in secondary containment to prevent leakage of electrolyte onto the aircraft interior. This is accomplished by mounting the battery or UPS on a drip tray or insuring that the battery housing, or UPS, is sufficiently constructed to prevent leakage from escaping.
- E. The battery assembly must be as supplied by the vendor and must have been installed by the vendor, or other qualified personnel. If the experimenter designs the battery assembly, it must be new (within 90 days) and installed at DFRC with an aircraft inspector witness. If the battery is of the type that requires periodic maintenance, adequate documentation must be presented that traces the last battery installation date and subsequent UPS use and maintenance history.
- F. If the battery was installed before arrival at DFRC, the unit will be subject to a "covers removed" inspection for general workmanship and compliance with wiring requirements, containment, and isolation systems.
- G. Along with an MSDS for the battery, a copy of the owner's manual for the UPS must be provided. Provide circuit schematics, if available.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

6. Aircraft Ground System (AGS)

The 400 Hz bus (in the forward cargo bay), and the 60 Hz bus (behind the mission director console), are grounded by being electrically strapped to the aircraft structure. All ground connections in experiment equipment must be made to the third wire of a 115-volt plug, or the fifth wire of a 400 Hz three-phase plug. These ground conductors then return to their own bus. All power neutral leads from 400-Hz or 60-Hz loads must be returned to the power system; they cannot be grounded.

Receptacle panels are also grounded at the receptacle and serve in turn to ground the individual racks. To assure good electrical contact between panel and racks, the contacting surfaces should be cleaned with a bond brush.

As previously stated, "...the GFI units are provided on both power systems". The 60-Hz power panels have a GFI unit incorporated into each panel. A ground current in excess of 5 mA will trip the panel's GFI, causing power disconnect from all receptacles on that panel. Experiment equipment with internal power grounds, resulting in ground currents exceeding the above, will activate the GFI to disconnect power. Should it be impractical to eliminate such internal power grounds, it may be necessary to supply an isolation transformer between the equipment and aircraft power.

7. Electromagnetic Interference (EMI)

The power grounding system described above minimizes the possibility of generating ground loops within the aircraft structure. Also, every effort is made, in ground testing before flights, to assure that there is no interference between experiments because of their electrical power characteristics. However, occasionally such interference may show up in flight. In such circumstances it may become necessary to rearrange power distribution to eliminate mutual interference. It is incumbent upon the experimenters to assure that their experiment equipment is not adversely affected by any minor voltage transients, and also to assure that operation of their equipment does not adversely affect the other experiments.

Experimenters are cautioned that transmitters on the aircraft may cause interference with their equipment. Refer to table 2-1 for a list of frequencies to be considered in experiment design. Conversely, experiment equipment must not interfere with aircraft receivers; outputs should be limited to 100 mW. Other factors relative to EMI and/or experiments follow:

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

- A. Power leads along both sides of the cabin are in close proximity to signal leads. Some physical separation can be arranged at installation, but shielding should be considered for critical cases.
- B. EMI measurements have shown that aircraft power is contaminated with broadband RF.
- C. High-impedance detector circuits are often subject to EMI, (unshielded detector leads may pick up noise from radio frequency fields within the aircraft).

8. Electrical Safety

Electrical safety procedures are governed by Dryden Centerwide Procedure DCP-S-025, "Lockout/Tagout"; and DCP-S-026, "Electrical Safety." These documents must be reviewed and understood by experimenters who bring their equipment to DFRC. Contact the mission manager for a current copy. Safe installation and operation of electrical equipment depends on observance of the following design considerations.

A. High Voltage Protection

Reduced atmospheric pressure increases the possibility of corona discharge and arcing between high voltage components and ground. High voltage leads should be sufficiently insulated to prevent flashover. Normal cabin pressure is equal to 7,500 ft (2.29 km), and break down distance, for a given voltage, is one-third greater than at sea level pressure. For equipment in pressure canisters that are open to the outside at 40,000 ft (12.2 km) altitude, the equivalent distance is greater by a factor of 3.5.

These conditions should guide equipment design with respect to lead separation, insulating high voltage components, avoiding sharp bends, solder peaks, and other rational practices. High voltage components and cables must be clearly marked and, where practical, electrical and mechanical interlocks should also be used. Contacts on terminals carrying fifty volts or more to the ground must have guards to prevent accidental contact by personnel.

B. Wire and Cable Insulating Materials

Polyvinyl Chloride (PVC) is a thermoplastic material composed of polymers of vinyl chloride. It is widely used for primary insulation or jacketing on a variety of wire and cable types. However, as attractive as it is as an insulating medium, it does possess properties that

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

make it hazardous for use in an airborne environment. When exposed to high temperatures, it has the unfortunate property of outgassing noxious/toxic products as well as heavy black smoke. For these reasons, wire and/or cable using PVC as the primary insulating material or jacket is not considered airworthy.

Electrical wire and cable used by experimenters, external to commercial manufactured components, should be clad with non-flammable or self-extinguishing insulation, with at least 150 °C rated outer insulation material. Some commonly encountered materials and their usability are listed in table 6-1.

NOTE: MIL-W-22759/11 or /16 wire is always acceptable.

Questions about material usage and acceptability should be directed to DFRC. Large volume and extended use of non-self-extinguishing insulation, in experiments to be flown on DFRC research aircraft will not be approved by the aircraft inspectors at time of installation.

Accessories such as identification sleeves, cable ties, chafe guards (spiral wrap), and cable clamps, should be of similar material. To avoid the time and cost of on-site cable replacement, suitable materials should be utilized to the fullest extent possible when assembling new components and their interconnecting cable assemblies. For those portions of experiments that have flown before, with cable assemblies that fail the above criteria, it is often acceptable to use a flame resistant outer sleeve.

Power cords that are attached to commercially procured equipment should also have other than PVC jackets. UL Type SO (neoprene jacketed, 600 volt / 90 °C) is recommended, is readily available, and is usually accepted for this application despite a lower temperature rating. Exceptions to this guideline may require special treatment.

C. Electric Motors

The use of electric motors aboard the aircraft requires individual approval by DFRC. Preferred are 400 Hz motors, to avoid starting transients on 60 Hz converters. Larger motors (such as those used in vacuum pumps) must be protected by thermal overload devices. In addition, single-phase motors must be equipped with solid-state switches to inhibit arcing at the contacts during start-up. In the absence of arc-suppressors, motors must be spark free during operation. Motors rated explosion-proof or totally enclosed non-ventilated

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

Table 6-1. Commonly encountered wire/cable insulation materials.

Fluorocarbons	Max. Operating Temp °C (nominal)
☐ Teflon TFE (tetrafluorethylene)	+260
○ Teflon PFA (perfluoroalkoxy)	+250
○ Teflon FEP (fluorinated ethylene propylene)	+200
○ Teflon PTFE (polytetrafluorethylene)	+150
○ Tefzel EFTE (ethelene & tetrafluorethylene)	+150
○ Halar ECTFE (ethylene & monochlorotrifluorethylene)	+150
○ Kynar PVDF (homopolymer of vinylidene fluoride)	+135
○ Silicon, Rubber (Good low-temperature flexibility at -90 °C)	+200
○ Polysulfone	+130
○ Hypalon CSPE (chlorosulfonated polyethylene)	+90
○ Neoprene (polychloroprene)	+90
○ Natural Rubber (NR isoprene)	+70
■ Kapton (polymide resin)	+200
● Polyester	+150
● Nylon (polymide polymer)	+105
● Polyvinyl Chloride (PVC)	+80 to +105
● Polyethylene (PE)	+80 to +105
● Polypropylene	+90
● Polyurethane	+80

☐ = TFE is recommended as the preferred wire insulation for general use in DFRC aircraft. Proper installation procedures are credited with avoidance of problems, related to cut-through resistance and cold-flow properties. Some MIL-W-81044, MIL-W-81381, and MIL-W-16878 wire is acceptable in certain applications, but DFRC approval should be obtained prior to final product specification to ensure proper airworthiness standards are met.

○ = Acceptable Materials.

■ = Kapton insulated wire (MIL-W-81381 or equivalent) has had a number of reported incidents of short circuit arc tracking (flashover) which resulted in severe propagating destruction of wire bundles in military and aerospace hardware. The use of Kapton insulated wire should be avoided. Contact DFRC for additional guidelines and usage criteria.

● = These materials are not normally acceptable due to flammability and/or toxic pyrolysis products. Contact DFRC for additional guidelines and usage criteria.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

motors are recommended. However, many fractional horsepower AC permanent split-capacitor motors are acceptable depending upon application and location. Large DC brush type motors are generally not acceptable due to the electrical arcing at the brushes. Early consultations with DFRC will help avoid problems at installation.

9. Heaters

All heater assemblies are reviewed for electrical safety, proper circuit protection devices, and the presence of high temperature exposed surfaces that might serve as ignition points for flammable gases, or cause injury to personnel. The following must be supplied to DFRC for review:

- A. A simple electrical schematic must be provided for each heater. The schematic must show the heater, the temperature controller, fuses or circuit breakers, the power supply, and the wire size between these components. A thermal fuse is recommended between the controller and the heater for added protection.
- B. Provide product literature for the components of the assembly (heater, controller, temperature sensor, etc.).
- C. Provide a description of the location and function of the heaters. A sketch showing the location of the heaters in relation to instruments and/or probes is most helpful.

CAUTION: Exposed surfaces above 130 °F (54 °C) are generally considered safety problems, and must have adequate shielding and caution signs.

10. Experiment Cabling

Generally, DFRC provides all cabling to the experiment from the power outlet boxes and the central computer (ICATS); the experimenter provides matching connectors. The experimenters are responsible for the cabling between two or more racks of their own equipment. These cables must be routed off the floor to permit free access between racks. Cables that connect racks on opposite sides of the aisle, are routed overhead in metal trays; 22 ft should be allowed for the overhead run.

All cabling inside of the racks must be clamped to inhibit movement, utilizing existing holes and/or openings.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

11. Equipment Certification

Experimenters are responsible for the design and assembly of electrical systems in accordance with these specifications. They are requested to submit to DFRC a power break down (such as 60 Hz, 400 Hz, singlephase, three-phase) by component, for each standard rack, and any other installations elsewhere in the cabin or cargo areas.

Additionally, information should be provided about all electric motors in the experiment, to include type, starting (inrush) current magnitude/time scale, and thermal overload protection. This information should be submitted along with all the mechanical design specifications at least eight weeks prior to installation.

DFRC will review the material, request changes as needed, and prepare a power distribution plan for all the experiments in the payload. Final verification of electrical systems will be made at DFRC, prior to approval for installation on the aircraft.

**NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK**

CHAPTER 7

DATA DISTRIBUTION SYSTEM

1. General Information

The DC-8 onboard data system is responsible for interfacing to avionics, facility instrumentation and experimenter equipment, recording selected data and retransmitting it to facilitate instrument operation and the creation of real-time situational awareness displays, both on the aircraft and on the ground.

The resulting data is made available on the World Wide Web with a secure permission based remote login.

2. REVEAL/NASDAT System

The NASDAT system records data from aircraft systems, facility information and experimenter equipment. This data is then aggregated into standardized formats, recorded for post flight experimenter usage and rebroadcast in real time on network and satellite communications channels for ingest and usage by instruments and situational awareness tools.

By default the inter-agency IWG1 standard packet is provided in real time and recorded, along with a 7-line DC-8 legacy format for instruments that were designed to work with the DADS and ICATS systems. Both packet formats are detailed in Appendix D. Real time data is available via UDP Broadcast over Ethernet, or via RS-232 for legacy instruments. Additional formats are available upon request, including NMEA formatted position data. Additional parameters may be recorded on a per mission basis.

3. On-board Ethernet network

The DC-8 provides housekeeping data, inter-instrument communication and network services via an industry-standard gigabit ethernet network. Network and timecode access points are spread throughout the cabin, with 11 available throughout the back of the DC-8 cabin for experimenter use, with additional access points at the housekeeping rack and in the cockpit. Each network access point provides 8 ethernet ports. If additional ports are required, 4 port rack-mount switches are available. These switches derive their power from the aircraft network and do not require any additional power. Experiments providing their own router or switch to attach to the aircraft network should consult with the DC-8 Network Engineer, as these devices sometimes require special accommodation.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

DHCP IP addresses are available on the network for laptops and non-critical systems. Instruments which require IP connectivity for the reception or transmission of housekeeping data will be issued static IP assignments by the DC-8 Network Engineer. These assignments are valid for the mission for which they are issued.

In addition to the distribution of housekeeping data and provision of network services throughout the cabin, the aircraft network is also available for use by the experimenters for general data transmission usage. If isolated segments are required within the cabin, private VLANs can be established.

4. Network Services

The DC-8 Provides an extensive set of on-board network services, including:

- File Shares.
- Web Display Application (ASDE).
- NTP
- xChat
- Data Feeds
- Network Printer/Scanner

5. The Airborne Science Data Environment (ASDE)

The Airborne Science Data Environment provides both a set of configurable situational awareness displays and an API for programs to query flight data.

A. Web-based Displays

The DC-8 has a set of configurable web-base situational awareness displays. These displays provide a fusion of housekeeping data with experimenter data and outside sources such as satellite and ground station data. These displays are available to all experimenters and flight crew, providing a common framework for distributing situational awareness and quick look data in real time. They can be viewed on any computer running the firefox web browser, or through rack-mount touchscreen displays available to DC-8 experimenters.

Standard displays include:

- Tabular displays of Aircraft and Experimenter provided data.
- Time Series Strip Charts
- Forward and Nadir Camera Imagery
- Google Earth flight tracking and satellite data display
- Falcon view flight tracking
- The Mission Director's log
- Video Feeds from experimenter equipment.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

Data Ingest can be accomplished through a wide variety of channels, including VGA or NTSC Video feeds, RS-232, Analog input lines, UDP packets over Ethernet and periodic posting of data to on-board file shares. If you wish to display data on the DC-8 web displays

B. API

The ASDE stores all received parameter information in a GIS enabled postgres database. This data is available to experimenter software and systems through a web-based API, in addition to the real-time broadcasts on the on-board network.

6. Timing Services

The DC-8 Housekeeping system includes two redundant Symmetricom S250 time servers, which derive their time signal from GPS with 50ns accuracy. In the standard configuration, these devices provide 2 redundant channels IRIG-B AM and NTP to each of the network access points throughout the aircraft. Redundant IRIG-B channels are switched automatically in the event of a failure of the timeserver.

If required, some of the channels can be switched to a 1 PPS signal, with NMEA data for timing provided via the NASDAT and the onboard network.

7. Video

The DC-8 features forward and nadir looking Axis 223M Network Cameras. The video from the cameras is available in real-time on the network, either directly from the cameras or via the display system, in either MJPEG or MPEG4 format. The maximum resolution of these cameras is 1600x1200 at 10hz. Higher framerates are available at lower resolutions.

Video of the cockpit multifunction display is available at 640x480 to capture the output of the Collins weather radar.

Forward, nadir and weather radar video is recorded at between 1 and 10 hz, with the resulting 15 minute segments being made available during the campaign and archived in the DC-8 data housekeeping archive.

In addition, there is one Axis 221 network camera operating in each of the aircraft cargo pits. These cameras are present for the safety of personnel working in the pits during flight. This video is not recorded.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

8. Touch Screen Displays

Rack-top and in rack touchscreen displays are available for mounting on experimenter racks. These displays feature a 12.1" screen, and 1024x768 screen resolution. They provide a simple means of accessing the on-board display system.

9. Satellite Communication

The DC-8 features two systems for transmitting data to and from the aircraft in real time. Iridium provides a very low bandwidth system with real-time coverage. INMARSAT provides a high-bandwidth solution that does not function at the poles.

A. Iridium Communication

The DC-8 Iridium communication system bonds between 4 and 6 NAL Research 9601 modems together to provide a combined bandwidth of 9.6kbps. This allows for limited communication of data from the aircraft to the ground. In the standard configuration, this channel is used to bring in weather data, provide the xChat facility and transmit limited telemetry and flight track information to the ground in real time.

Iridium use can result in interference with some GPS receiver and antenna combinations. Additional filtering may be required in this instance.

Satellite coverage for this facility is world-wide.

B. INMARSAT Communication

The DC-8 is equipped with a dual-channel BGAN Inmarsat which provides high-bandwidth data connectivity between roughly 70N and 70S. The system is capable of providing a wide array of data and telephony services, including support for guaranteed and non-guaranteed bandwidth internet access, POTS telephone and ISDN Services. Maximum bandwidth is 432kbps, per channel. Maximum guaranteed bandwidth is 256kbps.

10. xChat/IRC Communication

The DC-8 provides a text based chat service using the Internet Relay Chat (IRC) communication system. Communications are routed through UCAR, allowing communication to personnel on the ground and on other NASA, NCAR and NOAA aircraft using the same system.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

11. Aircraft Flight Tracking

The DC-8 data system provides on-board and on-the-ground tracking of the aircraft during all science activities via a Google Earth KML file. At the start of each mission, a KML file will be distributed with the current flight tracking capability and any other relevant mission-specific data, such as upcoming flight plans and target sites. This KML file be updated after each flight with the new flight path.

12. Handling of Parameter Data

Parameter data, including the DC-8 Housekeeping data is gathered by the NASDAT system, recorded and rebroadcast to the aircraft in the IWG1 and legacy DC8 DADS format. These formats are documented in Appendix D. Other data rates and formats such as NMEA are available upon request. This data is also transmitted to the ground in real-time at a reduced rate.

Post-flight, recordings of the parameter data will be made immediately available to experimenters, along with a KML flight track of the current flight in the DC-8 data archive. The raw data will be made available via onboard file sharing services, and an on-line archive site. If local internet connectivity is poor, an on-site server will also be provided. Quality controlled versions of the data will be posted as quickly as circumstances allow.

Please contact the DC-8 Network Engineer for mission-specific archive details.

13. Recording of Data

Several technologies are available for collecting payload data for on-board display and retransmission.

A. UDP Packet Broadcast

The preferred means of contributing parameter series data for display on the DC-8 and for retransmission is to broadcast each data point as a UDP packet on the onboard network. The preferred packet format can be found in Appendix D.

B. Analog Input

The DC-8 data system has several network-enabled Perle IOLAN DS1 Analog-to-Digital converters available. The converters will accept up to 4 analog outputs from an instrument, and transmit the measured voltages to the DC-8 onboard network.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

C. Video Input

Video data, including camera outputs and instrument quick-look displays can be ingested, converted to digital formats and distributed to the aircraft and transmitted to the ground, bandwidth permitting. Output formats including VGA, NTSC and DVI can be accommodated using existing equipment. Other formats may require the purchase of additional equipment.

D. File Handling

Larger amounts of data such as quick look images and dropsonde files can be accepted via standard file sharing protocols. These files can then be made available to the cabin, processed for display or transmitted to the ground.

**NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK**

CHAPTER 8

FACILITY INSTRUMENTATION

1. General Information

A variety of systems are available to acquire aircraft flight parameters and related environmental data in support of the research activities. Many of these systems are standard on-board facilities; others can be provided on request. Outputs vary from real-time electrical signals distributed to experiments to post-mission copies of recorded data available for download, as outlined in the following section.

2. Standard Aircraft Systems

Data acquisition systems listed in Table 8–1 is standard to the aircraft. Output signals available to experimenters are listed below.

Table 8-1: Standard Aircraft Outputs Available on ASDE

System	Output Data
Dual Inertial Navigation Systems (INS)	Pitch, Roll
	Drift Angle
	Latitude, Longitude ¹
	Ground Speed ²
	True Heading ³
	Wind Vector ⁴
	Distance to Go ⁵
	Time to Go ⁶
	Cross Track Distance ⁷
	Course (Desired Track) ⁸
	Track Angle ⁹
Track Error ¹⁰	
Align Status ¹¹	
Global Positioning System (GPS)	Produces items 1 through 11 listed for the Inertial Navigation Systems above
Total Air Temperature Probe	Total Air Temperature
Dew/Frost Hygrometer	Prevailing Ambient Dew Point or Frost Point
Surface Temperature Radiometer	Surface or Cloud-top Temperature

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

System	Output Data
Radar Altimeter	Absolute Altitude Above Land or Water
Central Air Data Computer (Flight Instruments)	Pressure Altitude, True Airspeed, Mach Number, Static Air Temperature, Vertical Velocity
Cabin Pressure Transducer	Cabin Pressure
Accurate GPS-synced Time Code	IRIG-B and Network Time Protocol (NTP)

A. Inertial Navigation System (INS)

The Delco Carousel IVA-3 Inertial Navigation System operates by sensing aircraft accelerations from a gyro-stabilized, four-gimbal, all-attitude platform. Dual two-degree-of-freedom gyros featuring self-generating gas bearings, have very low drift characteristics and excellent turn-on repeatability. A general purpose, microelectronic digital computer is part of the system. Output functions include position information, course-line computation, steering commands, and angular pitch/roll/heading information. The system also accepts a true airspeed signal that is used to compute wind speed and direction. The full data stream, in binary coded decimal (BCD) format, is output to a remote display unit at the mission director's console and to the NASDAT data acquisition system. In turn, the NASDAT converts the data stream into separate parameters for recording and display over the on-board experimenter data system network.

B. Flight Management System (FMS)

The Universal Avionics FMS-1F Flight Management System is a fully integrated navigation management system designed to provide the pilot with centralized control of the aircraft's navigation sensors and computer based flight planning. The FMS accepts primary position information from short and long-range navigation sensors. Inputs from DME, VOR, TACAN, and GPS can be utilized to determine the aircraft's position. In addition to the navigational inputs, the system also receives true airspeed and altitude information from the air data computer and heading reference from the INS. The primary position data received from the sensor is filtered within the FMS to derive a "best computed position" (BCP). Using the BCP, the FMS navigates the aircraft along the programmed flight path.

C. Global Positioning System (GPS)

The global positioning system is a system whereby GPS satellites transmit highly monitored position and timing data allowing a receiver to precisely determine its range to the transmitting satellite. By observing multiple

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

satellites, the receiver can accurately determine and track its position in longitude, latitude, and altitude allowing precision point-to-point navigation to be performed. The DoD World Geodetic System of 1984 (WGS-84) is the convention used for all positioning and navigation purposes.

D. Weather Radar System

A Collins WXR-700C horizontal scanning, two-axis, gyro-stabilized C-band radar antenna is located in the nose of the aircraft. Color images are displayed on a multi-function display (MFD) that is also used to display the aircraft's flight instrument system. The MFD is displayed throughout the cabin via digital video streamed over the onboard experimenter data system network.

E. Total Air Temperature System (TAT)

The DC-8 has two Total Air Temperature (TAT) systems. The Rosemount 102 AH2AG is an aircraft instrument which sends data to the Central Air Data Computer (CADC) to compute true air speed (TAS). The second is a Rosemount 102 E4AL which is not part of aircraft flight critical hardware, but for experimenter use. Both are recorded using the NASDAT data acquisition system and Total Air Temperature is displayed over the on-board experimenter data system network.

The Rosemount 102 AH2AG TAT system features an accurate, quick response probe that measures the total temperature of air outside the aircraft, using a platinum-resistance sensing element. The TAT sensing range is from -65 to $+35$ °C with an accuracy of ± 1 °C.

The experimenter TAT system is a Rosemount 102 E4AL, which is similar to the aircraft TAT probe. The main difference is the Rosemount 102E4AL is not heated and has a faster response time. This total air temperature sensor can measure temperature between -70 °C to $+70$ °C with a speed of up to Mach 3 at altitudes between 0 to 100,000 feet. The accuracy of the total air temperature is ± 1.0466 degrees Celsius.

F. Dew/Frost Point Hygrometers

The DC-8 currently two Hygrometers, a two-stage Buck Research 1011B Hygrometer system and a three-stage Edgetech Vigilant Model 137.

The Buck Research Hygrometer system is a chilled-mirror type hygrometer designed for airborne measurements of dew and frost point temperatures. It is capable of measuring dew/frost points between -75 °C and $+50$ °C, over

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

a wide range of temperatures, pressures, and airspeeds. The accuracy of this system is $\pm 0.1^{\circ}$ C over the entire range. Response time of the hygrometer systems is about 1° C per second; and has decreasing response and depression capabilities as temperatures drop below -60° C. A visual readout unit is located at the mission director's console.

The Edgetech Model 137 Hygrometer is a rugged, shock mounted instrument used for dew point measurement. This model does not measure frost point; temperatures below 0 degrees Celsius are measured as dew points. The dew point is measured using chill mirror technology assuring precision accuracy, repeatability and reliability.

The Edgetech hygrometer is able to accurately detect the dew point within the range of -50° C to 90° C with an accuracy of $\pm 0.2^{\circ}$ C and precision of 0.1° C. The sensor is capable of a 65° C depression from an ambient temperature of 25° C. A visual readout unit is located in the housekeeping rack.

Both the Buck Research and Edgetech hygrometers send analog signals to the NASDAT data acquisition system for recording and display over the on-board experimenter network.

G. Surface Temperature Radiometer

The Heitronics Infrared Radiation Pyrometer KT-19.85II is a remotely sensed measuring transducer, which receives the infrared radiation emitted by the measuring object itself and transforms it into a standardized output signal. The pyrometer is located on the bottom of the aircraft to measure surface and cloud top temperatures. It has a spectral range of 9.6 – 11.5 μ m, a response time of 1 second, and a temperature range of -100° C - 200° C. The accuracy is $\pm 0.5\%$ plus 0.7% of the difference between target temperature and housing temperature. An analog signal is sent to the NASDAT data acquisition system for recording and display over the on-board experimenter data system network.

H. Radar Altimeter

A NavCom Defense Electronics APN-232 combined altitude radar altimeter determines the aircraft's altitude above land or water (0 to 65,000 ft) by means of reflected, sub-microsecond radio signal pulses between 4.2 to 4.4 GHz. The specified accuracy ranges between $\pm 1-2\%$, depending on altitude and whether the digital or analog output is being used. A visual readout unit is located at the mission director's console, and signals are sent to the NASDAT data acquisition system for recording and display over the on-board experimenter data system network.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

I. Aircraft Flight Instruments

The outputs from various flight instruments can be made available to experiments. Ordinarily, the instrument signals are processed by the CADC and sent to the NASDAT data acquisition system for recording and display over the onboard experimenter data system network. The available parameters from the CADC are listed in Appendix D.

J. Cabin Pressure

The MKS Baraton Pressure Transducer is used to measure the pressure within the cabin of the aircraft. Based on a reference pressure which remains constant within the instrument, the exterior pressure can then be measured. The pressure transducer has a resolution of 0.1 Torr and the accuracy is $\pm 0.15\%$ of Reading \pm temperature coefficient. The temperature coefficient is 0.02% of Reading/ $^{\circ}\text{C}$. An analog signal is sent to the NASDAT data acquisition system for recording and display over the on-board experimenter data system network.

K. GPS-Synchronized Time Code

Accurate GPS-synchronized time code is generated by a pair of redundant Symmetricom SyncServer S250 time servers. These time servers produce accurate time available in two forms for distribution: IRIG-B and Network Time Protocol (NTP). The IRIG-B signal is transmitted throughout the aircraft on a dedicated coaxial cable network and maintains accuracy within 10ms. NTP is broadcast over the on-board experimenter data system network and maintains client time synchronization accuracy to 0.5-2ms.

3. AIMMS-20

The AIMMS-20 is a system designed for producing three-dimensional airborne wind measurements. It consists of four modules located in the housekeeping rack along with an air data probe located on the wing tip. The modules and air data probe communicate at an extremely high rate via digital serial bus or CAN (Controller Area Network) bus to accurately measure airborne winds, position, and attitude data.

A. Modules

The AIMMS-20 system consists of four modules. Two of these modules, GPS and Inertial Measurement modules, are responsible for acquiring a particular set of airborne measurements. In addition, a central processing module is in place for evaluating the wind solution,

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

and a digital input/output module for recording the data.

The GPS Module utilizes a two antenna, dual GPS processor system to determine aircraft attitude and position. Using two GPS antennas allows the unit to create a differential GPS inside the system to get the best GPS solution more accurately.

The Inertial Measurement Unit (IMU) module is a full six-degree of freedom IMU containing three rate gyros and three accelerometers. Angular rates and accelerations are broadcast 40 times per second in order to precisely track the dynamics of the aircraft attitude over the complete flight envelope.

The Central Processing Module (CPM) uses a sophisticated Kalman Filter Digital Signal Processing Technique. The CPM module combines the dual GPS carrier-phase data with the inertial data to determine accurate aircraft attitude of up to 0.1 degrees. This, in turn, is combined with the air-motion data from the wing tip probe to determine the wind solution to better than 0.5 m/s accuracy.

The Digital Input/Output (DIO) module takes the digital CAN Bus signal from the Central Processing Module and records it onto an external FLASH device. Data is recorded in both raw binary and real time ASCII files.

The Air Data Probe accurately measures the three-dimensional, aircraft-relative flow vector (true airspeed, angle-of attack and sideslip), temperature, and relative humidity. In addition, an accelerometer is placed on each of the three axis to measure direct turbulence.

The parameters recorded by the AIMMS-20 are shown in table 8.2.

Table 8.2: AIMMS-20 ASCII Parameters

Parameter	Units	Accuracy	Resolution	Frequency
Time	UTC Decimal Hours	1 ms	36 ms	Up to 20 Hertz
Static Temperature	Celcius	0.2 °C	0.01 °C	Up to 40 Hertz
Relative Humidity	Percent	N/A	N/A	Up to 40 Hertz
Barometric Pressure	Pascals	± 200 Pa	6-7 Pa	Up to 40 Hertz

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

Parameter	Units	Accuracy	Resolution	Frequency
North Wind Component u_w	Meters per Second (positive is North)	0.5 m/s	0.01 m/s	Up to 20 Hertz (5 Hertz real time standard)
East wind Component v_w	Meters per second (positive is East)	0.5 m/s	0.01 m/s	Up to 20 Hertz (5 Hertz real time standard)
Latitude	Decimal Degrees	2.4-3.6 m	0.00001 deg	Up to 20 Hertz
Longitude	Decimal Degrees	2.4-3.6 m	0.00001 deg	Up to 20 Hertz
Altitude	Meters	2.4-3.6 m	??? m	Up to 20 Hertz
Aircraft Longitudinal Inertial Velocity u_i	Meters per second (positive is forward)	0.03 m/s	N/A	Up to 40 Hertz
Aircraft Lateral Inertial Velocity v_i	Meters per second (positive is starboard)	0.03 m/s	N/A	Up to 40 Hertz
Aircraft Vertical Velocity w_i	Meters per second (positive is down)	0.03 m/s	N/A	Up to 40 Hertz
Roll	Degrees	0.17 deg	0.01 deg	Up to 40 Hertz
Pitch	Degrees	0.17 deg	0.01 deg	Up to 40 Hertz
Yaw/Heading	Degrees	0.17 deg	0.01 deg	Up to 40 Hertz
True Airspeed	Meters per second	0.1 m/s	???	Up to 40 Hertz
Vertical Wind Component w_w	Meters per second (positive is down)	0.5 m/s	0.01 m/s	Up to 20 Hertz (5 Hertz real time standard)
Sideslip Angle	Degrees	N/A	N/A	Up to 40 Hertz

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

Parameter	Units	Accuracy	Resolution	Frequency
Angle of Attack	Degrees	N/A	N/A	Up to 40 Hertz
Sideslip Angle	Non-dimensional	N/A	N/A	N/A
Angle of Attack	Non-dimensional	N/A	N/A	N/A
Wind Status Flag	0-Solution Invalid 1-Solution Valid	N/A	N/A	Not Available

4. Applanix POS AV 610

The Applanix POS AV is a hardware and software system specifically designed to provide an accurate real-time and post-flight solution for all motion variables using direct geo-referencing. POS AV integrates precision GPS navigation data with inertial technology to get an extremely accurate positional solution. This system can be easily integrated with digital cameras, film cameras, LIDAR systems, SAR systems, and digital scanners with a max rate of 100 hertz time tagging. The system includes a POS Computer System (PCS) for computations, an Inertial Measurement Unit (IMU), and a dual-frequency GPS receiver. POSpac is the required software bundle to post-process the POS AV data. Post-processed data can be provided upon request.

This system records the following navigation data in real-time: Time (UTC or GPS seconds), Position (Latitude, Longitude, Altitude), Velocity (North, East, Down), 3-Axis Orientation (Pitch, Roll, Heading), and Rates (Acceleration, Angular Rates). Performance specifications are shown in Table 8-3. The specifications shown in Table 8-3 are for typical performance. Actual results depend on satellite configuration, atmospheric conditions, and other environmental factors.

Table 8-3: Applanix POS AV Performance Specifications

POS AV 610	SPS ¹	DGPS ²	XP ³	Post-Processed ⁴
Position (m)	1.5-3.0	0.5-2.0	0.1-0.5	0.05-0.30
Velocity (m/s)	0.030	0.020	0.010	0.005
Pitch and Roll (deg)	0.005	0.005	0.005	0.0025
True Heading (deg)	0.030	0.030	0.020	0.005

¹ Standard Positioning Service

² Differential Global Positioning Service

³ Omnistar XP Service, subject to regional coverage. Subscription sold separately

⁴ POSPAC MMS

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

5. Camera Systems

Forward and nadir-looking Axis 223M series digital network cameras are installed on the aircraft at all times. These cameras provide Universal Time Code (UTC) time-stamped forward and nadir video for recording and for display over the on-board ASDE network. These video files are made available for experimenter download on the archive server website. Various additional camera systems can be installed for missions requiring supplementary photographic or video coverage. Contact DC-8 staff to inquire about additional camera options and capabilities.

6. Dropsonde System

A launch tube for the release of standard and Vaisala Radiosondes can be located in the aft portion of the cabin, at fuselage station 1390L. These sondes parachute to the surface while relaying information on atmospheric conditions back to the aircraft. Experimenters must supply their own sondes as well as signal receiving and recording instrumentation.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

This page intentionally left blank

**NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK**

CHAPTER 9

FLIGHT OPERATIONS

1. Flight Safety

Aircraft flights in general are governed by specific safety rules. Flight conditions in the DC-8 airborne laboratory are different from conditions in commercial passenger airplanes; a major difference is the presence of experimental equipment. This apparatus can pose potential hazards in the aircraft just as it does in conventional laboratories. For this reason, certain safety regulations are implemented for all flights in the DC-8, and specialized safety equipment is carried. All participants in DC-8 flights are required to abide by these regulations, which will be enforced by the command pilot and the mission director. Before flight, an inspection of equipment items in the aircraft will be conducted to assure that they conform to those regulations.

A. Safety Briefings

Safety training sessions are held at the start of each mission. Attendance by all participants is mandatory. These briefings cover the use of emergency exits, life rafts, life vests, fire extinguishers, emergency oxygen (in the event of sudden cabin depressurization), and survival methods following a ditching or Arctic surface landing.

B. Specialized Safety Equipment

The DC-8 carries safety equipment equal to, and often exceeding that carried by comparable passenger aircraft.

1) Seat Belts

All passenger seats are equipped with a combination seat belt and shoulder harness. This must be used during take-off and landing, and whenever the seat belt sign is illuminated. The pilot will indicate when its use is required. The mission director will ensure that all passengers comply.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

2) Fire Protection Equipment

A wide variety of fire protection devices are located throughout the aircraft. Two fireboards with fire fighting equipment are located in the main cabin, and one fireboard is located in each cargo hold adjacent to access hatches. Each of these fire boards includes a fire extinguisher (Halon), fireproof gloves, a fire axe, a smoke mask, a seatbelt cutter, and an emergency oxygen bottle.

In addition, individual emergency passenger oxygen system (EPOS) smoke hoods, are provided for both experimenters and the flight crew. These fire hoods provide a 30-minute oxygen supply and are located in the center armrest of each seat pair.

3) Water Survival Equipment

There are four life rafts carried on all flights over water. They are located in the main cabin - two in the ceiling adjacent to the overwing emergency exits, one forward and one aft near the cabin doors. The rafts contain enough rations and gear to sustain each person for one week.

Individual life vests are stowed in the center armrest of each seat pair. The bottom cushion of each seat can be easily removed and used as a flotation aid.

4) Arctic Survival Equipment

Arctic survival kits are carried on all flights over Arctic regions. These kits will sustain each person for one week. They are contained in duffels adjacent to the overwing emergency exits or the aft cabin doors. In addition, virtually all the contents of the life rafts can be used in Arctic conditions. Emergency protective clothing (outer garments) is also provided for each flight participant. These are vacuum packed in duffels stored in the cabin and cargo compartments and are for emergency use only. Arctic clothing for non-emergency ground use, and all inner clothes layering, are the responsibility of the individual.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

5) Emergency Exit Lighting

In case of an emergency, a lighting system will automatically illuminate exit signs at each door. Lights located on the seats or experimenter racks will also illuminate the aisles to facilitate egress from the aircraft.

6) Automated External Defibrillator

An automated external defibrillator (AED) is mounted at the rear of the DC-8 cabin for the delivery of early defibrillation to victims of sudden cardiac arrest. Designated aircraft crewmembers are trained in the maintenance and use of this equipment.

In addition, several dedicated medical breathing oxygen bottles are available. These bottles are equipped with cup masks for comfortable use.

C. In-flight Safety

NOTE: Significant information for in-flight safety is outlined below.

1) Emergency Oxygen Equipment

Oxygen masks are located throughout the cabin in the overhead compartments or designated surface mounted boxes. They are within convenient reach of all participants when seated. Should the need arise, the bottom of the compartment or box will automatically open, and the oxygen masks will drop down. The crewmembers and the mission director have portable emergency oxygen bottles, and can assist anyone on the aircraft.

2) Intercom Regulation

The aircraft intercom system enables the mission director to monitor experimenter operations and become aware of any safety-related problem immediately. At least one member of each research group is required to be on the intercom at all times. Extra-length cables can be provided if necessary to aid experiment operations.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

3) Cargo Areas

Access to cargo areas is permitted in flight, but not during take-off and landing. Also, at aircraft altitudes above 25,000 ft, the experimenter must be accompanied by an aircraft crewmember while in the cargo area. Experimenters must inform the mission director before moving into the cargo areas. They must remain on the intercom while in the cargo area, and must confirm their return to the main cabin with him/her.

4) Proper Attire

Sandals and open-toed or high heel shoes are not allowed in the Experiment Integration Facility, the hangar, or the DC-8. Also, skirts and shorts are not appropriate flight attire for the DC-8. Flight participants wearing these will be asked to change into long pants or a flight suit before being allowed to fly.

5) Airport Security

DC-8 flight participants are warned not to carry items on the DC-8 that are restricted within airport security areas (illegal substances, weapons, etc.) Keep tools aboard the DC-8. Prior to transit flights, the mission manager will check for visa, passport, and other required identification.

6) Optical Windows

An aircraft crewmember will inspect optical windows after take-off and report their status to the mission director. The mission director will then clear the windows for use (rules governing the use of safety slides are covered in chapter 4).

7) Repair Equipment

Electric motor-driven hand tools, heat guns, pencil-type soldering irons, and soldering guns cannot be used in flight. Use of volatile solvents on the DC-8 is not permitted in flight, and must be cleared for use on the ground.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

8) Smoking

Smoking is not permitted at any time on the DC-8 or in any DFRC building.

D. Additional Safety Considerations

NOTE: Additional safety considerations are outlined below.

1) Engineering Check Flights

When all the experimental equipment for a mission has been installed, but prior to the scientific data flights, one or more check ("shake-down") flights are made. Experimenters may not participate in these flights.

2) Liquid Disposal

Beverage cups and open containers should not be left unattended, particularly around experimental equipment where accidental spillage could damage electronic components. Glass beverage containers are not allowed on the aircraft, and no liquids are allowed in the overhead compartments.

3) Flight Insurance

Participants must arrange for their own insurance. Please be advised that the DC-8 is operated as a public law aircraft, and as such does not have, or require, a certificate of airworthiness issued by the Federal Aviation Administration. As a consequence, many commercial riders to insurance policies may not provide insurance protection. Insurance can be purchased from commercial sources, on a yearly basis, covering flights on the DC-8 within the U.S. and overseas. Consult with your insurance agent about the coverage of policies you hold.

4) Medical Clearance

DC-8 flight participants must be free from significant medical conditions, which would put the individual at risk from flight or travel to another country. Contact the mission manager for specific requirements.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

2. Flight Management

Various aspects of the DC-8 flight management regimen follow.

A. Aircraft Crew

The aircraft crew consists of the flight crew (pilot, copilot, flight engineer, and navigator), the mission director and assistant mission director, and two technicians. The mission director provides the direct link between experimenters and the flight crew. Stationed at the main control console, he/she arranges for power, gives pertinent instructions over the intercom, and provides general assistance to the experimenters.

Two technicians accompany each flight to operate the housekeeping equipment (time code generator, TV system, and recorders), to operate the ICATS, and to service the intercom and power systems, if necessary. They may be available to assist experimenters with limited in-flight repairs if the mission director permits. A photo technician is available to operate DFRC camera equipment, when necessary.

B. Flight Planning

General flight plans are developed before the start of the flight period. Experimenters should develop desired plans and acceptable alternates in consultation with the mission manager and navigator. Flight planning can be a lengthy process, and may require several iterations to develop a plan satisfactory to all personnel concerned. In addition, flight over foreign countries requires approval of specific flight plans by the host country well in advance (at least two months) of the actual flight period.

Selection of a specific flight plan should be made at least a day in advance, or in accordance with guidelines developed for each specific mission. This will allow the Airborne Science flight planners time to incorporate minor changes, update weather information, and obtain clearance, prior to pilot review and approval. Copies of the flight plans are available from the mission director.

C. Logistics

Logistical considerations (notice of flight times, flight meals, and offbase operations) are briefly outlined in the following text.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

1) Flight Times

A notice will be posted in the Experiment Integration Facility, at the Airborne Science Directorate office, and on the aircraft, giving the time and date of each flight. It will also state the time for power-up and door closing. The aircraft door is closed well in advance of the take-off to permit necessary checks to be made. Any experimenter not on board by that time will miss the flight.

2) Flight Lunches

Experimenters are generally responsible for their own lunches. However, the aircraft galley may be provisioned for flights originating from locations where the purchase of a bag lunch by an individual is inconvenient. This will be announced prior to the flight. Bottled water, coffee, tea, packages of instant soup, and a microwave oven are available in the galley area at the rear of the main cabin.

3) Deployed Operations

Experiment installation and checkout are completed at DFRC before transit to a deployment site. Whenever possible, experimenters and their support team members will be accommodated on this transit flight. However, as the ground crew may also be on the transit flight, it may be necessary to limit team size. Some participants may be required to fly commercially to the deployment site. The mission manager will assign available space for experimenter teams on the DC-8. Experimenters' baggage is hand carried aboard the aircraft. Each piece should be identified with the owner's name.

Within size and weight limits, which vary for each mission, experimenters may carry spare parts for their experiments on the aircraft. Special arrangements can be made for shipping larger amounts of spare equipment and supplies.

DFRC Airborne Science Directorate Office or the designated science-project office normally make arrangements for housing, group transportation at deployment sites, and for customs inspections in

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

foreign countries. The mission manager will publish details of these arrangements including visa and passport requirements in an experimenters' bulletin.

4) Housekeeping Considerations

Experimenters are responsible to pick up and clean up after themselves. Tools, while not in use, must be properly stowed away and trash or debris must be disposed of in an appropriate manner.

D. Experiment Operational Considerations

NOTE: Operational matters of concern to experimenters are included below.

1) Electrical Power Blackouts

A power interruption of a few minutes occurs when the engines are started, during the change over from ground power to aircraft power. The mission director informs all experimenters, and requires shutdown of all experiments for this period. A similar delay occurs at the end of a flight, when the engines are shut down. Prior arrangements should be made if electrical power is needed for post-flight calibration or other purposes.

2) Cabin Environment

For high altitude cruise conditions, the cabin is pressurized to an equivalent of 7,500 ft (2.286m) altitude, and temperature is maintained at 65 to 75 °F (18 to 24 °C). Relative humidity normally decreases with time in flight, from the local airfield value at takeoff to a relatively stable 10 to 15 percent within an hour or two (cargo areas are pressurized the same as the cabin, but some areas remain at a lower temperature). Cabin lighting can be controlled as required by experiments. Special provisions should be made for the local control of temperature-sensitive and/or light-sensitive equipment. The mission manager can advise on these matters.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

3) In-Flight Repairs

Experimenters may work on their equipment in flight if it is necessary and can be done without affecting other experiments or creating an unsafe condition. However, the mission director's approval must be obtained before any repair work may begin. Equipment removed from its usual position must be replaced securely before landing. The use of aisle space for repairs is not permitted.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

This page intentionally left blank.

**NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK**

CHAPTER 10

GROUND OPERATIONS

1. General Definition

The full and continuous involvement of the experimenters and their teams is required during the mission integration and operation periods at DFRC. Experimenters are responsible for the timely completion and submittal of the "Dryden Airborne Science Investigator Questionnaire", available from the mission manager. Once at DFRC, the experimenter is responsible for the assembly, installation, checkout, and operation of their equipment, to specified aircraft standards. The mission manager is responsible for all the mission functions, facilities, schedules, reviews, and support resources. The mission manager and the Airborne Science staff are always prepared to assist in the solution of problems that may arise.

2. Experiment Assembly and Checkout

Assembly and checkout of all the experiments involve the following elements:

A. The Airborne Science Laboratory

The Airborne Science Laboratory is located on the ground floor of the Dryden Aircraft Operations Facility (DAOF). The lab provides an area for assembly and checkout of experiments before their installation on the aircraft. Incoming equipment is delivered to this point. The lab manager will provide supplies and other routine services on request.

Lab facilities include: 60-Hz, 400-Hz, and 28 VDC power, and compressed air. Gaseous and liquid nitrogen and helium are available for cryogenic or other use by advance request to the mission manager. The mission manager will assure a continuing supply; however, he/she should be advised well in advance of requirements for additional amounts of liquid helium. Approved fasteners and other equipment mounting hardware are also available.

Tools belonging to NASA DFRC and contractor personnel are not for loan. Experimenters are encouraged to bring a complete set of needed tools with them.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

All tools belonging to the experimenters are to have identification markings on them. It is expected that the tools will be inventoried and a system of control over the tools will be used during equipment installation and while on deployment.

The lab is open in the morning at 7:30 a.m. and can be made available for evening work. For safety reasons, two or more people must be present in the lab at all times. Requests for evening use must be coordinated with the mission manager.

B. Support Services

The mission manager will arrange engineering, fabrication, and safety resources, as needed, to support mission activities. The staff includes a DC-8 operations engineer who can assist the experimenter with the interface of equipment to the aircraft. The operations engineer is responsible for the airworthiness of the aircraft, the proper integration of the payload, and the safe disposition of aircraft maintenance and inspection issues. He/she is available for questions regarding aircraft ground operations, airworthiness approvals of experimenter equipment, and integration issues.

Technicians are located near the lab and can assist in the interfaces between the experiments and aircraft systems such as aircraft power, DDS, and the timing system. The technicians are assigned to the aircraft, and are not available to support work on experimental equipment. Experimenters should include an electronics technician on their team, if the need for such assistance is anticipated during experiment assembly and checkout. For special needs, it is not unusual for experimenters to arrange for electronics support from local suppliers of specific equipment.

The metal fabrication shops at DFRC are equipped to make special mounting hardware. However, unless requirements are discussed, and agreement reached during the early planning phase with the mission manager, it is assumed that the experimenter will provide such items. Requests for minor adjustments or small brackets can be handled on short notice during assembly.

NOTE: Shop facility's ability to support short notice requests or requirements may be limited by other priorities.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

C. Inspection

Before any equipment may leave the lab for installation in the aircraft, an inspection is required for its compliance with all safety requirements. The aircraft inspectors will explain any irregularities and suggest ways of handling them. A clipboard with a discrepancy sheet will be attached to each rack to indicate any problem and proper corrective actions.

The inspectors and operations engineer are generally available throughout the checkout period, and they should be asked for advice and assistance regarding the need for straps, trays, or other special restraints during the process of assembly. The inspectors also look for other safety hazards, such as equipment with sharp or projecting edges, and they will request that such hazards be corrected (such as padding with a suitable material). The inspection will also cover conformity to electrical safety requirements. The inspector will check to see that all the cabling is properly secured and protected against abrasion. A check will be made to ensure proper equipment operation without tripping the ground fault interrupter (GFI) devices.

D. General Procedures

The assembly and checkout period should be used to full advantage since problems delayed until installation can impact the scheduled sequence of operations for all the experimenters. It is customary to hold daily formal group meetings, at which the experimenters discuss their progress and problems with the mission manager and operations engineer. Timely action will be initiated to resolve problems that may delay the installation schedule.

To assure a successful final inspection and corresponding safety approval, the experimenter should consult frequently with the mission manager and the operations engineer during assembly concerning the use of support hardware, fasteners, and cable ties. The operations engineer will be available to sketch small brackets for fabrication, to recommend structural changes to existing hardware, and to arrange for items to be mounted on top of racks.

Each item of equipment must be weighed and its weight marked on it (removable tape may be used). An inspector can then readily check the total calculated weight and the overturning moment of each rack. Scales are available adjacent to the lab.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

Storage bins in which small test equipment, tools, notes, tapes, etc. may be stored, are available for panel mounting on the racks. The operations engineer will arrange for these bins on request.

Operation of all equipment should be checked out in the lab. Power connectors for both 60 and 400-Hz, identical to those used in the aircraft, are available. These connectors should be used to ensure that assembled equipment, in each rack, will not trip the GFI devices in the aircraft.

E. Safety and Emergency - Hangar

CAUTION: Significant instructions for hangar safety are listed below.

At DFRC/DAOF, experimenters work in an environment generally unavailable to the public. The lab is housed in a large hangar containing a number of aircraft, and it is sometimes necessary to walk through the hangar and on to the ramp area. Therefore, a certain number of safety precautions must be observed:

- 1) Smoking in the hangar, on the ramp, or in any DFRC/DAOF building is prohibited.
- 2) Look out for cables, hoses, boxes, tow bars, moving vehicles, and movement of the hangar doors when crossing the hangar floor.
- 3) Do not walk directly across the ramp. Travel along the edges of the ramp when entering or exiting the DC-8 outside.
- 4) Do not approach aircraft with engines running. Jet exhaust or prop wash is dangerous for a considerable distance behind the aircraft.
- 5) Wear adequate clothing and shoes that totally enclose the foot.
- 6) Ear protection is required while outside the aircraft when engines are running.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

IN AN EMERGENCY

If a DFRC employee is not available for immediate assistance,
dial this number from any phone:

911
For Emergency Aid
Fire, Accident, Etc.

This emergency number is available at any hour. Callers should also be able to describe their location, so that emergency help can respond promptly.

3. Installation of Experiments

Following inspection and approval of equipment for aircraft installation, DC-8 technicians will transport and install it in the aircraft. They will be working to the cabin floorplan drawing and time schedule provided by the mission manager. The experimenters or their representative must be present during installation to advise and assist as necessary. Following the mechanical installation, the technicians will work with the experimenter. They will complete the cabling installation from the aircraft systems to the experiment, and they will advise as requested on cabling between racks and other experiment equipment.

No work may be done in the aircraft unless a crewman or other designated DFRC/DAOF DC-8 representative is present (aircraft doors may not be opened or closed by any experiment personnel). The aircraft is usually available on a split-shift basis, from 7 a.m. to 7 p.m., or a two-shift basis, from 7 a.m. to 11 p.m. Additional time, including weekends, requires overtime for the ground crew and must be arranged for in advance. Budgetary limitations may preclude time in excess of two shifts on a five-day-week basis.

If special positioning of the aircraft is required for experiment alignment or checkout, the mission manager or operations engineer should be notified a week or more in advance. This will allow time for obtaining the proper approval, and scheduling of ramp activities. Laser tests require NASA and FAA approval, which often require several weeks' time.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

A. Electrical Power

Power is normally available on the aircraft for checkout when the aircraft is in the hangar or parked on the ramp. At these times, power comes from the ground generators producing 400-Hz ac. The stability of these sources is not necessarily as well controlled as the aircraft engine generators used in flight. Power in 60-Hz form is obtained from the electronic converters in the aircraft, or from an external source of ground power.

CAUTION: Power distribution in the aircraft is controlled from the mission director's station. Experimenters are not authorized to switch power at this location. Upon request, only the aircraft technicians, the mission manager, his/her assistant, the operations engineer, or a member of the ground crew will switch power to the appropriate station.

Due to periodic maintenance and/or installation procedures, the ground crew may need to shut down electrical power for short periods of time. If power is needed for an uninterrupted period of time for checkout of experimenter equipment within the aircraft, the mission manager or operations engineer must be advised well in advance. This will allow the work of the ground crew on the aircraft to be coordinated with experimenter's needs.

The mission manager will designate a time for a power check of all experiments. Each experiment's power station will be turned on sequentially to make current measurements at the mission director's console. This procedure is necessary to balance loads among the five 60-Hz converters, and to minimize interference among experiments from power transients. This also provides an opportunity for experimenters to check for interference from other experiments.

B. Weight and Balance

Following equipment installation, before any mission flights, the aircraft will be weighed and the balance calculated to determine the center of gravity. Thereafter, weight and location of any equipment that is added or removed must be noted on the record sheet for that purpose, posted near the front door of the aircraft. No removals or add-ons will be permitted less than two hours before door-close on fly-days. This procedure is necessary to maintain the current weight and balance record. Each experimenter is responsible for his own equipment (tool boxes, boxes of manuals, etc.), and must post entries when items are removed (even for short periods of time) or returned.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

C. Safety and Inspection - Aircraft

CAUTION: Significant instructions for aircraft safety are listed below.

While working in the aircraft on the ground, all participants must observe the following safety rules.

- 1) No Smoking in the hangar, on the ramp, aboard the aircraft, or in any DFRC/DAOF buildings.
- 2) No electric drills or other tools with universal electric motors may be used in the aircraft.
- 3) Only small, pencil-type soldering irons and electronic-grade rosin-core solder may be used on the aircraft.
- 4) No high wattage heat guns are permitted on the aircraft. If it becomes necessary to heat shrink insulation, the material must be taken into the lab, where such treatment can be performed safely.
- 5) No volatile solvents of any kind are permitted without prior approval of the mission manager.

The inspectors will recheck each experiment installation on the aircraft for full conformity with all safety regulations. Any deficiencies will be noted on an inspection sheet and attached to each rack. These must be signed-off before flight.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

4. The Flight Period

Prior to the scheduled mission flights, a series of check flights will be accomplished. The operations engineer will plan and conduct an engineering "shakedown" flight, which verifies the structural integrity and loading of the newly configured aircraft. No experiments will be powered on and no experimenters will be on board for this flight. The mission manager will conduct one or more experiment check flights at simulated mission conditions. The purpose of these check flights is to allow experimenters to verify the correct operation of all their equipment, and to become familiar with the flight environment and procedures. These and the subsequent mission flights are scheduled to allow the necessary ground time for aircraft and instrument maintenance procedures.

Generally, the aircraft will be open to experimenters only at stated times, to allow for both research requirements and aircraft maintenance activities.

The experimenters and their teams are expected to observe the procedures and constraints stated in this and the preceding chapters, as well as other limits that may need to be set by the mission manager or operations engineer.

Data processing between flights that requires DFRC/DAOF support should be arranged in advance through the mission manager.

5. Post-Flight Activities

When the flight period is completed, one or two days are scheduled for removal of experiments under the supervision of the operations engineer.

Equipment can be removed rack by rack, or by hand-carrying the various components, at the experimenter's discretion. Equipment is then returned to the Airborne Science Lab, where research teams pack it for return shipment. Once the experiment team completes the packing, DC-8 shipping and receiving personnel will arrange for transport.

The mission manager will hold a mission debriefing to review results, complete requests for aircraft systems data, and to arrange for post-mission science reviews, if required. The mission manager will also provide any mission related data held in the DC-8 data distribution files, upon request. Conversely, the mission manager requests that a copy of any published research results be sent to the mission manager, in order that science accomplishments may be documented.

**NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK**

APPENDIX A

GUIDELINES FOR EXPERIMENTER RACK LOADING

1. Guidelines

Standard DC-8 experimenter racks for mounting test equipment are available in three sizes (low, medium, and high), which are illustrated in figures 5-4 thru 5-6 of this handbook. This appendix presents the allowable loading limits for these racks, and the calculations for determining suitability of a proposed equipment-loading configuration.

Applicable design criteria that establish the loading limits include a 9g forward "crash" load and a 7g downward "gust" load. Overall rack limits encompass the total rack assembly and its attachment to the aircraft, and face-mounted equipment limits consider installation of individual units into the rack. The rack-loading configuration must satisfy both limits.

Table A-1 addresses the overall effects between rack and aircraft. Total allowable loading values are tabulated for each type of rack, both in terms of total weight and overturning moment (total torque). Values for vertical center-of-gravity of installed equipment must be known. Figure A-1 illustrates the rack geometry used to calculate the overturning moment. Note that maximum allowable load is reduced if unequal weight distribution between bays (left and right) offsets the lateral center-of-gravity (L) away from the center post.

Face-mounted equipment is attached to panels of standard 19 in. width and optional height. The panels bolt onto the edge flanges of either bay on each rack, and can be installed either forward- or aft-mounted (distance between forward and aft faces is 24 in.). Figure A-2 illustrates the geometric convention for panel height (H) and center-of-gravity location (L) of facemounted equipment.

Table A-2 lists the loading limits for face-mounted equipment, as determined by panel height (H), equipment weight (W), moment ($M = W \times L$), and direction of mounting (forward or aft). These limits affect choice of configuration required to install specific equipment. Figure A-3 presents a logic diagram to select type of mounting, whether or not a tray is required, and illustrates four resulting configurations (cases A thru D).

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

Table A-1: Basic loading allowables for low, medium, and high racks.

	Maximum Loads	
	Low/Medium Racks (lb)	High Racks* (lb)
Total Equipment Weight per Rack Mounting Face	300	450
Total Equipment Weight per Rack Bay	300	450
Rack Total Equipment Weight	600	900
Total Moment Produced by Equipment per Rack Bay $\sum M = hw + h_1w_1 + h_2w_2 + \dots$	6,000 in.-lb	9,000 in.-lb

*. For rack load on high racks near limiting value, the lateral center-of-gravity (C.G.) should be located at the vertical center post. C.G. offset may reduce allowable weight:

C.G. Offset, in.	Allowable Weight, lb
3.0	780
6.0	700

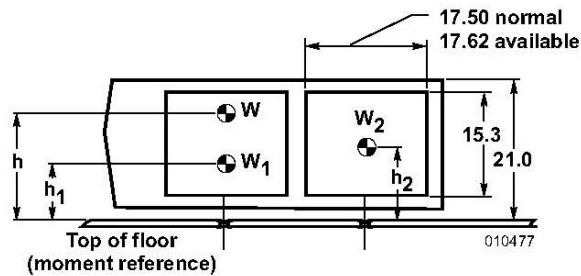


Figure A-1(a). Low rack.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

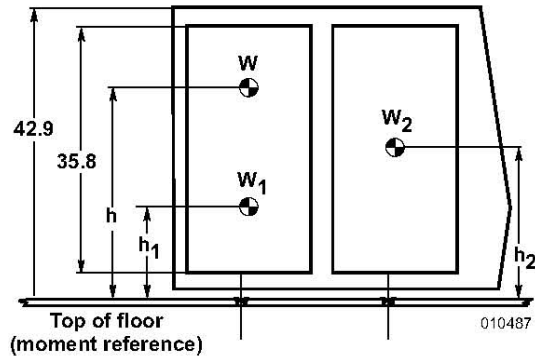


Figure A-1(b). Medium rack.

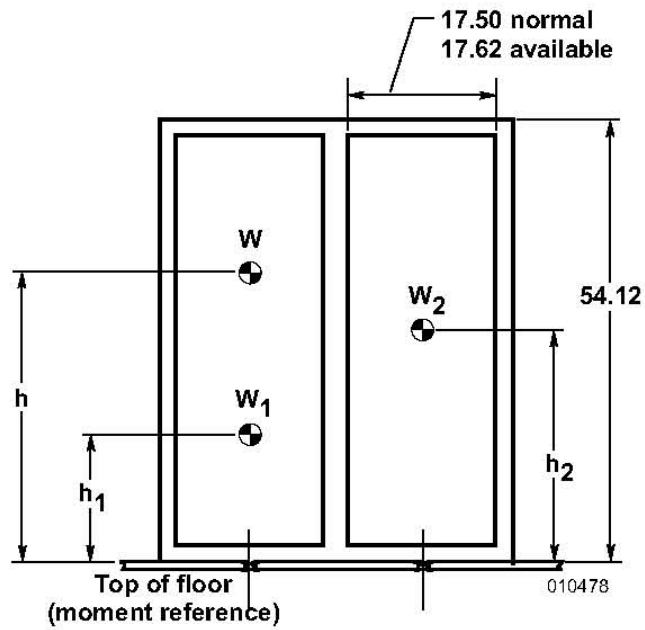


Figure A-1(c). High rack.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

Examples to illustrate usage of table A-2 and figure A-3 to determine suitability and selection of loading configurations are also presented. If questions arise concerning a particular loading configuration or applicable limits, contact the mission manager to request engineering assistance.

2. Examples

Some loading examples with calculations are presented here to illustrate the use of figure A-3 and table A-2. Figure A-3 shows rack-loading options using four types of support (cases A through D). As equipment weight increases, so does the corresponding support and restraint requirements.

The accompanying logic diagram in figure A-3 traces a decision tree to compare actual values against the limits tabulated in table A-2, and thereby determine which loading option is appropriate for each instance and within allowable limits.

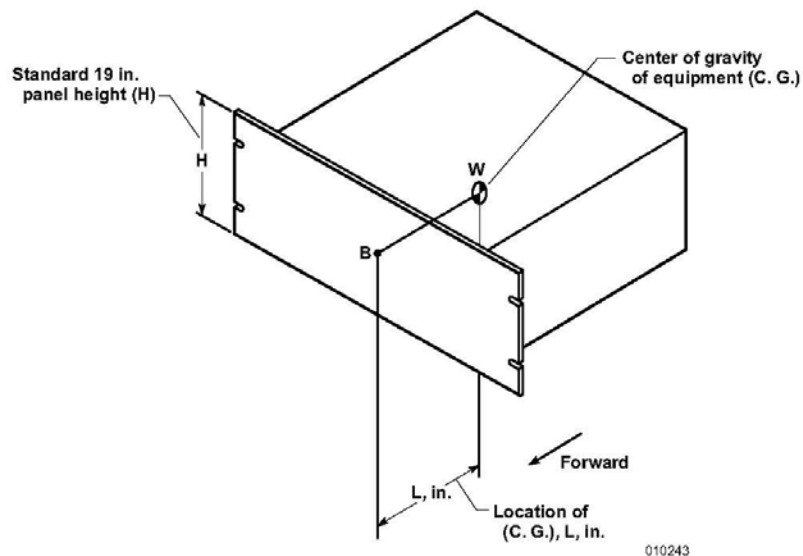


Figure A-2. Standard face mounted equipment

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

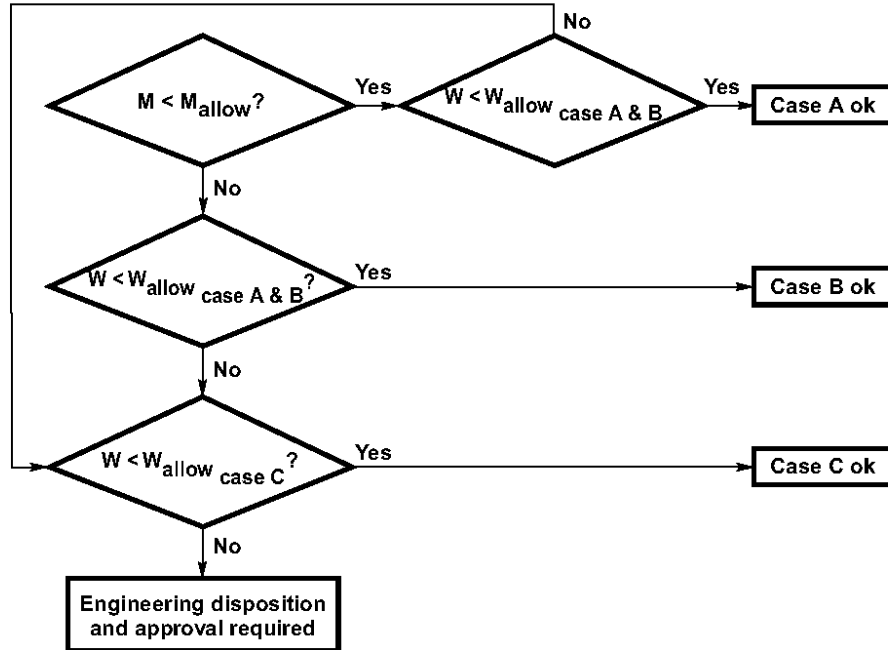
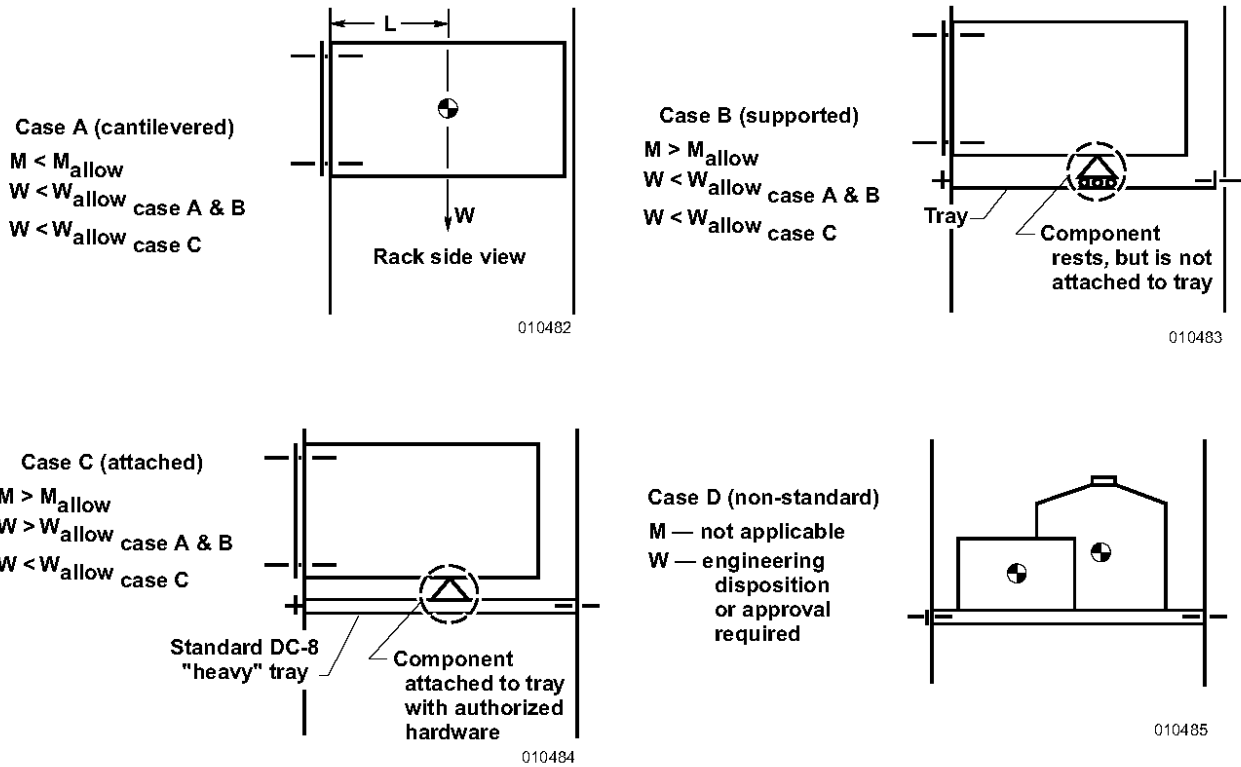


Figure A-3 . Configuration examples and flow chart.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

Table A-2. Allowable loading for face-mounted equipment.

Standard Panel Height (in.)	Low and Medium Rack			High Rack		
	M _{allow} (in.-lb)	W _{allow} Fwd/aft-mount (lb.)		M _{allow} (in.-lb)	W _{allow} Fwd/aft-mount (lb)	
	case A	cases A and B	case C	case A	cases A and B	case C
3.5	73	23/35	38/63	123	53/53	92/129
5.25	84	35/52	50/80	185	79/79	118/155
7	124	46/70	61/98	245	105/105	144/181
8.75	163	58/87	73/115	305	132/132	171/208
10.5	244	70/105	85/133	365	158/158	197/234
12.25	291	81/122	96/150	430	184/184	223/260
14	338	93/140	108/168	490	211/211	250/287
15.75				550	237/237	276/313
17.5				615	263/263	302/339
19.25				675	290/290	329/366
21				735	316/316	355/392
	△1	△1 △2 △4	△3 △4	△1	△1 △2 △5 △6	△3 △5 △6

Case D (figure A-3) requires engineering disposition/approval when equipment weight on tray exceeds 28 lb (Low/Medium Rack, aft-mounted) or 76 lbs (high rack, aft-mounted). Reduce these allowables by 1/2 if tray is fwd-mounted.



Case A (cantilevered)



Case B (cantilevered, supported on standard DC-8 light or heavy tray)



Case C (attached and constrained by standard DC-8 heavy tray)



Values based on 30 lb/in. flange allowable (fwd-mount) and 45 lb/in. flange allowable (aft-mount) in a 9-G forward loading condition



Values based on 101 lb/in. flange allowable (fwd- and aft-mount) in a 9-G forward loading condition



Component lateral CG displaced 25 percent left or right of equipment bay centerline

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

A. Example 1 Rack type medium

Panel height H = 5.25 in.

Equipment weight W = 12 lb

Center of gravity L = 6.0 in

Calculate moment = $W \times L = 12 \times 6 = 72 \text{ in.-lb}$

M_{allow} from column (1) of table A-2 shows an 84 in.-lb limit. W at 12 lb is less than either weight in column (2), so case A applies. The equipment can be simply face-mounted (cantilevered) in a low or medium rack, either forward- or aft-mounted.

B. Example 2 Rack type unspecified

Panel height H = 5.25 in.

Equipment weight W = 15 lb

Center of gravity L = 6.0 in.

Calculate moment = $W \times L = 15 \times 6 = 90 \text{ in.-lb}$

This equipment is only 3 lb heavier than example 1, but the 90 in.-lb moment now exceeds the M_{allow} of 84 in.-lb for case A. It is still below the weight limits of column (2), so case B applies. The equipment can be face-mounted in a low or medium rack, either forward- or aft-mounted, but a tray is needed to help support the equipment. Note that this equipment may be safely mounted in a high rack without a tray.

C. Example 3 Rack type unspecified

Panel height H = 5.25 in.

Equipment weight W = 50 lb

Center of gravity L = 3.5 in.

Calculate moment = $W \times L = 50 \times 3.5 = 175 \text{ in.-lb}$

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

This equipment represents a heavier load, with the center of gravity (L) closer to the face. The moment exceeds low and medium rack allowables (case A), and the weight exceeds the tray-supported limit of case B. However, it is within the aftmounted limit (52 lb) for case B. Note that it could still be forward-mounted in a low or medium rack if it were configured as case C (attached) where 50 lb is just at the limit for forward face-mounted hardware attached to a tray. Note also that it could be cantilevered on a high rack as in case A, where the moment limit is 185 in.-lb.

D. Example 4 Rack type unspecified

Panel height $H = N/A$

Equipment weight $W = 120 \text{ lb}$

Center of gravity $L = 12 \text{ in.}$

This case represents non-standard equipment attached directly to a tray, without any rack facing, as shown in case D. Contact the mission manager to request engineering assistance, as this type of case requires individual consideration. The method of tray installation requires adequate attachment of the tray to the flanges of the rack to properly distribute a 9-g forward load, and is dependent on the equipment configuration being installed.

**NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK**

APPENDIX B

**DFRC AIRBORNE SCIENCE CRYOGENIC
HANDLING PROCEDURES**

1. Scope

Use of cryogenic liquids at DFRC is controlled by Dryden Centerwide Procedure DCP-S-070, "Cryogen Safety". This document contains supplemental information for the use of all personnel that have a need to plan requirements, service, or handle cryogen relative to Airborne Science operations. Areas of operations are defined as DFRC/DAOF or on any deployment, and the DC-8 aircraft and payloads.

2. Purpose

The purpose of this document is to describe the principal hazards and appropriate safety procedures associated with cryogens that are commonly used such as liquid oxygen, hydrogen (not allowed on NASA DC-8), ammonia, nitrogen, helium, argon, fluorine, and carbon dioxide.

3. Equipment Requirements

- Gastech GX-82 three-way gas alarm or equivalent
- Gastech OX-82 oxygen indicator or equivalent
- Gloves, cryogenic
- Apron, Neoprene or heavyweight rubber coated
- Safety glasses
- Goggles
- Full face shield

4. General Properties

Because all cryogenic fluids exist as liquids only at temperatures considerably below ambient (temperatures in the range of -324 °F), normal storage facilities and fluid containment in process systems must allow for the unavoidable heat input from the environment. For ordinary operations this means good insulation, adequate pressure-relief devices, and proper disposal or recycling of the gases that are continually produced. Full containment of the fluid as a liquid at room temperature is usually not feasible: the pressure required to maintain helium at liquid density at room temperature is 18,000 psi; for nitrogen it is 43,000 psi.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

The chemical properties and reaction rates of substances are changed under cryogenic conditions. Liquid oxygen, for example, will react explosively with materials usually considered to be noncombustible. Remember that condensing a cryogen from a pure gas at room temperature will concentrate the material typically 700-800 times.

Cryogenic temperatures drastically affect material properties: ductile materials become brittle, material shrinkage exceeds anticipated values, leaks can develop that are not detectable at room temperature even under considerable pressure, etc. Hence, the suitability of materials must be carefully investigated before they are employed in cryogenic service.

5. Labeling

Storage dewars, process vessels, piping, etc., shall be labeled with the common name of the contents. In many cases, it is also desirable to post emergency instructions, emergency call numbers, etc. adjacent to the equipment.

6. Pressure Relief

Heat flux into the cryogen is unavoidable, regardless of the quality of the insulation provided. Pressure relief must be provided to permit routine off gassing of the vapors generated by this heat input. Typically spring-loaded relief devices or an open passage to the atmosphere best provides such relief.

Additional relief devices should be provided as backup to the operational relief, especially when the capacity of the operational relief device is not adequate to take care of unusual or accident conditions. This may be the case if the insulation is dependent on the maintenance of a vacuum in any part of the system (this includes permanently sealed dewars), if the system may be subject to an external fire, or if rapid exothermic reactions are possible in the cryogen or a container cooled by the cryogen. In each case, relief devices capable of handling the maximum volume of gas that could be produced under the most adverse conditions must be provided. Frangible disks are recommended for this service.

Each and every portion of the cryogenic system must have uninterruptible pressure relief. Any part of the system that can be valved off from the remainder must have separate and adequate provisions for pressure relief.

All parts in contact with the fluid shall be rated for cryogenic service. Careful consideration must be given to material compatibility with respect to prevention of embrittlement at cryogenic temperatures.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

7. Hazards of Oxygen Deficiency

Liquefied gases frequently have a significant potential for creating an oxygen deficiency. When expelled to the atmosphere at room temperature, they evaporate and expand on the order of 700-800 times their liquid volume. Consequently, leaks of even small quantities of liquefied gas can expand to displace large amounts of oxygen, thereby rendering an atmosphere lethal. Without adequate oxygen, one can lose consciousness in a few seconds and die of asphyxiation in a few minutes.

Calculations shall be made to determine whether a given situation of cryogen storage or use will pose an oxygen-deficiency hazard in the event of the worst possible accident. When the level of hazard potential has been ascertained, appropriate safety procedures must be taken. Where the danger is sufficient to warrant it, this may entail the use of an oxygen monitor such as an OX-82 or GX-82. Positions for oxygen monitors should include the lowest point in the area because the cold, dense, escaping gases will be heavier than the warmer ambient air, at least initially.

All employees working in the vicinity of an area where an oxygen deficiency could develop shall be trained as to the nature of the hazard and the appropriate response they should make in the event of cryogen release. Along with training, these areas shall be posted to remind the workers and alert visitors in the area to the hazard.

CAUTION: Any rescue work conducted in an oxygen-deficient atmosphere must be done in a self-contained breathing apparatus or airline equipment.

8. Hazards of Air-Freezing Cryogenics

Certain cryogenics, such as helium and hydrogen, are cold enough to solidify atmospheric air. The system must be pressurized in order to prevent the entry of air into such cryostats. If openings to the atmosphere exist, they are likely to become plugged by solidified air, leading to overpressure and vessel failure if they are relied on for pressure relief. Such conditions will also result in hazardous contamination of the fluid. Again, adequate pressure-relief devices must be provided to vent all gas produced in case of maximum possible heat flux into the system. Unless these fluids are handled in vacuum-jacketed vessels and piping, air will also condense on the exterior of the system. This condensate will be rich in oxygen content. The hazards created by this include frostbite from touching the cold surfaces, dripping liquid air (because it is oxygen-enriched), and exploding insulation. The latter can happen when air condenses between the metal surface and the insulating layer. On warming, the air vaporizes and can rip off the insulation with explosive force. Such insulation systems must be specially engineered to prevent air penetration.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

9. Hazards of Carbon Dioxide Toxicity

In addition to producing an oxygen deficiency, carbon dioxide also affects the breathing rate because of its role in the respiratory process. A concentration of 0.5% carbon dioxide in the air will begin to stimulate a more rapid breathing rate; when 3% carbon dioxide is present in the air, lung ventilation will double; 10% carbon dioxide can be tolerated for only a few minutes. A condition of 10% carbon dioxide and 90% normal air actually has an oxygen concentration of 20.9%. This degree of oxygen deficiency would not be considered immediately dangerous to life or health if the contaminant gas were nitrogen, helium, or argon instead of carbon dioxide. Obviously it is important to measure the carbon dioxide/nitrogen concentration, especially if it is suspected that this gas may be present at levels greater than 0.5%.

CAUTION: Any rescue work conducted in an oxygen-deficient atmosphere must be done in self-contained breathing apparatus or airline equipment.

10. Hazards of Oxygen Enrichment

Cryogenic fluids with a boiling point below that of liquid oxygen have the ability to condense oxygen out of the air if exposed to the atmosphere. This is particularly troublesome if a stable system is replenished repeatedly to make up for evaporation losses; oxygen will accumulate as an unwanted contaminant. Violent reactions (such as rapid combustion or explosions) may occur if the system or process is not compatible with liquid oxygen.

Oxygen enrichment will also occur if liquid air is permitted to evaporate (oxygen evaporates less rapidly than nitrogen). Oxygen concentrations of 50 percent may be reached. Also remember that condensed air dripping from the exterior of cryogenic piping will be rich in oxygen.

11. Personal Protective Equipment

The potential for freezing by contact with the extreme cold of cryogenics necessitates varying degrees of eye, hand, and body protection. When cryogenics are spilled, a thin gaseous layer apparently forms next to the skin. This layer protects one from freezing, provided the contact with the cryogenics involves small quantities of liquid and brief exposures to dry skin. However, having wet skin or exposure to larger quantities of cryogenics for extended periods of time can produce freezing of the tissue.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

The most likely cause of frostbite to the hands and body is contact with cold metal surfaces. Because there is no protective layer of gas formed, frostbite will occur almost instantaneously, especially when the skin is moist.

The damage from this freezing (frostbite) occurs as the tissue thaws. Intense hyperemia (abnormal accumulation of blood) usually takes place. In addition, a blood clot may form along with an accumulation of body fluids, which decreases the local circulation of blood. Gangrene may result if the consequent deficiency of blood supply to the affected cells is extreme.

Cooling of the internal organs of the body can also disturb normal functioning, producing a condition known as hypothermia. It is very dangerous to cool the brain or heart to any great extent.

Using safety glasses with side shields is required at all times when cryogenic fluids are present. Goggles provide the best protection for the eyes. If a cryogen is poured or if the fluid in an open container may bubble, a fullface shield is required. This additional protection is also recommended when valves are actuated on piping systems, etc., unless the operator is shielded from leaks at potential failure points.

Hand protection is primarily required to guard against the hazard of touching cold surfaces. Loose, non-asbestos insulating gloves, that can be tossed off readily in case they become soaked with cryogen, may be worn. Special gloves made for cryogenic work are required.

Cryogenic handlers should wear boots and cuff-less trousers extending over the boot. All persons handling cryogenics shall wear closed-toe shoes that cover the top of the foot. Industrial clothing made of nonabsorbent material is usually satisfactory. Long-sleeved clothing is recommended for arm protection. An apron made of Neoprene or heavyweight rubber coated material is required for use with cryogenics. Where exposure to drenching is possible, a full protective suit with supplied air should be considered; however, the system should be engineered to prevent the possibility of such an exposure.

Tongs or other tools should be used to lift objects out of the liquid or liquid baths.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

12. Immediate Treatment for Frostbite

- Warm the affected area rapidly by immersion in water not to exceed 105 °F, with body heat, or by exposure to warm air. Safety showers with warm water should be provided where there is a sufficient probability of the occurrence of such an accident. In the event of massive exposure, remove clothing while showering. Do not expose the body to open flame. Maintain the affected area of the victim at normal body warmth until professional help arrives.
- Calm the victim and avoid aggravating the injury. People with frostbitten feet should not walk on them. Do not rub or massage the affected parts of the body.
- Prevent infection—use a mild soap to clean the affected area. Dressings need not be applied if the skin is intact.
- If affected, flush eyes with warm water for at least 15 minutes.
- Report to NASA DFRC Health Unit for medical attention promptly.

13. Training Procedures and Safety Notes

Only personnel fully aware of the properties of cryogenic fluids should handle cryogenic materials and equipment. They should be mindful of the consequences of misadventure. Operators should be selected on the basis of capability to understand the hazards and the equipment, mature judgment, and the ability to follow established procedures. Copies of the appropriate MSDS shall be posted in the vicinity of the cryogen being used, handled, or stored.

**NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK**

APPENDIX C

OUTPUT PARAMETERS FROM DDS

1. Introduction

This appendix to DDS description document lists all parameters presently available for selection from the DDS data output file. From this output file, parameters are selected to be distributed on the Ethernet data lines to experimenters, on video displays at each experimenter rack, for post-flight data retrieval and for future data delivery functions. Each data source is identified, and the output data parameters from that source are described. Column 1 lists the parameter identification code (Parameter ID) to be used when retrieving that parameter. Column 2 lists the engineering units for that parameter. Column 3 contains general information on the parameter, which includes parameter name, parameter engineering unit range, sign convention, and other comments regarding the measurement, when applicable.

2. Data From Time Code Generator (TCG)

Note: All parameters from TCG shown below are available in DDS database for use in display, computation and archiving.

Parameter ID	Units	Comments
year	year	Year as measured from GMT Source: IRIG-B May be input manually if IRIG-B invalid.
month	month	The day number of the present date according to GMT. Source: Datum Model 9110-663 TCG Range: 1 to 366
day of month	day	
day of year	days	
time in hr	hr	Time: time code values combined in ICATS available to user in real time and post-flight. ASCII format. Range: 00:00:00.000 to 23:59:59.999
time in sec	sec	
time in msec	msec	

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

3. Data From Honeywell Embedded GPS/INS MIL-STD-1553

Note: All parameters from GPS/INS shown below are available in DDS database for use in display, computation and archiving.

Parameter ID	Units	Comments
eo06_egr_lat	deg	e egr-lat
eo06_egr_lon	deg	e egr lon
eo06_egr_alt	ft	e egr alt
eo06_egr_vel_east	ft/sec	e vel east
eo06_egr_vel_north	ft/sec	e vel north
eo06_egr_vel_up	ft/sec	e vel up
eo17_mode_word1	n/a	e mode w/1
eo17_velocity_x	ft/sec	e vel x
eo17_velocity_y	ft/sec	e vel y
eo17_velocity_z	ft/sec	e vel z
eo17_platform_az	deg	e plat az
eo17_roll_angle	deg	e roll
eo17_pitch_angle	deg	e pitch
eo17_pres_true_hdg	deg	e hdg true
eo17_pres_mag_hdg	deg	e hdg mag
eo17_accel_x	ft/sec ²	e acc x
eo17_accel_y	ft/sec ²	e acc y
eo17_accel_z	ft/sec ²	e acc z
eo17_msl_alt	ft	e alt msl
eo17_mode_word2	n/a	
eo17_roll_rate	deg/sec	e roll rate
eo17_pitch_rate	deg/sec	e pitch rate
eo17_yaw_rate	deg/sec	e yaw rate
eo19_lon_accel	ft/sec ²	e acc long
eo19_lat_accel	ft/sec ²	e acc lat

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

Parameter ID	Units	Comments
eo19_normal_accel	ft/sec ²	e acc nor
eo19_roll_ang_accel	deg/sec ²	e acc r ang
eo19_pitch_ang_accel	deg/sec ²	e acc pang
eo19_yaw_ang_accel	deg/sec ²	e acc y ang
eo19_blended_lat	deg	e blend lat
eo19_blended_lon	deg	e blend long
eo25_true_air_spd	kn	e true a/s
eo25_pres_mag_gnd_	trk deg	e mag gnd trk
eo25_pres_drft_ang	deg	e drift ang
eo27_pres_pos_lat	deg	e pres lat
eo27_pres_pos_lon	deg	e pres long
eo27_wind_direction	deg	e wind dir
eo27_wind_velocity	kn	e wind vel
eo27_pres_gnd_spd	kn	e gnd spd
eo27_pres_true_gnd_trk	deg	e tru gnd trk
eo27_predicted_gnd_spd	kn	e pred g/s
eo27_position_err_north	nmi	e pos-err n
eo27_posi_error_east	nmi	e pos-err e

4. Data From Radar Altimeter MIL-STD-1553 Data

Parameter ID	Units	Comments
ra_01_mode_word	n/a	
radar alt	ft	Radar Altitude - aircraft altitude in feet above land or water as measured by radar. Source: NavCom Defense Electronic, Inc. APN-232 altimeter system. Range: 0 to 70,000 ft
ra_01_rada_alt_rate	ft/sec	Radar altitude rate

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

5. Data From Navigational Management System ARNIC-429

Note 1: Primary source for display and other output uses of nms data will be from nms1. nms2 could be selected during flight should one fail. Also mission manager can request DDS operator to select nms1 or nms2 for data source if required.

Note 2: All parameters shown below are available in DDS database for use in display, computation, and archiving.

Parameter ID	Units	Comments
dist to go	nmi	Distance to go- the distance measured along a great circle path with respect to the aircraft's present position and the next selected waypoint. Range: + 4,096 nmi Orientation: + to selected waypoint - from selected waypoint
nms time go	min	nms time to go - time to arrive at the next waypoint.
x track dist	nmi	Cross track distance - the distance left or right from the desired track to the aircraft's present position measured perpendicular to the desired track. Range: + 128 nmi Orientation: + right of desired track - left of desired track
des track	deg	Destination track - the great circle on the earth's surface connecting the departure and destination positions or two waypoints measured with respect to true north. Range: 0 to 360 deg
drift angle	deg	Drift angle: the angle between the desired track and the aircraft's heading. Range: + 39.9 deg Orientation: + desired track right of aircraft heading - desired track left of aircraft heading

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

Parameter ID Units Comments

nms latitude	deg	Latitude - the aircraft's present latitudinal position over the surface of the earth relative to the equator. Range: + 90 deg Orientation: + north of the equator - south of the equator
nms longitude	deg	Longitude - the aircraft's present longitudinal position over the surface of the earth relative to the prime meridian. Range: + 180 deg Orientation: + east of the prime meridian - west of the prime meridian
ground speed	kn	Ground speed - the aircraft's speed over the ground in kn. Range: 0 to 2,000 kn.
track angle	deg	Track angle - the actual path of the aircraft over the surface of the earth measured with respect to true north through 360 deg. Range: 0 deg to 360 deg
true heading	deg	True heading - the angle between true north and the longitudinal axis of the aircraft. Range: 0 to 360 deg
wind speed	kn	Wind speed - the horizontal velocity of the air mass at aircraft's present position. Range: 0 to 256 kn
wind dir	deg	Wind direction - the direction the wind is coming from as measured from the north. Range: 0 to 360 deg
pitch	deg	Pitch angle - the angle between the longitudinal reference axis of the aircraft and the horizontal plane of the earth. Source: nms Range: + 90 deg Orientation: + up - down

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

Parameter ID	Units	Comments
roll	deg	Roll angle - the angle between the aircraft's lateral axis and a horizontal plane measured about the aircraft's longitudinal axis. Source: NMS Range: + 180 deg Orientation: + right - left
NS velocity	kn	North-South vector velocity - the northsouth vector velocity component of the aircraft's ground speed. Range: + 2000 kn Orientation: + north - south
EW velocity	kn	East-West vector velocity - the east-west vector component of the aircraft's ground speed. Range: + 2000 kn Orientation: + east - west
wind nose	kn	
pres alt	ft	
nms status	n/a	
nms fromto	n/a	
fp hdr	n/a	
msg type	n/a	
dist dest	nmi	
time dest	min	
waypt lat	deg	Waypoint latitude - the latitude of waypoint 'waypt num' Range + 180 deg Orientation: + north of the equator - south of the equator
waypt lon	deg	Waypoint longitude - the longitude of the waypoint 'waypt num' Range + 180 deg Orientation: + east of prime meridian - west of prime merid

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

Parameter ID	Units	Comments
nms_msg1	n/a	
nms_msg2	n/a	
nms_msg3	n/a	
nms_msg4	n/a	
nms_stn_type	n/a	
nms_msg_csum	counts	
nms_tac_freq	MHz	
nms_vor_freq	MHz	
nms_dme_freq	MHz	
nms_hoz_cmd	deg	
nms_plocal_dev	DDM	
nms_glide_dev	DDM	
nms_nav_status	n/a	
nms_frto_ms_to_wpt	n/a	
nms_frto_ms_fr_wpt	n/a	
nms_frto_ls_to_wpt	n/a	
nms_frto_ls_fr_wpt	n/a	
nms_fp_hdr_tot_recd	records	
nms_msgt_wrd_in_msg	n/a	
nms_msgt_wpt_type	n/a	
nms_msgt_wpt_num	n/a	
nms_cal_timetogo	min	
nms_trk_ang_err	deg	
to wyptnum	n/a	
fr wyptnum	n/a	
towypt lat	deg	
towypt lon	deg	
frwypt lat	deg	
frwypt lon	deg	

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

6. Data From Air Data Computer ARINC-429

Note 1: Primary source for display and other output uses of ADC data will be from ADC1. ADC2 could be selected during flight should one fail. Also mission manager can request DDS operator to select ADC1 or ADC2 for data source if required.

Note 2: All parameters shown below are available in DDS database for use in display, computation, and archiving.

Parameter ID	Units	Comments
pressure alt	ft	Pressure altitude - aircraft pressure in ft corresponding to U.S. Standard Atmosphere. Range: -1,871 to 57,343 ft
baro alt	ft	Barometric altitude Range: -1 ,871 to 57,373 ft
stat air tmp	°C	Static air temperature - ambient air temperature at aircraft's present position. Range: -99 to 60 deg C
Mach no.	no.	Mach no. - the aircraft's speed as a ratio to the speed of sound. Range: 0.1 to 0.99
vertical spd	ft/min	Vertical speed - vertical climb rate of the aircraft, measured in ft/min. Range: +20,480 ft/min. Orientation: + ascending - descending
adc tat	°C	ADC total air temperature
ind air spd	kn	Indicated airspeed - indicated airspeed corrected for airspeed indicator instrument error and static pressure source. Range: 30 to 510 kn
true air spd	kn	True airspeed - the actual speed of the aircraft through the air. Computed airspeed corrected for density altitude.
adc_dis_270	n/a	Message word 270 - message when converted to binary contains status of ADC.
adc_dis_350	n/a	Message word 350 - message when converted to binary contains status of ADC.
adc_dis_351	n/a	Message word 351 - message when converted to binary contains status of ADC.

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

7. Data From Global Positioning System (GPS) ARINC-429

Note 1: Primary source for display and other output uses of GPS data will be from GPS1. GPS2 could be selected during flight should one fail. Also mission manager can request ICATS operator to select GPS1 or GPS2 for data source if required.

Note 2: All parameters shown below are available in ICATS database for use in display, computation, and archiving.

Parameter ID	Units	Comments
gps utc time	n/a	GPS time relative to GMT Source: GPS Range: 00:00:00:000 to 23:59:999
gps utc fine	sec	
gps latitude	deg	GPS latitude - the aircraft's present latitudinal position over the surface of the earth relative to the equator.
gps long	deg	GPS longitude - the aircraft's longitudinal position over the surface of the earth relative to the prime meridian. Range: +180 deg Orientation: + east of prime meridian - west of prime meridian
gps alt	ft	GPS altitude - the aircraft's present altitude. Range: -1000 to 131,072 ft.
gps lat fine	deg	
gps lon fine	deg	
gps vert spd	ft/min	
gps ns vel	kn	
gps ew vel	kn	
gps trk ang	deg	
gps_hfom	nmi	
gps_vfom	ft	
gps_status	n/a	
gps time hr	hr	

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

8. Data From Analog Sources and Computed Functions

Parameter ID	Units	Comments
d/f point 2	°C	Dew frost point - 2 stage ambient dew or frost point in degrees Centigrade. Source: General Eastern 1011 C twostage thermoelectric hygrometer system Range: -75 to 50 deg C Source: computed utilizing dfp 2 analog signal, heat/cool 2 analog signal, and max cool 2 analog signal Note: The following state flags appear in thousands digit of the data field: 1 max cooling (internal) 2 max heating (internal) 4 max cooling commanded by operator 5 max cooling (commanded and internal) 6 max cooling (commanded) and max heating internal
ir surf temp	°C	IR surface temperature - the infrared temperature of the surface of the earth or cloud top beneath the aircraft. Source: Heitronics, KT 19.85 nadir viewing, infrared radiometer Range: -65 to 55 degC Note: analog parameter
sat computed	°C	Static air temperature - ambient air temperature at aircraft's present position as calculated from total air temperature corrected for aircraft speed. Range: -99 to 33 degC Source: calculated from total air temperature and Mach no.
pressure (atm)	mb	Ambient atmospheric pressure at aircraft's present position as calculated from pressure altitude. Source: calculated from pressure altitude Range: 114 to 1,050 mb
partpres H ₂ O	mb	Partial pressure of water vapor - the pressure of water vapor as a component of the total atmospheric pressure. Source: calculated parameter from: selectable (d/f point 3 is default) Range: 0.0012 to 388 mb

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

Parameter ID	Units	Comments
specific hum	g/kg	Specific humidity - ambient specific humidity at aircraft's present position as calculated from partial pressure of water vapor and atmospheric pressure. Source: calculated from partpres H ₂ O pressure Range: 0 to 20g water/kg air
H ₂ O sat vp - wtr	mb	Saturated vapor pressure with respect to water - the pressure exerted by water vapor in equilibrium with water when the air mass is over a plane surface of water at the same temperature and pressure. Source: calculated from static air temperature Range: 0.00004 to 125 mb
H ₂ O sat vp-ice	mb	Saturated vapor pressure with respect to ice - the pressure exerted by water vapor in equilibrium with ice when the air mass is over a plane surface of ice at the same temperature and pressure. Source: calculated from static air temperature Range: 0.00002 to 200 mb
rel hum-watr	percent	Relative humidity with respect to water - ambient relative humidity with respect to water - at aircraft's present position. Source: calculated from partpres water and water sat vp Range: 0 to 100%
rel hum-ice	percent	Relative humidity with respect to ice - ambient relative humidity with respect to ice. Source: calculated from partpres water and water sat vp-ice Range: 0 to 100%
local sidereal time	rad	Local sidereal time - the time defined by the daily rotation of the earth with respect to equinox. Uses the local meridian as the terrestrial reference. Source: calculated from year, day, time, longitude Range: 0 to 2 pi radians

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

Parameter ID	Units	Comments
ra sun	rad	<p>Sun right ascension - the arc of the celestial equator measured eastward from the vernal equinox to the foot of the great circle passing through the celestial poles and the sun. Source: calculated from year, day, time Range: 0 to 2 pi radians</p>
dec sun	rad	<p>Sun declination - the angular distance of the sun from the celestial equator. Source: calculated from year, day, time Range: $\pm \pi/2$rad Orientation: + north of the celestial equator - south of the celestial equator</p>
sun el-earth	deg	<p>Sun elevation relative to earth; Sun elevation relative to the horizontal plane of the earth. Source: calculated from 1st, ra sun, dec sun, latitude. Range: ± 90 deg Orientation: + above the horizontal plane of the earth - below the horizontal plane of the earth</p>
sun az-earth	deg	<p>Sun azimuth relative to earth - the azimuth relative to true north. Source: calculated from 1st, ra, sun, dec, sun, latitude. Range: 0 to 360 deg</p>
sun el-ac	deg	<p>Sun elevation relative to aircraft - the sun elevation relative to the horizontal plane of the aircraft. Source: calculated from 1st, ra sun, dec sun, latitude, pitch, roll, true heading Range: ± 90 deg Orientation: + above the horizontal plane of the aircraft - below the horizontal plane of the aircraft</p>

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

Parameter ID	Units	Comments
sun az-ac	deg	Sun azimuth relative to aircraft - the sun azimuth relative to the nose of the aircraft. Source: calculated from 1st, ra sun, dec sun, latitude, pitch, roll, true heading Range: + 180 deg Orientation: + right from nose of aircraft - left from nose of aircraft
sun el rf/ac	deg	Sun elevation - corrected for refraction relative to aircraft. The sun elevation corrected for refraction - relative to the horizontal plane of the aircraft. Source: calculated from sun el-ac, pressure, static air temperature Range: ± 90 deg Orientation: + above the horizontal plane of the aircraft - below the horizontal plane of the aircraft
sun el rf/ea	deg	Sun elevation - corrected for refraction - relative to earth. The sun elevation - corrected for refraction - relative to the horizontal plane of the earth. Source: calculated from sun el-ea, pressure, static air temperature Range: ± 90 deg Orientation: + above the horizontal plane of earth - below the horizontal plane of earth
sun az-left	deg	Sun azimuth - relative to left side of the aircraft. Source: calculated from sun az-ac Range: ± 180 deg Orientation: + right from left of aircraft - left from left of aircraft
sun az-right	deg	Sun azimuth - relative to right side of the aircraft. Source: calculated from sun az-ac Range: ± 180 deg Orientation: + right from right of aircraft - left from right of aircraft

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

Parameter ID	Units	Comments
solar zenith	deg	Solar zenith - the angular distance of the sun from zenith. Source: calculated from sun el-ea Range: 0 deg to 180 deg
ra moon	rad	Moon right ascension - the arc of the celestial equator measured eastward from the vernal equinox to the foot of the great circle passing through the celestial poles and the moon. Source: calculated from year, day, time Range: 0 to 2 pi radians
dec moon	rad	Moon declination - the angular distance of the moon from the celestial equator. Source: calculated from year, day, time Range: $\pm \pi/2$ rad Orientation: + north of the celestial equator - south of the celestial equator
moon el-ea	deg	Moon elevation relative to earth - the moon elevation relative to the horizontal plane of the earth. Source: calculated from 1st, ra moon, dec moon latitude Range: ± 90 deg Orientation: + above the horizontal plane of earth - below the horizontal plane of earth
moon az-ea	deg	Moon azimuth relative to earth - the moon azimuth relative to true north. Source: calculated from 1st, ra moon, dec moon, latitude Range: 0 to 360 deg
moon el-ac	deg	Moon elevation relative to aircraft - the moon elevation relative to the horizontal plane of the aircraft. Source: calculated from 1st, ra moon, dec moon, latitude, pitch, roll, true heading Range: ± 90 deg

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

Parameter ID	Units	Comments
moon az-ac	deg	<p>Moon azimuth relative to aircraft - the moon azimuth relative to the nose of the aircraft.</p> <p>Source: calculated from 1st, ra moon, dec moon, latitude, pitch, roll, true heading</p>
moon el-rf_ea	deg	<p>Moon elevation-corrected for refraction - relative to earth; the moon elevation - corrected for refraction relative to the horizontal plane of the earth.</p> <p>Source: calculated from moon el-ea, pressure, static air temperature</p> <p>Range: ± 90 deg</p> <p>Orientation: + above the horizontal plane of earth - below the horizontal plane of earth</p>
moon_el-rf/ac	deg	<p>Moon elevation - corrected for refraction - relative to aircraft - the moon elevation - corrected for refraction - relative to the horizontal plane of the aircraft.</p> <p>Source: calculated from moon el-ac, pressure, static air temperature</p> <p>Range: ± 90 deg</p> <p>Orientation: + above the horizontal plane of the aircraft - below the horizontal plane of the aircraft</p>
moon az-left	deg	<p>Moon azimuth relative to left of aircraft - the moon azimuth relative to the left side of the aircraft.</p> <p>Source: calculated from moon az-ac</p> <p>Range: ± 180 deg</p> <p>Orientation: + right of the left side of aircraft - left of the left side of aircraft</p>
moon az-rt	deg	<p>Moon azimuth - relative to the right side of the aircraft.</p> <p>Source: calculated from moon az-ac</p> <p>Range: ± 180 deg</p> <p>Orientation: + right of the right side of aircraft - left of the right side of aircraft</p>

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

Parameter ID	Units	Comments
lunar zenith	deg	Lunar zenith - the angular distance of the moon from zenith. Source: calculated from moon el-ea Range: 0 to 180 deg
poten temp	kelvin	Potential temperature - the temperature that a dry air parcel would have if lowered adiabatically to a level of 1,000 mb pressure Source: calculated from static air temperature computed pressure Range: 171.7 K to 601 K
pres alt metric	meter	Pressure altitude in meters - aircraft pressure altitude in meters corresponding to U.S. Standard Atmosphere, 1962. Source: calculated from pressure alt Range: -570 to 17,480 m
cabin alt	ft	Cabin altitude - effective altitude of the aircraft cabin as a function of cabin pressure-as it relates to sea-level. Source: Rosemount Mod 1241 A6CD Range: -1000 to 20,000 ft
nms a/p cmd	n/a	Auto-pilot command status - computed function returns a flag value which tells which nms (if either) is currently in command of the autopilot Output message: If Output = 1 then NMS1 is in command of autopilot Output = 2 then NMS2 is in command of autopilot Output = 3 then autopilot is OFF Output = 4 then an error was detected total air temp ° C Total air temperature

**NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK**

APPENDIX D

IWG1 PACKET FORMAT

The IWG1 Packet Format is the product of the Inter-agency Working Group on Data and Telemetry Standards. It is a comma separated value (CSV) ASCII string. This string is used both for data archival and for real-time broadcast of data within the aircraft on UDP Port 7071.

Example String:

```
IWG1,20010920T145530,15.7738,-96.2707,137.462,,132.551,19971.1,12.725,13.1574,
24.6281,0.00140888,0.0235585,258.411,258.348,0.138373,0.838461,0.492826,0,0,
29.7952,20.2783,29.8763,998.294,0.984893,996.779,0,0,0,0.910509,0.660288,,\r\n
```

Header and Footer: The first column of the IWG1 string is IWG1. This magic cookie is used to uniquely identify strings in the IWG1 format. The string ends with a `\r\n`, ASCII Characters 0x13 and 0x11.

Date: The date parameter is in the ISO-8601 format, yyyy-mm-ddThh:mm:ss.

All subsequent parameters are provided as floating point or integer numbers that are suitable for the ANSI C `strtod` format. Missing parameters are left empty. The following table describes the remainder of the packet:

Parameter	Units	Range	Description
Time	UTC		IOS-8601 formatted date and time
Lat	Degree_N(dec)	-90 to 90	Platform Latitude
Lon	Degree_E(dec)	-180 to 179.9999	Platform Longitude
GPS_MSL_Alt	m		GPS Altitude, Mean Sea Level (MSL)
WGS_84_Alt	m		WGS 84 Geoid Altitude
Press_Alt	Feet		Pressure Altitude
Radar_Alt	Feet	Zero or Greater [3]	Radar Altimeter Altitude
Grnd_Spd	m/s		Ground Speed
True_Airspeed	m/s		True Airspeed
Indicated_Airspeed	Knots		Indicated Airspeed
Mach_Number			Aircraft Mach Number
Vert_Velocity	m/s		Aircraft Vertical Velocity

NASA
DC-8 AIRBORNE LABORATORY
EXPERIMENTER HANDBOOK

Parameter	Units	Range	Description
True_Hdg	Degrees True	0 to 359.9999	True Heading
Track	Degrees True	0 to 359.9999	Track Angle
Drift	Degrees		Drift Angle
Pitch	Degrees	-90 to 90 [1]	Pitch
Roll	Degrees	-90 to 90 [2]	Roll
Side_slip	Degrees		Side Slip Angle
Angle_of_Attack	Degrees	-90 to 90 [1]	Angle of Attack
Ambient_Temp	Degrees C		Ambient Temperature
Dew_Point	Degrees C		Dew Point
Total_Temp	Degrees C		Total Temperature
Static_Press	mbar		Static Pressure
Dynamic_Press	mbar		Dynamic Pressure (total minus static)
Cabin_Press	mbar		Cabin Pressure / Altitude
Wind_Speed	m/s	Zero or Greater	Wind Speed
Wind_Dir	degrees_true	0 to 359.9999	Wind Direction
Vert_Wind_Spd	m/s	[3]	Vertical Wind Speed
Solar_Zenith	Degrees		Solar Zenith Angle
Sun_Elev_AC	Degrees		Sun Elevation from Aircraft
Sun_Az_Grd	Degrees True	0 to 359.9999	Sun Azimuth from Ground
Sun_Az_AC	Degrees True	0 to 359.9999	Sun Azimuth from Aircraft

[1] Negative is nose down, positive is nose up.

[2] Negative is left wing down, positive is right wing down.

[3] Negative is downward, positive is upward.

Additional parameters may be added to the end of the string on a mission-by-mission basis. Parsing software should be written to accommodate parameters beyond the 32 specified. Software and test data for simulating this data feed are available upon request.